
Boost.Container

Ion Gaztanaga

Copyright © 2009-2012 Ion Gaztanaga

Distributed under the Boost Software License, Version 1.0. (See accompanying file LICENSE_1_0.txt or copy at http://www.boost.org/LICENSE_1_0.txt)

Table of Contents

Introduction	3
Building Boost.Container	3
Tested compilers	3
Efficient insertion	4
Move-aware containers	4
Emplace: Placement insertion	5
Containers of Incomplete Types	6
Recursive containers	6
Type Erasure	7
Non-standard containers	10
<i>stable_vector</i>	10
<i>flat_(multi)map/set</i> associative containers	11
<i>slist</i>	12
C++11 Conformance	14
Move and Emplace	14
Stateful allocators	14
Scoped allocators	14
Initializer lists	15
<i>forward_list</i> <T>	15
<i>vector</i> <bool>	15
Other features	16
History and reasons to use Boost.Container	17
Boost.Container history	17
Why Boost.Container?	17
Indexes	18
Boost.Container Header Reference	64
Header <boost/container/allocator_traits.hpp>	64
Header <boost/container/container_fwd.hpp>	67
Header <boost/container/deque.hpp>	234
Header <boost/container/flat_map.hpp>	235
Header <boost/container/flat_set.hpp>	236
Header <boost/container/list.hpp>	237
Header <boost/container/map.hpp>	238
Header <boost/container/scoped_allocator.hpp>	239
Header <boost/container/scoped_allocator_fwd.hpp>	247
Header <boost/container/set.hpp>	248
Header <boost/container/slist.hpp>	249
Header <boost/container/stable_vector.hpp>	249
Header <boost/container/string.hpp>	250
Header <boost/container/vector.hpp>	252
Acknowledgements, notes and links	253
Release Notes	254
Boost 1.53 Release	254
Boost 1.52 Release	254

Boost 1.51 Release	254
Boost 1.50 Release	254
Boost 1.49 Release	254
Boost 1.48 Release	254

Introduction

Boost.Container library implements several well-known containers, including STL containers. The aim of the library is to offers advanced features not present in standard containers or to offer the latest standard draft features for compilers that comply with C++03.

In short, what does **Boost.Container** offer?

- Move semantics are implemented, including move emulation for pre-C++11 compilers.
- New advanced features (e.g. placement insertion, recursive containers) are present.
- Containers support stateful allocators and are compatible with **Boost.Interprocess** (they can be safely placed in shared memory).
- The library offers new useful containers:
 - `flat_map`, `flat_set`, `flat_multimap` and `flat_multiset`: drop-in replacements for standard associative containers but more memory friendly and with faster searches.
 - `stable_vector`: a `std::list` and `std::vector` hybrid container: vector-like random-access iterators and list-like iterator stability in insertions and erasures.
 - `slist`: the classic pre-standard singly linked list implementation offering constant-time `size()`. Note that C++11 `forward_list` has no `size()`.

Building Boost.Container

There is no need to compile **Boost.Container**, since it's a header only library. Just include your Boost header directory in your compiler include path.

Tested compilers

Boost.Container requires a decent C++98 compatibility. Some compilers known to work are:

- Visual C++ >= 7.1.
- GCC >= 4.1.
- Intel C++ >= 9.0

Efficient insertion

Move semantics and placement insertion are two features brought by C++11 containers that can have a very positive impact in your C++ applications. Boost.Container implements both techniques both for C++11 and C++03 compilers.

Move-aware containers

All containers offered by **Boost.Container** can store movable-only types and actual requirements for `value_type` depend on each container operations. Following C++11 requirements even for C++03 compilers, many operations now require movable or default constructible types instead of just copy constructible types.

Containers themselves are also movable, with no-throw guarantee if allocator or predicate (if present) copy operations are no-throw. This allows high performance operations when transferring data between vectors. Let's see an example:

```
#include <boost/container/vector.hpp>
#include <boost/move/utility.hpp>
#include <cassert>

//Non-copyable class
class non_copyable
{
    BOOST_MOVABLE_BUT_NOT_COPYABLE(non_copyable)

public:
    non_copyable() {}
    non_copyable(BOOST_RV_REF(non_copyable)) {}
    non_copyable& operator=(BOOST_RV_REF(non_copyable)) { return *this; }
};

int main ()
{
    using namespace boost::container;

    //Store non-copyable objects in a vector
    vector<non_copyable> v;
    non_copyable nc;
    v.push_back(boost::move(nc));
    assert(v.size() == 1);

    //Reserve no longer needs copy-constructible
    v.reserve(100);
    assert(v.capacity() >= 100);

    //This resize overload only needs movable and default constructible
    v.resize(200);
    assert(v.size() == 200);

    //Containers are also movable
    vector<non_copyable> v_other(boost::move(v));
    assert(v_other.size() == 200);
    assert(v.empty());

    return 0;
}
```

Emplace: Placement insertion

All containers offered by **Boost.Container** implement placement insertion, which means that objects can be built directly into the container from user arguments without creating any temporary object. For compilers without variadic templates support placement insertion is emulated up to a finite (10) number of arguments.

Expensive to move types are perfect candidates for emplace functions and in case of node containers (`list`, `set`, ...) `emplace` allows storing non-movable and non-copyable types in containers! Let's see an example:

```
#include <boost/container/list.hpp>
#include <cassert>

//Non-copyable and non-movable class
class non_copy_movable
{
    non_copy_movable(const non_copy_movable &);
    non_copy_movable& operator=(const non_copy_movable &);

public:
    non_copy_movable(int = 0) {}
};

int main ()
{
    using namespace boost::container;

    //Store non-copyable and non-movable objects in a list
    list<non_copy_movable> l;
    non_copy_movable ncm;

    //A new element will be built calling non_copy_movable(int) constructor
    l.emplace(l.begin(), 0);
    assert(l.size() == 1);

    //A new element will be built calling the default constructor
    l.emplace(l.begin());
    assert(l.size() == 2);
    return 0;
}
```

Containers of Incomplete Types

Incomplete types allow **type erasure** and **recursive data types**, and C and C++ programmers have been using it for years to build complex data structures, like tree structures where a node may have an arbitrary number of children.

What about standard containers? Containers of incomplete types have been under discussion for a long time, as explained in Matt Austern's great article (**The Standard Librarian: Containers of Incomplete Types**):

“Unlike most of my columns, this one is about something you can't do with the C++ Standard library: put incomplete types in one of the standard containers. This column explains why you might want to do this, why the standardization committee banned it even though they knew it was useful, and what you might be able to do to get around the restriction.”

“In 1997, shortly before the C++ Standard was completed, the standardization committee received a query: Is it possible to create standard containers with incomplete types? It took a while for the committee to understand the question. What would such a thing even mean, and why on earth would you ever want to do it? The committee eventually worked it out and came up with an answer to the question. (Just so you don't have to skip ahead to the end, the answer is "no.") But the question is much more interesting than the answer: it points to a useful, and insufficiently discussed, programming technique. The standard library doesn't directly support that technique, but the two can be made to coexist.”

“In a future revision of C++, it might make sense to relax the restriction on instantiating standard library templates with incomplete types. Clearly, the general prohibition should stay in place - instantiating templates with incomplete types is a delicate business, and there are too many classes in the standard library where it would make no sense. But perhaps it should be relaxed on a case-by-case basis, and `vector` looks like a good candidate for such special-case treatment: it's the one standard container class where there are good reasons to instantiate it with an incomplete type and where Standard Library implementors want to make it work. As of today, in fact, implementors would have to go out of their way to prohibit it!”

C++11 standard is also cautious about incomplete types and STL: “17.6.4.8 Other functions (...) 2. the effects are undefined in the following cases: (...) In particular - if an incomplete type (3.9) is used as a template argument when instantiating a template component, unless specifically allowed for that component”. Fortunately **Boost.Container** containers are designed to support type erasure and recursive types, so let's see some examples:

Recursive containers

All containers offered by **Boost.Container** can be used to define recursive containers:

```

#include <boost/container/vector.hpp>
#include <boost/container/list.hpp>
#include <boost/container/map.hpp>
#include <boost/container/stable_vector.hpp>
#include <boost/container/string.hpp>

using namespace boost::container;

struct data
{
    int i_;
    //A vector holding still undefined class 'data'
    vector<data> v_;
    //A list holding still undefined 'data'
    list<data> l_;
    //A map holding still undefined 'data'
    map<data, data> m_;

    friend bool operator <(const data &l, const data &r)
    { return l.i_ < r.i_; }
};

struct tree_node
{
    string name;
    string value;

    //children nodes of this node
    list<tree_node> children_;
};

int main()
{
    //a container holding a recursive data type
    stable_vector<data> sv;
    sv.resize(100);

    //Let's build a tree based in
    //a recursive data type
    tree_node root;
    root.name = "root";
    root.value = "root_value";
    root.children_.resize(7);
    return 0;
}

```

Type Erasure

Containers of incomplete types are useful to break header file dependencies and improve compilation types. With Boost.Container, you can write a header file defining a class with containers of incomplete types as data members, if you carefully put all the implementation details that require knowing the size of the `value_type` in your implementation file:

In this header file we define a class (`MyClassHolder`) that holds a vector of an incomplete type (`MyClass`) that it's only forward declared.

```

#include <boost/container/vector.hpp>

//MyClassHolder.h

//We don't need to include "MyClass.h"
//to store vector<MyClass>
class MyClass;

class MyClassHolder
{
public:

void AddNewObject(const MyClass &o);
const MyClass & GetLastObject() const;

private:
::boost::container::vector<MyClass> vector_;
};

```

Then we can define `MyClass` in its own header file.

```

//MyClass.h

class MyClass
{
private:
int value_;

public:
MyClass(int val = 0) : value_(val){}

friend bool operator==(const MyClass &l, const MyClass &r)
{ return l.value_ == r.value_; }
//...
};

```

And include it only in the implementation file of `MyClassHolder`

```

//MyClassHolder.cpp

#include "MyClassHolder.h"

//In the implementation MyClass must be a complete
//type so we include the appropriate header
#include "MyClass.h"

void MyClassHolder::AddNewObject(const MyClass &o)
{ vector_.push_back(o); }

const MyClass & MyClassHolder::GetLastObject() const
{ return vector_.back(); }

```

Finally, we can just compile, link, and run!

```
//Main.cpp

#include "MyClassHolder.h"
#include "MyClass.h"

#include <cassert>

int main()
{
    MyClass mc(7);
    MyClassHolder myclassholder;
    myclassholder.AddNewObject(mc);
    return myclassholder.GetLastObject() == mc ? 0 : 1;
}
```


Non-standard containers

stable_vector

This useful, fully STL-compliant stable container [designed by by Joaquín M. López Muñoz](#) is an hybrid between `vector` and `list`, providing most of the features of `vector` except [element contiguity](#).

Extremely convenient as they are, `vectors` have a limitation that many novice C++ programmers frequently stumble upon: iterators and references to an element of an `vector` are invalidated when a preceding element is erased or when the vector expands and needs to migrate its internal storage to a wider memory region (i.e. when the required size exceeds the vector's capacity). We say then that `vectors` are unstable: by contrast, stable containers are those for which references and iterators to a given element remain valid as long as the element is not erased: examples of stable containers within the C++ standard library are `list` and the standard associative containers (`set`, `map`, etc.).

Sometimes stability is too precious a feature to live without, but one particular property of `vectors`, element contiguity, makes it impossible to add stability to this container. So, provided we sacrifice element contiguity, how much can a stable design approach the behavior of `vector` (random access iterators, amortized constant time end insertion/deletion, minimal memory overhead, etc.)? The following image describes the layout of a possible data structure upon which to base the design of a stable vector:

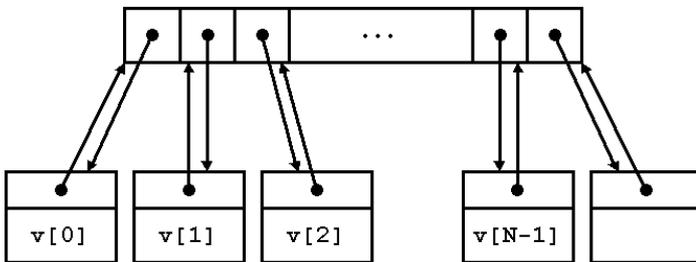

Each element is stored in its own separate node. All the nodes are referenced from a contiguous array of pointers, but also every node contains an "up" pointer referring back to the associated array cell. This up pointer is the key element to implementing stability and random accessibility:

Iterators point to the nodes rather than to the pointer array. This ensures stability, as it is only the pointer array that needs to be shifted or relocated upon insertion or deletion. Random access operations can be implemented by using the pointer array as a convenient intermediate zone. For instance, if the iterator it holds a node pointer `it.p` and we want to advance it by `n` positions, we simply do:

```
it.p = *(it.p->up+n);
```

That is, we go "up" to the pointer array, add `n` there and then go "down" to the resulting node.

General properties. `stable_vector` satisfies all the requirements of a container, a reversible container and a sequence and provides all the optional operations present in `vector`. Like `vector`, iterators are random access. `stable_vector` does not provide element contiguity; in exchange for this absence, the container is stable, i.e. references and iterators to an element of a `stable_vector` remain valid as long as the element is not erased, and an iterator that has been assigned the return value of `end()` always remain valid until the destruction of the associated `stable_vector`.

Operation complexity. The big-O complexities of `stable_vector` operations match exactly those of `vector`. In general, insertion/deletion is constant time at the end of the sequence and linear elsewhere. Unlike `vector`, `stable_vector` does not internally perform any `value_type` destruction, copy/move construction/assignment operations other than those exactly corresponding to the insertion of new elements or deletion of stored elements, which can sometimes compensate in terms of performance for the extra burden of doing more pointer manipulation and an additional allocation per element.

Exception safety. (according to [Abrahams' terminology](#)) As `stable_vector` does not internally copy/move elements around, some operations provide stronger exception safety guarantees than in `vector`:

Table 1. Exception safety

operation	exception safety for <code>vector<T></code>	exception safety for <code>stable_vector<T></code>
insert	strong unless copy/move construction/assignment of <code>T</code> throw (basic)	strong
erase	no-throw unless copy/move construction/assignment of <code>T</code> throw (basic)	no-throw

Memory overhead. The C++ standard does not specify requirements on memory consumption, but virtually any implementation of `vector` has the same behavior with respect to memory usage: the memory allocated by a `vector` `v` with `n` elements of type `T` is

$$m_v = c \cdot e,$$

where `c` is `v.capacity()` and `e` is `sizeof(T)`. `c` can be as low as `n` if the user has explicitly reserved the exact capacity required; otherwise, the average value `c` for a growing `vector` oscillates between `1.25 \cdot n` and `1.5 \cdot n` for typical resizing policies. For `stable_vector`, the memory usage is

$$m_{sv} = (c + 1)p + (n + 1)(e + p),$$

where `p` is the size of a pointer. We have `c + 1` and `n + 1` rather than `c` and `n` because a dummy node is needed at the end of the sequence. If we call `f` the capacity to size ratio `c/n` and assume that `n` is large enough, we have that

$$m_{sv}/m_v = (fp + e + p)/fe.$$

So, `stable_vector` uses less memory than `vector` only when `e > p` and the capacity to size ratio exceeds a given threshold:

$$m_{sv} < m_v \Leftrightarrow f > (e + p)/(e - p). \text{ (provided } e > p \text{)}$$

This threshold approaches typical values of `f` below 1.5 when `e > 5p`; in a 32-bit architecture, when `e > 20` bytes.

Summary. `stable_vector` is a drop-in replacement for `vector` providing stability of references and iterators, in exchange for missing element contiguity and also some performance and memory overhead. When the element objects are expensive to move around, the performance overhead can turn into a net performance gain for `stable_vector` if many middle insertions or deletions are performed or if resizing is very frequent. Similarly, if the elements are large there are situations when the memory used by `stable_vector` can actually be less than required by `vector`.

Note: Text and explanations taken from [Joaquín's blog](#)

`flat_(multi)map/set` associative containers

Using sorted vectors instead of tree-based associative containers is a well-known technique in C++ world. Matt Austern's classic article [Why You Shouldn't Use set, and What You Should Use Instead](#) (C++ Report 12:4, April 2000) was enlightening:

“Red-black trees aren't the only way to organize data that permits lookup in logarithmic time. One of the basic algorithms of computer science is binary search, which works by successively dividing a range in half. Binary search is $\log N$ and it doesn't require any fancy data structures, just a sorted collection of elements. (...) You can use whatever data structure is convenient, so long as it provides STL iterator; usually it's easiest to use a C array, or a vector.”

“Both `std::lower_bound` and `set::find` take time proportional to $\log N$, but the constants of proportionality are very different. Using `g++` (...) it takes `X` seconds to perform a million lookups in a sorted `vector<double>` of a million elements, and almost twice as long (...) using a set. Moreover, the set uses almost three times as much memory (48 million bytes) as the vector (16.8 million).”

“Using a sorted vector instead of a set gives you faster lookup and much faster iteration, but at the cost of slower insertion. Insertion into a set, using `set::insert`, is proportional to $\log N$, but insertion into a sorted vector, (...), is proportional to N . Whenever you insert something into a vector, `vector::insert` has to make room by shifting all of the elements that follow it. On average, if you're equally likely to insert a new element anywhere, you'll be shifting $N/2$ elements.”

“It may sometimes be convenient to bundle all of this together into a small container adaptor. This class does not satisfy the requirements of a Standard Associative Container, since the complexity of insert is $O(N)$ rather than $O(\log N)$, but otherwise it is almost a drop-in replacement for set.”

Following Matt Austern's indications, Andrei Alexandrescu's [Modern C++ Design](#) showed `AssocVector`, a `std::map` drop-in replacement designed in his [Loki](#) library:

“It seems as if we're better off with a sorted vector. The disadvantages of a sorted vector are linear-time insertions and linear-time deletions (...). In exchange, a vector offers about twice the lookup speed and a much smaller working set (...). Loki saves the trouble of maintaining a sorted vector by hand by defining an `AssocVector` class template. `AssocVector` is a drop-in replacement for `std::map` (it supports the same set of member functions), implemented on top of `std::vector`. `AssocVector` differs from a map in the behavior of its erase functions (`AssocVector::erase` invalidates all iterators into the object) and in the complexity guarantees of insert and erase (linear as opposed to constant).”

Boost.Container `flat_[multi]map/set` containers are ordered-vector based associative containers based on Austern's and Alexandrescu's guidelines. These ordered vector containers have also benefited recently with the addition of `move` semantics to C++, speeding up insertion and erasure times considerably. Flat associative containers have the following attributes:

- Faster lookup than standard associative containers
- Much faster iteration than standard associative containers
- Less memory consumption for small objects (and for big objects if `shrink_to_fit` is used)
- Improved cache performance (data is stored in contiguous memory)
- Non-stable iterators (iterators are invalidated when inserting and erasing elements)
- Non-copyable and non-movable values types can't be stored
- Weaker exception safety than standard associative containers (copy/move constructors can throw when shifting values in erasures and insertions)
- Slower insertion and erasure than standard associative containers (specially for non-movable types)

slist

When the standard template library was designed, it contained a singly linked list called `slist`. Unfortunately, this container was not standardized and remained as an extension for many standard library implementations until C++11 introduced `forward_list`, which is a bit different from the the original SGI `slist`. According to [SGI STL documentation](#):

“An `slist` is a singly linked list: a list where each element is linked to the next element, but not to the previous element. That is, it is a Sequence that supports forward but not backward traversal, and (amortized) constant time insertion and removal of elements. Slists, like lists, have the important property that insertion and splicing do not invalidate iterators to list elements, and that even removal invalidates only the iterators that point to the elements that are removed. The ordering of iterators may be changed (that is, `slist<T>::iterator` might have a different predecessor or successor after a list operation than it did before), but the iterators themselves will not be invalidated or made to point to different elements unless that invalidation or mutation is explicit.”

“The main difference between `slist` and `list` is that `list`'s iterators are bidirectional iterators, while `slist`'s iterators are forward iterators. This means that `slist` is less versatile than `list`; frequently, however, bidirectional iterators are unnecessary. You should usually use `slist` unless you actually need the extra functionality of `list`, because singly linked lists are smaller and faster than double linked lists.”

“Important performance note: like every other Sequence, `slist` defines the member functions `insert` and `erase`. Using these member functions carelessly, however, can result in disastrously slow programs. The problem is that `insert`'s first argument is an iterator `pos`, and that it inserts the new element(s) before `pos`. This means that `insert` must find the iterator just before `pos`; this is a constant-time operation for `list`, since `list` has bidirectional iterators, but for `slist` it must find that iterator by traversing the list from the beginning up to `pos`. In other words: `insert` and `erase` are slow operations anywhere but near the beginning of the `slist`.”

“Slist provides the member functions `insert_after` and `erase_after`, which are constant time operations: you should always use `insert_after` and `erase_after` whenever possible. If you find that `insert_after` and `erase_after` aren't adequate for your needs, and that you often need to use `insert` and `erase` in the middle of the list, then you should probably use `list` instead of `slist`.”

Boost.Container updates the classic `slist` container with C++11 features like move semantics and placement insertion and implements it a bit differently than the standard C++ `forward_list`. `forward_list` has no `size()` method, so it's been designed to allow (or in practice, encourage) implementations without tracking list size with every insertion/erasure, allowing constant-time `splice_after(iterator, forward_list &, iterator, iterator)`-based list merging. On the other hand `slist` offers constant-time `size()` for those that don't care about linear-time `splice_after(iterator, slist &, iterator, iterator)` `size()` and offers an additional `splice_after(iterator, slist &, iterator, iterator, size_type)` method that can speed up `slist` merging when the programmer already knows the size. `slist` and `forward_list` are therefore complementary.

C++11 Conformance

Boost.Container aims for full C++11 conformance except reasoned deviations, backporting as much as possible for C++03. Obviously, this conformance is a work in progress so this section explains what C++11 features are implemented and which of them have been backported to C++03 compilers.

Move and Emplace

For compilers with rvalue references and for those C++03 types that use **Boost.Move** rvalue reference emulation **Boost.Container** supports all C++11 features related to move semantics: containers are movable, requirements for `value_type` are those specified for C++11 containers.

For compilers with variadic templates, **Boost.Container** supports placement insertion (`emplace, ...`) functions from C++11. For those compilers without variadic templates support **Boost.Container** uses the preprocessor to create a set of overloads up to a finite (10) number of parameters.

Stateful allocators

C++03 was not stateful-allocator friendly. For compactness of container objects and for simplicity, it did not require containers to support allocators with state: Allocator objects need not be stored in container objects. It was not possible to store an allocator with state, say an allocator that holds a pointer to an arena from which to allocate. C++03 allowed implementors to suppose two allocators of the same type always compare equal (that means that memory allocated by one allocator object could be deallocated by another instance of the same type) and allocators were not swapped when the container was swapped.

C++11 further improves stateful allocator support through `std::allocator_traits`. `std::allocator_traits` is the protocol between a container and an allocator, and an allocator writer can customize its behaviour (should the container propagate it in move constructor, swap, etc.?) following `allocator_traits` requirements. **Boost.Container** not only supports this model with C++11 but also **backports it to C++03**.

If possible, a single allocator is hold to construct `value_type`. If the container needs an auxiliary allocator (e.g. a array allocator used by `deque` or `stable_vector`), that allocator is also constructed from the user-supplied allocator when the container is constructed (i.e. it's not constructed on the fly when auxiliary memory is needed).

Scoped allocators

C++11 improves stateful allocators with the introduction of `std::scoped_allocator_adaptor` class template. `scoped_allocator_adaptor` is instantiated with one outer allocator and zero or more inner allocators.

A scoped allocator is a mechanism to automatically propagate the state of the allocator to the subobjects of a container in a controlled way. If instantiated with only one allocator type, the inner allocator becomes the `scoped_allocator_adaptor` itself, thus using the same allocator resource for the container and every element within the container and, if the elements themselves are containers, each of their elements recursively. If instantiated with more than one allocator, the first allocator is the outer allocator for use by the container, the second allocator is passed to the constructors of the container's elements, and, if the elements themselves are containers, the third allocator is passed to the elements' elements, and so on.

Boost.Container implements its own `scoped_allocator_adaptor` class and **backports this feature also to C++03 compilers**. Due to C++03 limitations, in those compilers the allocator propagation implemented by `scoped_allocator_adaptor::construct` functions will be based on traits (`constructible_with_allocator_suffix` and `constructible_with_allocator_prefix`) proposed in [N2554: The Scoped Allocator Model \(Rev 2\) proposal](#). In conforming C++11 compilers or compilers supporting SFINAE expressions (when `BOOST_NO_SFINAE_EXPR` is NOT defined), traits are ignored and C++11 rules (`is_constructible<T, Args..., inner_allocator_type>::value` and `is_constructible<T, allocator_arg_t, inner_allocator_type, Args...>::value`) will be used to detect if the allocator must be propagated with suffix or prefix allocator arguments.

Initializer lists

Boost.Container does not support initializer lists when constructing or assigning containers but it will support it for compilers with initialized-list support. This feature won't be backported to C++03 compilers.

`forward_list<T>`

Boost.Container does not offer C++11 `forward_list` container yet, but it will be available in future versions.

`vector<bool>`

`vector<bool>` specialization has been quite problematic, and there have been several unsuccessful tries to deprecate or remove it from the standard. **Boost.Container** does not implement it as there is a superior [Boost.DynamicBitset](#) solution. For issues with `vector<bool>` see papers [vector<bool>: N1211: More Problems, Better Solutions](#), [N2160: Library Issue 96: Fixing vector<bool>](#), [N2204 A Specification to deprecate vector<bool>](#).

- *“In 1998, admitting that the committee made a mistake was controversial. Since then Java has had to deprecate such significant portions of their libraries that the idea C++ would be ridiculed for deprecating a single minor template specialization seems quaint.”*
- *“`vector<bool>` is not a container and `vector<bool>::iterator` is not a random-access iterator (or even a forward or bidirectional iterator either, for that matter). This has already broken user code in the field in mysterious ways.”*
- *“`vector<bool>` forces a specific (and potentially bad) optimization choice on all users by enshrining it in the standard. The optimization is premature; different users have different requirements. This too has already hurt users who have been forced to implement workarounds to disable the 'optimization' (e.g., by using a `vector<char>` and manually casting to/from `bool`).”*

So `boost::container::vector<bool>::iterator` returns real `bool` references and works as a fully compliant container. If you need a memory optimized version of `boost::container::vector<bool>` functionalities, please use [Boost.DynamicBitset](#).

Other features

- Default constructors don't allocate memory which improves performance and usually implies a no-throw guarantee (if predicate's or allocator's default constructor doesn't throw).
- Small string optimization for `basic_string`, with an internal buffer of 11/23 bytes (32/64 bit systems) **without** increasing the usual `sizeof` of the string (3 words).
- `[multi]set/map` containers are size optimized embedding the color bit of the red-black tree nodes in the parent pointer.
- `[multi]set/map` containers use no recursive functions so stack problems are avoided.

History and reasons to use Boost.Container

Boost.Container history

Boost.Container is a product of a long development effort that started in 2004 with the experimental **Shmem** library, which pioneered the use of standard containers in shared memory. Shmem included modified SGI STL container code tweaked to support non-raw `allocator::pointer` types and stateful allocators. Once reviewed, Shmem was accepted as **Boost.Interprocess** and this library continued to refine and improve those containers.

In 2007, container code from node containers (`map`, `list`, `slist`) was rewritten, refactored and expanded to build the intrusive container library **Boost.Intrusive**. **Boost.Interprocess** containers were refactored to take advantage of **Boost.Intrusive** containers and code duplication was minimized. Both libraries continued to gain support and bug fixes for years. They introduced move semantics, emplacement insertion and more features of then unreleased C++0x standard.

Boost.Interprocess containers were always standard compliant, and those containers and new containers like `stable_vector` and `flat_[multi]set/map` were used outside **Boost.Interprocess** with success. As containers were mature enough to get their own library, it was a natural step to collect them containers and build **Boost.Container**, a library targeted to a wider audience.

Why Boost.Container?

With so many high quality standard library implementations out there, why would you want to use **Boost.Container**? There are several reasons for that:

- If you have a C++03 compiler, you can have access to C++11 features and have an easy code migration when you change your compiler.
- It's compatible with **Boost.Interprocess** shared memory allocators.
- You have extremely useful new containers like `stable_vector` and `flat_[multi]set/map`.
- If you work on multiple platforms, you'll have a portable behaviour without depending on the std-lib implementation conformance of each platform. Some examples:
 - Default constructors don't allocate memory at all, which improves performance and usually implies a no-throw guarantee (if predicate's or allocator's default constructor doesn't throw).
 - Small string optimization for `basic_string`.
- New extensions beyond the standard based on user feedback to improve code performance.

assign, 212, 222, 222, 222, 222, 222, 222, 222, 222, 222, 222, 223, 223
at, 212, 220, 220
basic_string, 212
begin, 212, 214, 217, 217
clear, 212, 225
end, 212, 217, 217
erase, 212, 224, 224, 224, 225
find, 212, 228, 228, 228, 228
get_stored_allocator, 212, 216, 216
insert, 212, 223, 223, 223, 223, 223, 223, 223, 223, 223, 224, 224, 224, 224
max_size, 212, 219, 225, 226, 226
push_back, 212, 222
rbegin, 212, 217, 217
rend, 212, 217, 218
replace, 212, 225, 225, 225, 225, 225, 226, 226, 226, 226, 226, 226, 226, 226, 227, 227, 227, 227
reserve, 212, 219
resize, 212, 219, 219
rfind, 212, 228, 228, 228, 229
shrink_to_fit, 212, 219
swap, 212, 227

Class template deque
assign, 90, 93, 93
at, 90, 97, 97
begin, 90, 93, 94
clear, 90, 100
deque, 90
deque_base, 90
emplace, 90, 98
emplace_back, 90, 98
emplace_front, 90, 97
end, 90, 94, 94, 98, 98, 99
erase, 90, 100, 100
front, 90, 96, 96
get_stored_allocator, 90, 93, 93
if, 100, 100
insert, 90, 98, 99, 99, 99
max_size, 90, 95
pop_front, 90, 99
push_back, 90, 98, 98
push_front, 90, 98, 98
rbegin, 90, 94, 94
rend, 90, 94, 94
resize, 90, 96, 96
shrink_to_fit, 90, 96
swap, 90, 100

Class template flat_map
at, 191, 197, 197
begin, 191, 194, 194
clear, 191, 200
emplace, 191, 197
emplace_hint, 191, 197
end, 191, 194, 194, 199, 200, 200, 201, 201
erase, 191, 199, 200, 200
find, 191, 200, 200
flat_map, 191
get_stored_allocator, 191, 194, 194
insert, 191, 198, 198, 198, 198, 199, 199, 199, 199
lower_bound, 191, 201, 201

max_size, 191, 196
rbegin, 191, 195, 195
rend, 191, 195, 195
reserve, 191, 196
shrink_to_fit, 191, 197
swap, 191, 200
upper_bound, 191, 201, 201

Class template flat_multimap
begin, 202, 205, 205
clear, 202, 210
emplace, 202, 208
emplace_hint, 202, 208
end, 202, 205, 205, 209, 210, 210, 211, 211
erase, 202, 209, 210, 210
find, 202, 210, 210
flat_multimap, 202
get_stored_allocator, 202, 205, 205
insert, 202, 208, 208, 208, 208, 209, 209, 209, 209
lower_bound, 202, 211, 211
max_size, 202, 207
rbegin, 202, 206, 206
rend, 202, 206, 206
reserve, 202, 207
shrink_to_fit, 202, 207
swap, 202, 210
upper_bound, 202, 211, 211

Class template flat_multiset
begin, 181, 184, 184
clear, 181, 188
emplace, 181, 186
emplace_hint, 181, 186
end, 181, 184, 184, 188, 189, 189, 189, 189
erase, 181, 188, 188, 188
find, 181, 189, 189
flat_multiset, 181
get_stored_allocator, 181, 183, 184
insert, 181, 187, 187, 187, 187, 187, 188
lower_bound, 181, 189, 189
max_size, 181, 186
rbegin, 181, 185, 185
rend, 181, 185, 185
reserve, 181, 186
shrink_to_fit, 181, 186
swap, 181, 188
upper_bound, 181, 189, 189

Class template flat_set
begin, 171, 174, 174
clear, 171, 179
emplace, 171, 176
emplace_hint, 171, 177
end, 171, 174, 174, 178, 179, 179, 180, 180
erase, 171, 178, 178, 178
find, 171, 179, 179
flat_set, 171
get_stored_allocator, 171, 173, 174
insert, 171, 177, 177, 177, 177, 178, 178
lower_bound, 171, 179, 180
max_size, 171, 176

rbegin, 171, 174, 175
rend, 171, 175, 175
reserve, 171, 176
shrink_to_fit, 171, 176
swap, 171, 179
upper_bound, 171, 180, 180

Class template list

assign, 101, 104, 104
begin, 101, 105, 105
clear, 101, 111
emplace, 101, 108
emplace_back, 101, 108
emplace_front, 101, 108
end, 101, 105, 105
erase, 101, 110, 110
front, 101, 107, 107
get_stored_allocator, 101, 104, 105
insert, 101, 109, 109, 109, 110
list, 101
max_size, 101, 107
merge, 101, 114, 114, 114, 114
pop_front, 101, 110
push_back, 101, 109, 109
push_front, 101, 108, 109
rbegin, 101, 105, 106
remove, 101, 113
remove_if, 101, 113
rend, 101, 106, 106
resize, 101, 107, 107
sort, 101, 115, 115
swap, 101, 110
unique, 101, 113, 113

Class template map

at, 151, 156, 157
begin, 151, 154, 154
clear, 151, 159
emplace, 151, 158
emplace_hint, 151, 159
end, 151, 154, 154, 159, 160, 160, 160, 160
erase, 151, 159, 159, 159
find, 151, 160, 160
get_stored_allocator, 151, 154, 154
insert, 151, 157, 157, 157, 157, 157, 157, 158, 158, 158, 158, 158
lower_bound, 151, 160, 160
map, 151
max_size, 151, 156
rbegin, 151, 155, 155
rend, 151, 155, 155
swap, 151, 159
upper_bound, 151, 160, 160

Class template multimap

begin, 161, 164, 164
clear, 161, 168
emplace, 161, 166
emplace_hint, 161, 166
end, 161, 164, 165, 168, 169, 169, 169, 169
erase, 161, 168, 168, 168
find, 161, 169, 169

- get_stored_allocator, 161, 164, 164
- insert, 161, 167, 167, 167, 167, 167, 167, 167, 168, 168
- lower_bound, 161, 169, 169
- max_size, 161, 166
- multimap, 161
- rbegin, 161, 165, 165
- rend, 161, 165, 165
- swap, 161, 168
- upper_bound, 161, 169, 169

Class template multiset

- begin, 142, 145, 145
- clear, 142, 148
- emplace, 142, 147
- emplace_hint, 142, 147
- end, 142, 145, 145, 148, 149, 149, 149, 149
- erase, 142, 148, 148, 148
- find, 142, 149, 149
- get_stored_allocator, 142, 144, 145
- insert, 142, 147, 147, 147, 148, 148
- lower_bound, 142, 149, 149
- max_size, 142, 147
- multiset, 142
- rbegin, 142, 145, 145
- rend, 142, 146, 146
- swap, 142, 148
- upper_bound, 142, 149, 149

Class template scoped_allocator_adaptor

- allocate, 242, 245, 245
- construct, 242, 245, 246, 246, 246, 246, 246, 246, 246, 246
- const_pointer, 242
- const_void_pointer, 242
- deallocate, 242, 245
- destroy, 242, 245
- difference_type, 242
- inner_allocator, 242, 245, 245
- inner_allocator_type, 242, 243
- max_size, 242, 245
- other, 242
- outer_allocator, 242, 243, 243, 245, 245
- outer_allocator_type, 242
- outer_traits_type, 242, 243
- pointer, 242
- propagate_on_container_copy_assignment, 242, 243
- propagate_on_container_move_assignment, 242, 244
- propagate_on_container_swap, 242, 244
- rebind, 242
- select_on_container_copy_construction, 242, 245
- size_type, 242
- value_type, 242
- void_pointer, 242

Class template set

- begin, 133, 136, 136
- clear, 133, 140
- emplace, 133, 138
- emplace_hint, 133, 138
- end, 133, 136, 136, 139, 140, 140, 141, 141
- erase, 133, 139, 139, 139
- find, 133, 140, 140

- get_stored_allocator, 133, 135, 136
- insert, 133, 138, 138, 139, 139, 139
- lower_bound, 133, 140, 141
- max_size, 133, 138
- rbegin, 133, 136, 136
- rend, 133, 137, 137
- set, 133
- swap, 133, 140
- upper_bound, 133, 141, 141

Class template slist

- assign, 116, 119, 120
- begin, 116, 120, 120, 120, 121, 121
- clear, 116, 125
- emplace, 116, 130
- emplace_after, 116, 123
- emplace_front, 116, 123
- end, 116, 121, 121, 125, 125
- erase, 116, 131, 131
- erase_after, 116, 125, 125
- front, 116, 123, 123
- get_stored_allocator, 116, 120, 120
- insert, 116, 130, 130, 130, 131
- insert_after, 116, 124, 124, 124, 124
- max_size, 116, 122
- merge, 116, 128, 128, 129, 129
- pop_front, 116, 125
- previous, 116, 121, 122
- push_front, 116, 123, 123
- remove, 116, 127
- remove_if, 116, 128
- resize, 116, 122, 122
- slist, 116
- sort, 116, 129, 129
- swap, 116, 125
- unique, 116, 128, 128

Class template stable_vector

- assign, 79, 82, 82
- at, 79, 87, 87
- begin, 79, 83, 83
- clear, 79, 89
- emplace, 79, 87
- emplace_back, 79, 87
- end, 79, 80, 83, 83, 87, 88, 88
- erase, 79, 89, 89
- front, 79, 86, 86
- get_stored_allocator, 79, 82, 83
- insert, 79, 88, 88, 88, 88
- max_size, 79, 85
- push_back, 79, 87, 88
- rbegin, 79, 83, 84
- rend, 79, 84, 84
- reserve, 79, 85
- resize, 79, 85, 85
- shrink_to_fit, 79, 86
- stable_vector, 79
- swap, 79, 89

Class template vector

- assign, 68, 71, 71

- at, 68, 75, 76
- begin, 68, 72, 72
- clear, 68, 78
- emplace, 68, 76
- emplace_back, 68, 76
- end, 68, 72, 72, 76, 77, 77
- erase, 68, 78, 78
- front, 68, 74, 75
- get_stored_allocator, 68, 71, 71
- insert, 68, 77, 77, 77, 77
- max_size, 68, 74
- push_back, 68, 76, 77
- rbegin, 68, 72, 72
- rend, 68, 72, 73
- reserve, 68, 74
- resize, 68, 74, 74
- shrink_to_fit, 68, 74
- swap, 68, 78
- vector, 68

clear

- Class template basic_string, 212, 225
- Class template deque, 90, 100
- Class template flat_map, 191, 200
- Class template flat_multimap, 202, 210
- Class template flat_multiset, 181, 188
- Class template flat_set, 171, 179
- Class template list, 101, 111
- Class template map, 151, 159
- Class template multimap, 161, 168
- Class template multiset, 142, 148
- Class template set, 133, 140
- Class template slist, 116, 125
- Class template stable_vector, 79, 89
- Class template vector, 68, 78

construct

- Class template scoped_allocator_adaptor, 242, 245, 246, 246, 246, 246, 246, 246, 246, 246
- Struct template allocator_traits, 64, 66

constructible_with_allocator_prefix

- Struct template constructible_with_allocator_prefix, 240, 240

constructible_with_allocator_suffix

- Struct template constructible_with_allocator_suffix, 239, 239

const_pointer

- Class template scoped_allocator_adaptor, 242
- Struct template allocator_traits, 64, 65

const_reference

- Struct template allocator_traits, 64, 65

const_void_pointer

- Class template scoped_allocator_adaptor, 242
- Struct template allocator_traits, 64, 65

D

deallocate

- Class template scoped_allocator_adaptor, 242, 245
- Struct template allocator_traits, 64, 66

deque

- Class template deque, 90

deque_base

Class template deque, 90

destroy

Class template scoped_allocator_adaptor, 242, 245

Struct template allocator_traits, 64, 66

difference_type

Class template scoped_allocator_adaptor, 242

Struct template allocator_traits, 64, 65

E

emplace

Class template deque, 90, 98

Class template flat_map, 191, 197

Class template flat_multimap, 202, 208

Class template flat_multiset, 181, 186

Class template flat_set, 171, 176

Class template list, 101, 108

Class template map, 151, 158

Class template multimap, 161, 166

Class template multiset, 142, 147

Class template set, 133, 138

Class template slist, 116, 130

Class template stable_vector, 79, 87

Class template vector, 68, 76

emplace_after

Class template slist, 116, 123

emplace_back

Class template deque, 90, 98

Class template list, 101, 108

Class template stable_vector, 79, 87

Class template vector, 68, 76

emplace_front

Class template deque, 90, 97

Class template list, 101, 108

Class template slist, 116, 123

emplace_hint

Class template flat_map, 191, 197

Class template flat_multimap, 202, 208

Class template flat_multiset, 181, 186

Class template flat_set, 171, 177

Class template map, 151, 159

Class template multimap, 161, 166

Class template multiset, 142, 147

Class template set, 133, 138

end

Class template basic_string, 212, 217, 217

Class template deque, 90, 94, 94, 98, 98, 99

Class template flat_map, 191, 194, 194, 199, 200, 200, 201, 201

Class template flat_multimap, 202, 205, 205, 209, 210, 210, 211, 211

Class template flat_multiset, 181, 184, 184, 188, 189, 189, 189, 189

Class template flat_set, 171, 174, 174, 178, 179, 179, 180, 180

Class template list, 101, 105, 105

Class template map, 151, 154, 154, 159, 160, 160, 160, 160

Class template multimap, 161, 164, 165, 168, 169, 169, 169, 169

Class template multiset, 142, 145, 145, 148, 149, 149, 149, 149

Class template set, 133, 136, 136, 139, 140, 140, 141, 141

Class template slist, 116, 121, 121, 125, 125

Class template stable_vector, 79, 80, 83, 83, 87, 88, 88

Class template vector, 68, 72, 72, 76, 77, 77
stable_vector, 10

erase

Class template basic_string, 212, 224, 224, 224, 225
Class template deque, 90, 100, 100
Class template flat_map, 191, 199, 200, 200
Class template flat_multimap, 202, 209, 210, 210
Class template flat_multiset, 181, 188, 188, 188
Class template flat_set, 171, 178, 178, 178
Class template list, 101, 110, 110
Class template map, 151, 159, 159, 159
Class template multimap, 161, 168, 168, 168
Class template multiset, 142, 148, 148, 148
Class template set, 133, 139, 139, 139
Class template slist, 116, 131, 131
Class template stable_vector, 79, 89, 89
Class template vector, 68, 78, 78
flat_(multi)map/set associative containers, 11

erase_after

Class template slist, 116, 125, 125

F**find**

Class template basic_string, 212, 228, 228, 228, 228
Class template flat_map, 191, 200, 200
Class template flat_multimap, 202, 210, 210
Class template flat_multiset, 181, 189, 189
Class template flat_set, 171, 179, 179
Class template map, 151, 160, 160
Class template multimap, 161, 169, 169
Class template multiset, 142, 149, 149
Class template set, 133, 140, 140

flat_(multi)map/set associative containers

erase, 11

flat_map

Class template flat_map, 191

flat_multimap

Class template flat_multimap, 202

flat_multiset

Class template flat_multiset, 181

flat_set

Class template flat_set, 171

front

Class template deque, 90, 96, 96
Class template list, 101, 107, 107
Class template slist, 116, 123, 123
Class template stable_vector, 79, 86, 86
Class template vector, 68, 74, 75

G**getline**

Header < boost/container/string.hpp >, 250

get_stored_allocator

Class template basic_string, 212, 216, 216
Class template deque, 90, 93, 93
Class template flat_map, 191, 194, 194
Class template flat_multimap, 202, 205, 205

Class template flat_multiset, 181, 183, 184
Class template flat_set, 171, 173, 174
Class template list, 101, 104, 105
Class template map, 151, 154, 154
Class template multimap, 161, 164, 164
Class template multiset, 142, 144, 145
Class template set, 133, 135, 136
Class template slist, 116, 120, 120
Class template stable_vector, 79, 82, 83
Class template vector, 68, 71, 71

H

hash_value

Header < boost/container/string.hpp >, 250
Header < boost/container/deque.hpp >
swap, 234
Header < boost/container/flat_map.hpp >
swap, 235
Header < boost/container/flat_set.hpp >
swap, 236
Header < boost/container/list.hpp >
swap, 237
Header < boost/container/map.hpp >
swap, 238
Header < boost/container/set.hpp >
swap, 248
Header < boost/container/slist.hpp >
swap, 249
Header < boost/container/stable_vector.hpp >
swap, 249
Header < boost/container/string.hpp >
getline, 250
hash_value, 250
string, 250
swap, 250
wstring, 250
Header < boost/container/vector.hpp >
swap, 252

I

if
Class template deque, 100, 100
inner_allocator
Class template scoped_allocator_adaptor, 242, 245, 245
inner_allocator_type
Class template scoped_allocator_adaptor, 242, 243
insert
Class template basic_string, 212, 223, 223, 223, 223, 223, 223, 223, 223, 223, 224, 224, 224, 224
Class template deque, 90, 98, 99, 99, 99
Class template flat_map, 191, 198, 198, 198, 198, 199, 199, 199, 199
Class template flat_multimap, 202, 208, 208, 208, 208, 209, 209, 209, 209
Class template flat_multiset, 181, 187, 187, 187, 187, 187, 188
Class template flat_set, 171, 177, 177, 177, 177, 178, 178
Class template list, 101, 109, 109, 109, 110
Class template map, 151, 157, 157, 157, 157, 157, 157, 158, 158, 158, 158, 158
Class template multimap, 161, 167, 167, 167, 167, 167, 167, 167, 168, 168
Class template multiset, 142, 147, 147, 147, 148, 148

Class template set, 133, 138, 138, 139, 139, 139
Class template slist, 116, 130, 130, 130, 131
Class template stable_vector, 79, 88, 88, 88, 88
Class template vector, 68, 77, 77, 77, 77

insert_after

Class template slist, 116, 124, 124, 124, 124

iterator

vector < bool >, 15

L**list**

Class template list, 101

lower_bound

Class template flat_map, 191, 201, 201
Class template flat_multimap, 202, 211, 211
Class template flat_multiset, 181, 189, 189
Class template flat_set, 171, 179, 180
Class template map, 151, 160, 160
Class template multimap, 161, 169, 169
Class template multiset, 142, 149, 149
Class template set, 133, 140, 141

M**map**

Class template map, 151

max_size

Class template basic_string, 212, 219, 225, 226, 226
Class template deque, 90, 95
Class template flat_map, 191, 196
Class template flat_multimap, 202, 207
Class template flat_multiset, 181, 186
Class template flat_set, 171, 176
Class template list, 101, 107
Class template map, 151, 156
Class template multimap, 161, 166
Class template multiset, 142, 147
Class template scoped_allocator_adaptor, 242, 245
Class template set, 133, 138
Class template slist, 116, 122
Class template stable_vector, 79, 85
Class template vector, 68, 74
Struct template allocator_traits, 64, 66

merge

Class template list, 101, 114, 114, 114, 114
Class template slist, 116, 128, 128, 129, 129

multimap

Class template multimap, 161

multiset

Class template multiset, 142

O**ordered_range_t**

Struct ordered_range_t, 232
Struct ordered_unique_range_t, 233

ordered_unique_range_t

Struct ordered_unique_range_t, 233

other

- Class template `scoped_allocator_adaptor`, 242
- Struct template `rebind`, 247
- `outer_allocator`
 - Class template `scoped_allocator_adaptor`, 242, 243, 243, 245, 245
- `outer_allocator_type`
 - Class template `scoped_allocator_adaptor`, 242
- `outer_traits_type`
 - Class template `scoped_allocator_adaptor`, 242, 243

P

- `pointer`
 - Class template `scoped_allocator_adaptor`, 242
 - Struct template `allocator_traits`, 64, 65
- `pop_front`
 - Class template `deque`, 90, 99
 - Class template `list`, 101, 110
 - Class template `slist`, 116, 125
- `portable_rebind_alloc`
 - Struct template `allocator_traits`, 64
 - Struct template `portable_rebind_alloc`, 66
- `previous`
 - Class template `slist`, 116, 121, 122
- `propagate_on_container_copy_assignment`
 - Class template `scoped_allocator_adaptor`, 242, 243
 - Struct template `allocator_traits`, 64, 65
- `propagate_on_container_move_assignment`
 - Class template `scoped_allocator_adaptor`, 242, 244
 - Struct template `allocator_traits`, 64, 65
- `propagate_on_container_swap`
 - Class template `scoped_allocator_adaptor`, 242, 244
 - Struct template `allocator_traits`, 64, 65
- `push_back`
 - Class template `basic_string`, 212, 222
 - Class template `deque`, 90, 98, 98
 - Class template `list`, 101, 109, 109
 - Class template `stable_vector`, 79, 87, 88
 - Class template `vector`, 68, 76, 77
- `push_front`
 - Class template `deque`, 90, 98, 98
 - Class template `list`, 101, 108, 109
 - Class template `slist`, 116, 123, 123

R

- `rbegin`
 - Class template `basic_string`, 212, 217, 217
 - Class template `deque`, 90, 94, 94
 - Class template `flat_map`, 191, 195, 195
 - Class template `flat_multimap`, 202, 206, 206
 - Class template `flat_multiset`, 181, 185, 185
 - Class template `flat_set`, 171, 174, 175
 - Class template `list`, 101, 105, 106
 - Class template `map`, 151, 155, 155
 - Class template `multimap`, 161, 165, 165
 - Class template `multiset`, 142, 145, 145
 - Class template `set`, 133, 136, 136
 - Class template `stable_vector`, 79, 83, 84
 - Class template `vector`, 68, 72, 72

rebind

- Class template `scoped_allocator_adaptor`, 242
- Struct template `rebind`, 247

reference

- Struct template `allocator_traits`, 64, 65

remove

- Class template `list`, 101, 113
- Class template `slist`, 116, 127

remove_if

- Class template `list`, 101, 113
- Class template `slist`, 116, 128

rend

- Class template `basic_string`, 212, 217, 218
- Class template `deque`, 90, 94, 94
- Class template `flat_map`, 191, 195, 195
- Class template `flat_multimap`, 202, 206, 206
- Class template `flat_multiset`, 181, 185, 185
- Class template `flat_set`, 171, 175, 175
- Class template `list`, 101, 106, 106
- Class template `map`, 151, 155, 155
- Class template `multimap`, 161, 165, 165
- Class template `multiset`, 142, 146, 146
- Class template `set`, 133, 137, 137
- Class template `stable_vector`, 79, 84, 84
- Class template `vector`, 68, 72, 73

replace

- Class template `basic_string`, 212, 225, 225, 225, 225, 225, 226, 226, 226, 226, 226, 226, 226, 226, 226, 226, 226, 226, 227, 227, 227, 227

reserve

- Class template `basic_string`, 212, 219
- Class template `flat_map`, 191, 196
- Class template `flat_multimap`, 202, 207
- Class template `flat_multiset`, 181, 186
- Class template `flat_set`, 171, 176
- Class template `stable_vector`, 79, 85
- Class template `vector`, 68, 74

resize

- Class template `basic_string`, 212, 219, 219
- Class template `deque`, 90, 96, 96
- Class template `list`, 101, 107, 107
- Class template `slist`, 116, 122, 122
- Class template `stable_vector`, 79, 85, 85
- Class template `vector`, 68, 74, 74

rfind

- Class template `basic_string`, 212, 228, 228, 228, 229

S

select_on_container_copy_construction

- Class template `scoped_allocator_adaptor`, 242, 245
- Struct template `allocator_traits`, 64, 66

set

- Class template `set`, 133

shrink_to_fit

- Class template `basic_string`, 212, 219
- Class template `deque`, 90, 96
- Class template `flat_map`, 191, 197
- Class template `flat_multimap`, 202, 207
- Class template `flat_multiset`, 181, 186

- Class template flat_set, 171, 176
- Class template stable_vector, 79, 86
- Class template vector, 68, 74
- size_type
 - Class template scoped_allocator_adaptor, 242
 - Struct template allocator_traits, 64, 65
- slist
 - Class template slist, 116
- sort
 - Class template list, 101, 115, 115
 - Class template slist, 116, 129, 129
- stable_vector
 - Class template stable_vector, 79
 - end, 10
- string
 - Header < boost/container/string.hpp >, 250
 - Type definition string, 251
- Struct allocator_arg_t
 - allocator_arg_t, 247
- Struct ordered_range_t
 - ordered_range_t, 232
- Struct ordered_unique_range_t
 - ordered_range_t, 233
 - ordered_unique_range_t, 233
- Struct template allocator_traits
 - allocate, 64, 66, 66
 - allocator_traits, 64
 - allocator_type, 64
 - construct, 64, 66
 - const_pointer, 64, 65
 - const_reference, 64, 65
 - const_void_pointer, 64, 65
 - deallocate, 64, 66
 - destroy, 64, 66
 - difference_type, 64, 65
 - max_size, 64, 66
 - pointer, 64, 65
 - portable_rebind_alloc, 64
 - propagate_on_container_copy_assignment, 64, 65
 - propagate_on_container_move_assignment, 64, 65
 - propagate_on_container_swap, 64, 65
 - reference, 64, 65
 - select_on_container_copy_construction, 64, 66
 - size_type, 64, 65
 - type, 64
 - value_type, 64
 - void_pointer, 64, 65
- Struct template constructible_with_allocator_prefix
 - allocator_type, 240
 - constructible_with_allocator_prefix, 240, 240
- Struct template constructible_with_allocator_suffix
 - allocator_type, 239
 - constructible_with_allocator_suffix, 239, 239
- Struct template portable_rebind_alloc
 - portable_rebind_alloc, 66
 - type, 66
- Struct template rebind
 - other, 247

rebind, 247

Struct template uses_allocator

uses_allocator, 241

swap

Class template basic_string, 212, 227

Class template deque, 90, 100

Class template flat_map, 191, 200

Class template flat_multimap, 202, 210

Class template flat_multiset, 181, 188

Class template flat_set, 171, 179

Class template list, 101, 110

Class template map, 151, 159

Class template multimap, 161, 168

Class template multiset, 142, 148

Class template set, 133, 140

Class template slist, 116, 125

Class template stable_vector, 79, 89

Class template vector, 68, 78

Header < boost/container/deque.hpp >, 234

Header < boost/container/flat_map.hpp >, 235

Header < boost/container/flat_set.hpp >, 236

Header < boost/container/list.hpp >, 237

Header < boost/container/map.hpp >, 238

Header < boost/container/set.hpp >, 248

Header < boost/container/slist.hpp >, 249

Header < boost/container/stable_vector.hpp >, 249

Header < boost/container/string.hpp >, 250

Header < boost/container/vector.hpp >, 252

T

type

Struct template allocator_traits, 64

Struct template portable_rebind_alloc, 66

Type definition string

string, 251

Type definition wstring

wstring, 252

U

unique

Class template list, 101, 113, 113

Class template slist, 116, 128, 128

upper_bound

Class template flat_map, 191, 201, 201

Class template flat_multimap, 202, 211, 211

Class template flat_multiset, 181, 189, 189

Class template flat_set, 171, 180, 180

Class template map, 151, 160, 160

Class template multimap, 161, 169, 169

Class template multiset, 142, 149, 149

Class template set, 133, 141, 141

uses_allocator

Struct template uses_allocator, 241

V

value_type

Class template scoped_allocator_adaptor, 242

- Struct template allocator_traits, 64
- vector
 - Class template vector, 68
- vector < bool >
 - iterator, 15
- void_pointer
 - Class template scoped_allocator_adaptor, 242
 - Struct template allocator_traits, 64, 65

W

- wstring
 - Header < boost/container/string.hpp >, 250
 - Type definition wstring, 252

Typedef Index

A

- allocate
 - Class template scoped_allocator_adaptor, 242, 245, 245
 - Struct template allocator_traits, 64, 66, 66
- allocator_arg_t
 - Struct allocator_arg_t, 247
- allocator_traits
 - Struct template allocator_traits, 64
- allocator_type
 - Struct template allocator_traits, 64
 - Struct template constructible_with_allocator_prefix, 240
 - Struct template constructible_with_allocator_suffix, 239
- append
 - Class template basic_string, 212, 220, 220, 221, 221, 221, 221, 221, 221, 221, 221, 221, 221, 221, 221
- assign
 - Class template basic_string, 212, 222, 222, 222, 222, 222, 222, 222, 222, 222, 222, 223, 223
 - Class template deque, 90, 93, 93
 - Class template list, 101, 104, 104
 - Class template slist, 116, 119, 120
 - Class template stable_vector, 79, 82, 82
 - Class template vector, 68, 71, 71
- at
 - Class template basic_string, 212, 220, 220
 - Class template deque, 90, 97, 97
 - Class template flat_map, 191, 197, 197
 - Class template map, 151, 156, 157
 - Class template stable_vector, 79, 87, 87
 - Class template vector, 68, 75, 76

B

- basic_string
 - Class template basic_string, 212
- begin
 - Class template basic_string, 212, 214, 217, 217
 - Class template deque, 90, 93, 94
 - Class template flat_map, 191, 194, 194
 - Class template flat_multimap, 202, 205, 205
 - Class template flat_multiset, 181, 184, 184
 - Class template flat_set, 171, 174, 174
 - Class template list, 101, 105, 105

Class template map, 151, 154, 154
Class template multimap, 161, 164, 164
Class template multiset, 142, 145, 145
Class template set, 133, 136, 136
Class template slist, 116, 120, 120, 120, 121, 121
Class template stable_vector, 79, 83, 83
Class template vector, 68, 72, 72

C

Class template basic_string

append, 212, 220, 220, 221, 221, 221, 221, 221, 221, 221, 221, 221, 221, 221, 221, 221
assign, 212, 222, 222, 222, 222, 222, 222, 222, 222, 222, 222, 223, 223
at, 212, 220, 220
basic_string, 212
begin, 212, 214, 217, 217
clear, 212, 225
end, 212, 217, 217
erase, 212, 224, 224, 224, 225
find, 212, 228, 228, 228, 228
get_stored_allocator, 212, 216, 216
insert, 212, 223, 223, 223, 223, 223, 223, 223, 223, 223, 224, 224, 224, 224
max_size, 212, 219, 225, 226, 226
push_back, 212, 222
rbegin, 212, 217, 217
rend, 212, 217, 218
replace, 212, 225, 225, 225, 225, 225, 226, 226, 226, 226, 226, 226, 226, 226, 226, 227, 227, 227, 227
reserve, 212, 219
resize, 212, 219, 219
rfind, 212, 228, 228, 228, 229
shrink_to_fit, 212, 219
swap, 212, 227

Class template deque

assign, 90, 93, 93
at, 90, 97, 97
begin, 90, 93, 94
clear, 90, 100
deque, 90
deque_base, 90
emplace, 90, 98
emplace_back, 90, 98
emplace_front, 90, 97
end, 90, 94, 94, 98, 98, 99
erase, 90, 100, 100
front, 90, 96, 96
get_stored_allocator, 90, 93, 93
if, 100, 100
insert, 90, 98, 99, 99, 99
max_size, 90, 95
pop_front, 90, 99
push_back, 90, 98, 98
push_front, 90, 98, 98
rbegin, 90, 94, 94
rend, 90, 94, 94
resize, 90, 96, 96
shrink_to_fit, 90, 96
swap, 90, 100

Class template flat_map

at, 191, 197, 197
begin, 191, 194, 194
clear, 191, 200
emplace, 191, 197
emplace_hint, 191, 197
end, 191, 194, 194, 199, 200, 200, 201, 201
erase, 191, 199, 200, 200
find, 191, 200, 200
flat_map, 191
get_stored_allocator, 191, 194, 194
insert, 191, 198, 198, 198, 198, 199, 199, 199, 199
lower_bound, 191, 201, 201
max_size, 191, 196
rbegin, 191, 195, 195
rend, 191, 195, 195
reserve, 191, 196
shrink_to_fit, 191, 197
swap, 191, 200
upper_bound, 191, 201, 201

Class template flat_multimap
begin, 202, 205, 205
clear, 202, 210
emplace, 202, 208
emplace_hint, 202, 208
end, 202, 205, 205, 209, 210, 210, 211, 211
erase, 202, 209, 210, 210
find, 202, 210, 210
flat_multimap, 202
get_stored_allocator, 202, 205, 205
insert, 202, 208, 208, 208, 208, 209, 209, 209, 209
lower_bound, 202, 211, 211
max_size, 202, 207
rbegin, 202, 206, 206
rend, 202, 206, 206
reserve, 202, 207
shrink_to_fit, 202, 207
swap, 202, 210
upper_bound, 202, 211, 211

Class template flat_multiset
begin, 181, 184, 184
clear, 181, 188
emplace, 181, 186
emplace_hint, 181, 186
end, 181, 184, 184, 188, 189, 189, 189, 189
erase, 181, 188, 188, 188
find, 181, 189, 189
flat_multiset, 181
get_stored_allocator, 181, 183, 184
insert, 181, 187, 187, 187, 187, 187, 188
lower_bound, 181, 189, 189
max_size, 181, 186
rbegin, 181, 185, 185
rend, 181, 185, 185
reserve, 181, 186
shrink_to_fit, 181, 186
swap, 181, 188
upper_bound, 181, 189, 189

Class template flat_set

begin, 171, 174, 174
clear, 171, 179
emplace, 171, 176
emplace_hint, 171, 177
end, 171, 174, 174, 178, 179, 179, 180, 180
erase, 171, 178, 178, 178
find, 171, 179, 179
flat_set, 171
get_stored_allocator, 171, 173, 174
insert, 171, 177, 177, 177, 177, 178, 178
lower_bound, 171, 179, 180
max_size, 171, 176
rbegin, 171, 174, 175
rend, 171, 175, 175
reserve, 171, 176
shrink_to_fit, 171, 176
swap, 171, 179
upper_bound, 171, 180, 180

Class template list

assign, 101, 104, 104
begin, 101, 105, 105
clear, 101, 111
emplace, 101, 108
emplace_back, 101, 108
emplace_front, 101, 108
end, 101, 105, 105
erase, 101, 110, 110
front, 101, 107, 107
get_stored_allocator, 101, 104, 105
insert, 101, 109, 109, 109, 110
list, 101
max_size, 101, 107
merge, 101, 114, 114, 114, 114
pop_front, 101, 110
push_back, 101, 109, 109
push_front, 101, 108, 109
rbegin, 101, 105, 106
remove, 101, 113
remove_if, 101, 113
rend, 101, 106, 106
resize, 101, 107, 107
sort, 101, 115, 115
swap, 101, 110
unique, 101, 113, 113

Class template map

at, 151, 156, 157
begin, 151, 154, 154
clear, 151, 159
emplace, 151, 158
emplace_hint, 151, 159
end, 151, 154, 154, 159, 160, 160, 160, 160
erase, 151, 159, 159, 159
find, 151, 160, 160
get_stored_allocator, 151, 154, 154
insert, 151, 157, 157, 157, 157, 157, 157, 158, 158, 158, 158
lower_bound, 151, 160, 160
map, 151
max_size, 151, 156

- rbegin, 151, 155, 155
- rend, 151, 155, 155
- swap, 151, 159
- upper_bound, 151, 160, 160
- Class template multimap
 - begin, 161, 164, 164
 - clear, 161, 168
 - emplace, 161, 166
 - emplace_hint, 161, 166
 - end, 161, 164, 165, 168, 169, 169, 169, 169
 - erase, 161, 168, 168, 168
 - find, 161, 169, 169
 - get_stored_allocator, 161, 164, 164
 - insert, 161, 167, 167, 167, 167, 167, 167, 167, 168, 168
 - lower_bound, 161, 169, 169
 - max_size, 161, 166
 - multimap, 161
 - rbegin, 161, 165, 165
 - rend, 161, 165, 165
 - swap, 161, 168
 - upper_bound, 161, 169, 169
- Class template multiset
 - begin, 142, 145, 145
 - clear, 142, 148
 - emplace, 142, 147
 - emplace_hint, 142, 147
 - end, 142, 145, 145, 148, 149, 149, 149, 149
 - erase, 142, 148, 148, 148
 - find, 142, 149, 149
 - get_stored_allocator, 142, 144, 145
 - insert, 142, 147, 147, 147, 148, 148
 - lower_bound, 142, 149, 149
 - max_size, 142, 147
 - multiset, 142
 - rbegin, 142, 145, 145
 - rend, 142, 146, 146
 - swap, 142, 148
 - upper_bound, 142, 149, 149
- Class template scoped_allocator_adaptor
 - allocate, 242, 245, 245
 - construct, 242, 245, 246, 246, 246, 246, 246, 246, 246, 246
 - const_pointer, 242
 - const_void_pointer, 242
 - deallocate, 242, 245
 - destroy, 242, 245
 - difference_type, 242
 - inner_allocator, 242, 245, 245
 - inner_allocator_type, 242, 243
 - max_size, 242, 245
 - other, 242
 - outer_allocator, 242, 243, 243, 245, 245
 - outer_allocator_type, 242
 - outer_traits_type, 242, 243
 - pointer, 242
 - propagate_on_container_copy_assignment, 242, 243
 - propagate_on_container_move_assignment, 242, 244
 - propagate_on_container_swap, 242, 244
 - rebind, 242

- select_on_container_copy_construction, 242, 245
- size_type, 242
- value_type, 242
- void_pointer, 242
- Class template set
 - begin, 133, 136, 136
 - clear, 133, 140
 - emplace, 133, 138
 - emplace_hint, 133, 138
 - end, 133, 136, 136, 139, 140, 140, 141, 141
 - erase, 133, 139, 139, 139
 - find, 133, 140, 140
 - get_stored_allocator, 133, 135, 136
 - insert, 133, 138, 138, 139, 139, 139
 - lower_bound, 133, 140, 141
 - max_size, 133, 138
 - rbegin, 133, 136, 136
 - rend, 133, 137, 137
 - set, 133
 - swap, 133, 140
 - upper_bound, 133, 141, 141
- Class template slist
 - assign, 116, 119, 120
 - begin, 116, 120, 120, 120, 121, 121
 - clear, 116, 125
 - emplace, 116, 130
 - emplace_after, 116, 123
 - emplace_front, 116, 123
 - end, 116, 121, 121, 125, 125
 - erase, 116, 131, 131
 - erase_after, 116, 125, 125
 - front, 116, 123, 123
 - get_stored_allocator, 116, 120, 120
 - insert, 116, 130, 130, 130, 131
 - insert_after, 116, 124, 124, 124, 124
 - max_size, 116, 122
 - merge, 116, 128, 128, 129, 129
 - pop_front, 116, 125
 - previous, 116, 121, 122
 - push_front, 116, 123, 123
 - remove, 116, 127
 - remove_if, 116, 128
 - resize, 116, 122, 122
 - slist, 116
 - sort, 116, 129, 129
 - swap, 116, 125
 - unique, 116, 128, 128
- Class template stable_vector
 - assign, 79, 82, 82
 - at, 79, 87, 87
 - begin, 79, 83, 83
 - clear, 79, 89
 - emplace, 79, 87
 - emplace_back, 79, 87
 - end, 79, 80, 83, 83, 87, 88, 88
 - erase, 79, 89, 89
 - front, 79, 86, 86
 - get_stored_allocator, 79, 82, 83

- insert, 79, 88, 88, 88, 88
- max_size, 79, 85
- push_back, 79, 87, 88
- rbegin, 79, 83, 84
- rend, 79, 84, 84
- reserve, 79, 85
- resize, 79, 85, 85
- shrink_to_fit, 79, 86
- stable_vector, 79
- swap, 79, 89

Class template vector

- assign, 68, 71, 71
- at, 68, 75, 76
- begin, 68, 72, 72
- clear, 68, 78
- emplace, 68, 76
- emplace_back, 68, 76
- end, 68, 72, 72, 76, 77, 77
- erase, 68, 78, 78
- front, 68, 74, 75
- get_stored_allocator, 68, 71, 71
- insert, 68, 77, 77, 77, 77
- max_size, 68, 74
- push_back, 68, 76, 77
- rbegin, 68, 72, 72
- rend, 68, 72, 73
- reserve, 68, 74
- resize, 68, 74, 74
- shrink_to_fit, 68, 74
- swap, 68, 78
- vector, 68

clear

- Class template basic_string, 212, 225
- Class template deque, 90, 100
- Class template flat_map, 191, 200
- Class template flat_multimap, 202, 210
- Class template flat_multiset, 181, 188
- Class template flat_set, 171, 179
- Class template list, 101, 111
- Class template map, 151, 159
- Class template multimap, 161, 168
- Class template multiset, 142, 148
- Class template set, 133, 140
- Class template slist, 116, 125
- Class template stable_vector, 79, 89
- Class template vector, 68, 78

construct

- Class template scoped_allocator_adaptor, 242, 245, 246, 246, 246, 246, 246, 246, 246
- Struct template allocator_traits, 64, 66

constructible_with_allocator_prefix

- Struct template constructible_with_allocator_prefix, 240, 240

constructible_with_allocator_suffix

- Struct template constructible_with_allocator_suffix, 239, 239

const_pointer

- Class template scoped_allocator_adaptor, 242
- Struct template allocator_traits, 64, 65

const_reference

- Struct template allocator_traits, 64, 65

const_void_pointer

Class template scoped_allocator_adaptor, 242

Struct template allocator_traits, 64, 65

D

deallocate

Class template scoped_allocator_adaptor, 242, 245

Struct template allocator_traits, 64, 66

deque

Class template deque, 90

deque_base

Class template deque, 90

destroy

Class template scoped_allocator_adaptor, 242, 245

Struct template allocator_traits, 64, 66

difference_type

Class template scoped_allocator_adaptor, 242

Struct template allocator_traits, 64, 65

E

emplace

Class template deque, 90, 98

Class template flat_map, 191, 197

Class template flat_multimap, 202, 208

Class template flat_multiset, 181, 186

Class template flat_set, 171, 176

Class template list, 101, 108

Class template map, 151, 158

Class template multimap, 161, 166

Class template multiset, 142, 147

Class template set, 133, 138

Class template slist, 116, 130

Class template stable_vector, 79, 87

Class template vector, 68, 76

emplace_after

Class template slist, 116, 123

emplace_back

Class template deque, 90, 98

Class template list, 101, 108

Class template stable_vector, 79, 87

Class template vector, 68, 76

emplace_front

Class template deque, 90, 97

Class template list, 101, 108

Class template slist, 116, 123

emplace_hint

Class template flat_map, 191, 197

Class template flat_multimap, 202, 208

Class template flat_multiset, 181, 186

Class template flat_set, 171, 177

Class template map, 151, 159

Class template multimap, 161, 166

Class template multiset, 142, 147

Class template set, 133, 138

end

Class template basic_string, 212, 217, 217

Class template deque, 90, 94, 94, 98, 98, 99

- Class template flat_map, 191, 194, 194, 199, 200, 200, 201, 201
- Class template flat_multimap, 202, 205, 205, 209, 210, 210, 211, 211
- Class template flat_multiset, 181, 184, 184, 188, 189, 189, 189, 189
- Class template flat_set, 171, 174, 174, 178, 179, 179, 180, 180
- Class template list, 101, 105, 105
- Class template map, 151, 154, 154, 159, 160, 160, 160, 160
- Class template multimap, 161, 164, 165, 168, 169, 169, 169, 169
- Class template multiset, 142, 145, 145, 148, 149, 149, 149, 149
- Class template set, 133, 136, 136, 139, 140, 140, 141, 141
- Class template slist, 116, 121, 121, 125, 125
- Class template stable_vector, 79, 80, 83, 83, 87, 88, 88
- Class template vector, 68, 72, 72, 76, 77, 77
- stable_vector, 10

erase

- Class template basic_string, 212, 224, 224, 224, 225
- Class template deque, 90, 100, 100
- Class template flat_map, 191, 199, 200, 200
- Class template flat_multimap, 202, 209, 210, 210
- Class template flat_multiset, 181, 188, 188, 188
- Class template flat_set, 171, 178, 178, 178
- Class template list, 101, 110, 110
- Class template map, 151, 159, 159, 159
- Class template multimap, 161, 168, 168, 168
- Class template multiset, 142, 148, 148, 148
- Class template set, 133, 139, 139, 139
- Class template slist, 116, 131, 131
- Class template stable_vector, 79, 89, 89
- Class template vector, 68, 78, 78
- flat_(multi)map/set associative containers, 11

erase_after

- Class template slist, 116, 125, 125

F**find**

- Class template basic_string, 212, 228, 228, 228, 228
- Class template flat_map, 191, 200, 200
- Class template flat_multimap, 202, 210, 210
- Class template flat_multiset, 181, 189, 189
- Class template flat_set, 171, 179, 179
- Class template map, 151, 160, 160
- Class template multimap, 161, 169, 169
- Class template multiset, 142, 149, 149
- Class template set, 133, 140, 140

flat_(multi)map/set associative containers

- erase, 11

flat_map

- Class template flat_map, 191

flat_multimap

- Class template flat_multimap, 202

flat_multiset

- Class template flat_multiset, 181

flat_set

- Class template flat_set, 171

front

- Class template deque, 90, 96, 96
- Class template list, 101, 107, 107
- Class template slist, 116, 123, 123

Class template `stable_vector`, 79, 86, 86
Class template `vector`, 68, 74, 75

G

`getline`

Header `< boost/container/string.hpp >`, 250

`get_stored_allocator`

Class template `basic_string`, 212, 216, 216
Class template `deque`, 90, 93, 93
Class template `flat_map`, 191, 194, 194
Class template `flat_multimap`, 202, 205, 205
Class template `flat_multiset`, 181, 183, 184
Class template `flat_set`, 171, 173, 174
Class template `list`, 101, 104, 105
Class template `map`, 151, 154, 154
Class template `multimap`, 161, 164, 164
Class template `multiset`, 142, 144, 145
Class template `set`, 133, 135, 136
Class template `slist`, 116, 120, 120
Class template `stable_vector`, 79, 82, 83
Class template `vector`, 68, 71, 71

H

`hash_value`

Header `< boost/container/string.hpp >`, 250

Header `< boost/container/deque.hpp >`
`swap`, 234

Header `< boost/container/flat_map.hpp >`
`swap`, 235

Header `< boost/container/flat_set.hpp >`
`swap`, 236

Header `< boost/container/list.hpp >`
`swap`, 237

Header `< boost/container/map.hpp >`
`swap`, 238

Header `< boost/container/set.hpp >`
`swap`, 248

Header `< boost/container/slist.hpp >`
`swap`, 249

Header `< boost/container/stable_vector.hpp >`
`swap`, 249

Header `< boost/container/string.hpp >`
`getline`, 250
`hash_value`, 250
`string`, 250
`swap`, 250
`wstring`, 250

Header `< boost/container/vector.hpp >`
`swap`, 252

I

`if`

Class template `deque`, 100, 100

`inner_allocator`

Class template `scoped_allocator_adaptor`, 242, 245, 245

`inner_allocator_type`

Class template `scoped_allocator_adaptor`, 242, 243

insert

Class template basic_string, 212, 223, 223, 223, 223, 223, 223, 223, 223, 223, 224, 224, 224, 224
Class template deque, 90, 98, 99, 99, 99
Class template flat_map, 191, 198, 198, 198, 198, 199, 199, 199, 199
Class template flat_multimap, 202, 208, 208, 208, 208, 209, 209, 209, 209
Class template flat_multiset, 181, 187, 187, 187, 187, 187, 188
Class template flat_set, 171, 177, 177, 177, 177, 178, 178
Class template list, 101, 109, 109, 109, 110
Class template map, 151, 157, 157, 157, 157, 157, 157, 158, 158, 158, 158, 158
Class template multimap, 161, 167, 167, 167, 167, 167, 167, 167, 167, 168, 168
Class template multiset, 142, 147, 147, 147, 148, 148
Class template set, 133, 138, 138, 139, 139, 139
Class template slist, 116, 130, 130, 130, 131
Class template stable_vector, 79, 88, 88, 88, 88
Class template vector, 68, 77, 77, 77, 77

insert_after

Class template slist, 116, 124, 124, 124, 124

iterator

vector < bool >, 15

L**list**

Class template list, 101

lower_bound

Class template flat_map, 191, 201, 201
Class template flat_multimap, 202, 211, 211
Class template flat_multiset, 181, 189, 189
Class template flat_set, 171, 179, 180
Class template map, 151, 160, 160
Class template multimap, 161, 169, 169
Class template multiset, 142, 149, 149
Class template set, 133, 140, 141

M**map**

Class template map, 151

max_size

Class template basic_string, 212, 219, 225, 226, 226
Class template deque, 90, 95
Class template flat_map, 191, 196
Class template flat_multimap, 202, 207
Class template flat_multiset, 181, 186
Class template flat_set, 171, 176
Class template list, 101, 107
Class template map, 151, 156
Class template multimap, 161, 166
Class template multiset, 142, 147
Class template scoped_allocator_adaptor, 242, 245
Class template set, 133, 138
Class template slist, 116, 122
Class template stable_vector, 79, 85
Class template vector, 68, 74
Struct template allocator_traits, 64, 66

merge

Class template list, 101, 114, 114, 114, 114
Class template slist, 116, 128, 128, 129, 129

multimap

Class template multimap, 161
multiset
Class template multiset, 142

O

ordered_range_t
Struct ordered_range_t, 232
Struct ordered_unique_range_t, 233
ordered_unique_range_t
Struct ordered_unique_range_t, 233
other
Class template scoped_allocator_adaptor, 242
Struct template rebind, 247
outer_allocator
Class template scoped_allocator_adaptor, 242, 243, 243, 245, 245
outer_allocator_type
Class template scoped_allocator_adaptor, 242
outer_traits_type
Class template scoped_allocator_adaptor, 242, 243

P

pointer
Class template scoped_allocator_adaptor, 242
Struct template allocator_traits, 64, 65
pop_front
Class template deque, 90, 99
Class template list, 101, 110
Class template slist, 116, 125
portable_rebind_alloc
Struct template allocator_traits, 64
Struct template portable_rebind_alloc, 66
previous
Class template slist, 116, 121, 122
propagate_on_container_copy_assignment
Class template scoped_allocator_adaptor, 242, 243
Struct template allocator_traits, 64, 65
propagate_on_container_move_assignment
Class template scoped_allocator_adaptor, 242, 244
Struct template allocator_traits, 64, 65
propagate_on_container_swap
Class template scoped_allocator_adaptor, 242, 244
Struct template allocator_traits, 64, 65
push_back
Class template basic_string, 212, 222
Class template deque, 90, 98, 98
Class template list, 101, 109, 109
Class template stable_vector, 79, 87, 88
Class template vector, 68, 76, 77
push_front
Class template deque, 90, 98, 98
Class template list, 101, 108, 109
Class template slist, 116, 123, 123

R

rbegin
Class template basic_string, 212, 217, 217
Class template deque, 90, 94, 94

- Class template flat_map, 191, 195, 195
- Class template flat_multimap, 202, 206, 206
- Class template flat_multiset, 181, 185, 185
- Class template flat_set, 171, 174, 175
- Class template list, 101, 105, 106
- Class template map, 151, 155, 155
- Class template multimap, 161, 165, 165
- Class template multiset, 142, 145, 145
- Class template set, 133, 136, 136
- Class template stable_vector, 79, 83, 84
- Class template vector, 68, 72, 72

rebind

- Class template scoped_allocator_adaptor, 242
- Struct template rebind, 247

reference

- Struct template allocator_traits, 64, 65

remove

- Class template list, 101, 113
- Class template slist, 116, 127

remove_if

- Class template list, 101, 113
- Class template slist, 116, 128

rend

- Class template basic_string, 212, 217, 218
- Class template deque, 90, 94, 94
- Class template flat_map, 191, 195, 195
- Class template flat_multimap, 202, 206, 206
- Class template flat_multiset, 181, 185, 185
- Class template flat_set, 171, 175, 175
- Class template list, 101, 106, 106
- Class template map, 151, 155, 155
- Class template multimap, 161, 165, 165
- Class template multiset, 142, 146, 146
- Class template set, 133, 137, 137
- Class template stable_vector, 79, 84, 84
- Class template vector, 68, 72, 73

replace

- Class template basic_string, 212, 225, 225, 225, 225, 225, 226, 226, 226, 226, 226, 226, 226, 226, 226, 226, 226, 226, 227, 227, 227, 227

reserve

- Class template basic_string, 212, 219
- Class template flat_map, 191, 196
- Class template flat_multimap, 202, 207
- Class template flat_multiset, 181, 186
- Class template flat_set, 171, 176
- Class template stable_vector, 79, 85
- Class template vector, 68, 74

resize

- Class template basic_string, 212, 219, 219
- Class template deque, 90, 96, 96
- Class template list, 101, 107, 107
- Class template slist, 116, 122, 122
- Class template stable_vector, 79, 85, 85
- Class template vector, 68, 74, 74

rfind

- Class template basic_string, 212, 228, 228, 228, 229

S

- select_on_container_copy_construction
 - Class template scoped_allocator_adaptor, 242, 245
 - Struct template allocator_traits, 64, 66
- set
 - Class template set, 133
- shrink_to_fit
 - Class template basic_string, 212, 219
 - Class template deque, 90, 96
 - Class template flat_map, 191, 197
 - Class template flat_multimap, 202, 207
 - Class template flat_multiset, 181, 186
 - Class template flat_set, 171, 176
 - Class template stable_vector, 79, 86
 - Class template vector, 68, 74
- size_type
 - Class template scoped_allocator_adaptor, 242
 - Struct template allocator_traits, 64, 65
- slist
 - Class template slist, 116
- sort
 - Class template list, 101, 115, 115
 - Class template slist, 116, 129, 129
- stable_vector
 - Class template stable_vector, 79
 - end, 10
- string
 - Header < boost/container/string.hpp >, 250
 - Type definition string, 251
- Struct allocator_arg_t
 - allocator_arg_t, 247
- Struct ordered_range_t
 - ordered_range_t, 232
- Struct ordered_unique_range_t
 - ordered_range_t, 233
 - ordered_unique_range_t, 233
- Struct template allocator_traits
 - allocate, 64, 66, 66
 - allocator_traits, 64
 - allocator_type, 64
 - construct, 64, 66
 - const_pointer, 64, 65
 - const_reference, 64, 65
 - const_void_pointer, 64, 65
 - deallocate, 64, 66
 - destroy, 64, 66
 - difference_type, 64, 65
 - max_size, 64, 66
 - pointer, 64, 65
 - portable_rebind_alloc, 64
 - propagate_on_container_copy_assignment, 64, 65
 - propagate_on_container_move_assignment, 64, 65
 - propagate_on_container_swap, 64, 65
 - reference, 64, 65
 - select_on_container_copy_construction, 64, 66
 - size_type, 64, 65
 - type, 64

- value_type, 64
- void_pointer, 64, 65
- Struct template constructible_with_allocator_prefix
 - allocator_type, 240
 - constructible_with_allocator_prefix, 240, 240
- Struct template constructible_with_allocator_suffix
 - allocator_type, 239
 - constructible_with_allocator_suffix, 239, 239
- Struct template portable_rebind_alloc
 - portable_rebind_alloc, 66
 - type, 66
- Struct template rebind
 - other, 247
 - rebind, 247
- Struct template uses_allocator
 - uses_allocator, 241
- swap
 - Class template basic_string, 212, 227
 - Class template deque, 90, 100
 - Class template flat_map, 191, 200
 - Class template flat_multimap, 202, 210
 - Class template flat_multiset, 181, 188
 - Class template flat_set, 171, 179
 - Class template list, 101, 110
 - Class template map, 151, 159
 - Class template multimap, 161, 168
 - Class template multiset, 142, 148
 - Class template set, 133, 140
 - Class template slist, 116, 125
 - Class template stable_vector, 79, 89
 - Class template vector, 68, 78
 - Header < boost/container/deque.hpp >, 234
 - Header < boost/container/flat_map.hpp >, 235
 - Header < boost/container/flat_set.hpp >, 236
 - Header < boost/container/list.hpp >, 237
 - Header < boost/container/map.hpp >, 238
 - Header < boost/container/set.hpp >, 248
 - Header < boost/container/slist.hpp >, 249
 - Header < boost/container/stable_vector.hpp >, 249
 - Header < boost/container/string.hpp >, 250
 - Header < boost/container/vector.hpp >, 252

T

- type
 - Struct template allocator_traits, 64
 - Struct template portable_rebind_alloc, 66
- Type definition string
 - string, 251
- Type definition wstring
 - wstring, 252

U

- unique
 - Class template list, 101, 113, 113
 - Class template slist, 116, 128, 128
- upper_bound
 - Class template flat_map, 191, 201, 201

- Class template flat_multimap, 202, 211, 211
- Class template flat_multiset, 181, 189, 189
- Class template flat_set, 171, 180, 180
- Class template map, 151, 160, 160
- Class template multimap, 161, 169, 169
- Class template multiset, 142, 149, 149
- Class template set, 133, 141, 141
- uses_allocator
 - Struct template uses_allocator, 241

V

- value_type
 - Class template scoped_allocator_adaptor, 242
 - Struct template allocator_traits, 64
- vector
 - Class template vector, 68
- vector < bool >
 - iterator, 15
- void_pointer
 - Class template scoped_allocator_adaptor, 242
 - Struct template allocator_traits, 64, 65

W

- wstring
 - Header < boost/container/string.hpp >, 250
 - Type definition wstring, 252

Function Index

A

- allocate
 - Class template scoped_allocator_adaptor, 242, 245, 245
 - Struct template allocator_traits, 64, 66, 66
- allocator_arg_t
 - Struct allocator_arg_t, 247
- allocator_traits
 - Struct template allocator_traits, 64
- allocator_type
 - Struct template allocator_traits, 64
 - Struct template constructible_with_allocator_prefix, 240
 - Struct template constructible_with_allocator_suffix, 239
- append
 - Class template basic_string, 212, 220, 220, 221, 221, 221, 221, 221, 221, 221, 221, 221, 221, 221, 221
- assign
 - Class template basic_string, 212, 222, 222, 222, 222, 222, 222, 222, 222, 222, 222, 223, 223
 - Class template deque, 90, 93, 93
 - Class template list, 101, 104, 104
 - Class template slist, 116, 119, 120
 - Class template stable_vector, 79, 82, 82
 - Class template vector, 68, 71, 71
- at
 - Class template basic_string, 212, 220, 220
 - Class template deque, 90, 97, 97
 - Class template flat_map, 191, 197, 197
 - Class template map, 151, 156, 157
 - Class template stable_vector, 79, 87, 87

Class template vector, 68, 75, 76

B

basic_string

Class template basic_string, 212

begin

Class template basic_string, 212, 214, 217, 217

Class template deque, 90, 93, 94

Class template flat_map, 191, 194, 194

Class template flat_multimap, 202, 205, 205

Class template flat_multiset, 181, 184, 184

Class template flat_set, 171, 174, 174

Class template list, 101, 105, 105

Class template map, 151, 154, 154

Class template multimap, 161, 164, 164

Class template multiset, 142, 145, 145

Class template set, 133, 136, 136

Class template slist, 116, 120, 120, 120, 121, 121

Class template stable_vector, 79, 83, 83

Class template vector, 68, 72, 72

C

Class template basic_string

append, 212, 220, 220, 221, 221, 221, 221, 221, 221, 221, 221, 221, 221, 221, 221

assign, 212, 222, 222, 222, 222, 222, 222, 222, 222, 222, 222, 223, 223

at, 212, 220, 220

basic_string, 212

begin, 212, 214, 217, 217

clear, 212, 225

end, 212, 217, 217

erase, 212, 224, 224, 224, 225

find, 212, 228, 228, 228, 228

get_stored_allocator, 212, 216, 216

insert, 212, 223, 223, 223, 223, 223, 223, 223, 223, 223, 224, 224, 224, 224

max_size, 212, 219, 225, 226, 226

push_back, 212, 222

rbegin, 212, 217, 217

rend, 212, 217, 218

replace, 212, 225, 225, 225, 225, 225, 226, 226, 226, 226, 226, 226, 226, 226, 226, 226, 227, 227, 227

reserve, 212, 219

resize, 212, 219, 219

rfind, 212, 228, 228, 228, 229

shrink_to_fit, 212, 219

swap, 212, 227

Class template deque

assign, 90, 93, 93

at, 90, 97, 97

begin, 90, 93, 94

clear, 90, 100

deque, 90

deque_base, 90

emplace, 90, 98

emplace_back, 90, 98

emplace_front, 90, 97

end, 90, 94, 94, 98, 98, 99

erase, 90, 100, 100

front, 90, 96, 96

get_stored_allocator, 90, 93, 93
if, 100, 100
insert, 90, 98, 99, 99, 99
max_size, 90, 95
pop_front, 90, 99
push_back, 90, 98, 98
push_front, 90, 98, 98
rbegin, 90, 94, 94
rend, 90, 94, 94
resize, 90, 96, 96
shrink_to_fit, 90, 96
swap, 90, 100

Class template flat_map
at, 191, 197, 197
begin, 191, 194, 194
clear, 191, 200
emplace, 191, 197
emplace_hint, 191, 197
end, 191, 194, 194, 199, 200, 200, 201, 201
erase, 191, 199, 200, 200
find, 191, 200, 200
flat_map, 191
get_stored_allocator, 191, 194, 194
insert, 191, 198, 198, 198, 198, 199, 199, 199, 199
lower_bound, 191, 201, 201
max_size, 191, 196
rbegin, 191, 195, 195
rend, 191, 195, 195
reserve, 191, 196
shrink_to_fit, 191, 197
swap, 191, 200
upper_bound, 191, 201, 201

Class template flat_multimap
begin, 202, 205, 205
clear, 202, 210
emplace, 202, 208
emplace_hint, 202, 208
end, 202, 205, 205, 209, 210, 210, 211, 211
erase, 202, 209, 210, 210
find, 202, 210, 210
flat_multimap, 202
get_stored_allocator, 202, 205, 205
insert, 202, 208, 208, 208, 208, 209, 209, 209, 209
lower_bound, 202, 211, 211
max_size, 202, 207
rbegin, 202, 206, 206
rend, 202, 206, 206
reserve, 202, 207
shrink_to_fit, 202, 207
swap, 202, 210
upper_bound, 202, 211, 211

Class template flat_multiset
begin, 181, 184, 184
clear, 181, 188
emplace, 181, 186
emplace_hint, 181, 186
end, 181, 184, 184, 188, 189, 189, 189, 189
erase, 181, 188, 188, 188

- find, 181, 189, 189
- flat_multiset, 181
- get_stored_allocator, 181, 183, 184
- insert, 181, 187, 187, 187, 187, 187, 188
- lower_bound, 181, 189, 189
- max_size, 181, 186
- rbegin, 181, 185, 185
- rend, 181, 185, 185
- reserve, 181, 186
- shrink_to_fit, 181, 186
- swap, 181, 188
- upper_bound, 181, 189, 189

Class template flat_set

- begin, 171, 174, 174
- clear, 171, 179
- emplace, 171, 176
- emplace_hint, 171, 177
- end, 171, 174, 174, 178, 179, 179, 180, 180
- erase, 171, 178, 178, 178
- find, 171, 179, 179
- flat_set, 171
- get_stored_allocator, 171, 173, 174
- insert, 171, 177, 177, 177, 177, 178, 178
- lower_bound, 171, 179, 180
- max_size, 171, 176
- rbegin, 171, 174, 175
- rend, 171, 175, 175
- reserve, 171, 176
- shrink_to_fit, 171, 176
- swap, 171, 179
- upper_bound, 171, 180, 180

Class template list

- assign, 101, 104, 104
- begin, 101, 105, 105
- clear, 101, 111
- emplace, 101, 108
- emplace_back, 101, 108
- emplace_front, 101, 108
- end, 101, 105, 105
- erase, 101, 110, 110
- front, 101, 107, 107
- get_stored_allocator, 101, 104, 105
- insert, 101, 109, 109, 109, 110
- list, 101
- max_size, 101, 107
- merge, 101, 114, 114, 114, 114
- pop_front, 101, 110
- push_back, 101, 109, 109
- push_front, 101, 108, 109
- rbegin, 101, 105, 106
- remove, 101, 113
- remove_if, 101, 113
- rend, 101, 106, 106
- resize, 101, 107, 107
- sort, 101, 115, 115
- swap, 101, 110
- unique, 101, 113, 113

Class template map

- at, 151, 156, 157
- begin, 151, 154, 154
- clear, 151, 159
- emplace, 151, 158
- emplace_hint, 151, 159
- end, 151, 154, 154, 159, 160, 160, 160, 160
- erase, 151, 159, 159, 159
- find, 151, 160, 160
- get_stored_allocator, 151, 154, 154
- insert, 151, 157, 157, 157, 157, 157, 157, 158, 158, 158, 158
- lower_bound, 151, 160, 160
- map, 151
- max_size, 151, 156
- rbegin, 151, 155, 155
- rend, 151, 155, 155
- swap, 151, 159
- upper_bound, 151, 160, 160

Class template multimap

- begin, 161, 164, 164
- clear, 161, 168
- emplace, 161, 166
- emplace_hint, 161, 166
- end, 161, 164, 165, 168, 169, 169, 169, 169
- erase, 161, 168, 168, 168
- find, 161, 169, 169
- get_stored_allocator, 161, 164, 164
- insert, 161, 167, 167, 167, 167, 167, 167, 167, 168, 168
- lower_bound, 161, 169, 169
- max_size, 161, 166
- multimap, 161
- rbegin, 161, 165, 165
- rend, 161, 165, 165
- swap, 161, 168
- upper_bound, 161, 169, 169

Class template multiset

- begin, 142, 145, 145
- clear, 142, 148
- emplace, 142, 147
- emplace_hint, 142, 147
- end, 142, 145, 145, 148, 149, 149, 149, 149
- erase, 142, 148, 148, 148
- find, 142, 149, 149
- get_stored_allocator, 142, 144, 145
- insert, 142, 147, 147, 147, 148, 148
- lower_bound, 142, 149, 149
- max_size, 142, 147
- multiset, 142
- rbegin, 142, 145, 145
- rend, 142, 146, 146
- swap, 142, 148
- upper_bound, 142, 149, 149

Class template scoped_allocator_adaptor

- allocate, 242, 245, 245
- construct, 242, 245, 246, 246, 246, 246, 246, 246, 246, 246
- const_pointer, 242
- const_void_pointer, 242
- deallocate, 242, 245
- destroy, 242, 245

- difference_type, 242
- inner_allocator, 242, 245, 245
- inner_allocator_type, 242, 243
- max_size, 242, 245
- other, 242
- outer_allocator, 242, 243, 243, 245, 245
- outer_allocator_type, 242
- outer_traits_type, 242, 243
- pointer, 242
- propagate_on_container_copy_assignment, 242, 243
- propagate_on_container_move_assignment, 242, 244
- propagate_on_container_swap, 242, 244
- rebind, 242
- select_on_container_copy_construction, 242, 245
- size_type, 242
- value_type, 242
- void_pointer, 242

Class template set

- begin, 133, 136, 136
- clear, 133, 140
- emplace, 133, 138
- emplace_hint, 133, 138
- end, 133, 136, 136, 139, 140, 140, 141, 141
- erase, 133, 139, 139, 139
- find, 133, 140, 140
- get_stored_allocator, 133, 135, 136
- insert, 133, 138, 138, 139, 139, 139
- lower_bound, 133, 140, 141
- max_size, 133, 138
- rbegin, 133, 136, 136
- rend, 133, 137, 137
- set, 133
- swap, 133, 140
- upper_bound, 133, 141, 141

Class template slist

- assign, 116, 119, 120
- begin, 116, 120, 120, 120, 121, 121
- clear, 116, 125
- emplace, 116, 130
- emplace_after, 116, 123
- emplace_front, 116, 123
- end, 116, 121, 121, 125, 125
- erase, 116, 131, 131
- erase_after, 116, 125, 125
- front, 116, 123, 123
- get_stored_allocator, 116, 120, 120
- insert, 116, 130, 130, 130, 131
- insert_after, 116, 124, 124, 124, 124
- max_size, 116, 122
- merge, 116, 128, 128, 129, 129
- pop_front, 116, 125
- previous, 116, 121, 122
- push_front, 116, 123, 123
- remove, 116, 127
- remove_if, 116, 128
- resize, 116, 122, 122
- slist, 116
- sort, 116, 129, 129

- swap, 116, 125
- unique, 116, 128, 128
- Class template `stable_vector`
 - assign, 79, 82, 82
 - at, 79, 87, 87
 - begin, 79, 83, 83
 - clear, 79, 89
 - emplace, 79, 87
 - emplace_back, 79, 87
 - end, 79, 80, 83, 83, 87, 88, 88
 - erase, 79, 89, 89
 - front, 79, 86, 86
 - get_stored_allocator, 79, 82, 83
 - insert, 79, 88, 88, 88, 88
 - max_size, 79, 85
 - push_back, 79, 87, 88
 - rbegin, 79, 83, 84
 - rend, 79, 84, 84
 - reserve, 79, 85
 - resize, 79, 85, 85
 - shrink_to_fit, 79, 86
 - stable_vector, 79
 - swap, 79, 89
- Class template `vector`
 - assign, 68, 71, 71
 - at, 68, 75, 76
 - begin, 68, 72, 72
 - clear, 68, 78
 - emplace, 68, 76
 - emplace_back, 68, 76
 - end, 68, 72, 72, 76, 77, 77
 - erase, 68, 78, 78
 - front, 68, 74, 75
 - get_stored_allocator, 68, 71, 71
 - insert, 68, 77, 77, 77, 77
 - max_size, 68, 74
 - push_back, 68, 76, 77
 - rbegin, 68, 72, 72
 - rend, 68, 72, 73
 - reserve, 68, 74
 - resize, 68, 74, 74
 - shrink_to_fit, 68, 74
 - swap, 68, 78
 - vector, 68
- clear
 - Class template `basic_string`, 212, 225
 - Class template `deque`, 90, 100
 - Class template `flat_map`, 191, 200
 - Class template `flat_multimap`, 202, 210
 - Class template `flat_multiset`, 181, 188
 - Class template `flat_set`, 171, 179
 - Class template `list`, 101, 111
 - Class template `map`, 151, 159
 - Class template `multimap`, 161, 168
 - Class template `multiset`, 142, 148
 - Class template `set`, 133, 140
 - Class template `slist`, 116, 125
 - Class template `stable_vector`, 79, 89

- Class template vector, 68, 78
- construct
 - Class template scoped_allocator_adaptor, 242, 245, 246, 246, 246, 246, 246, 246, 246, 246
 - Struct template allocator_traits, 64, 66
- constructible_with_allocator_prefix
 - Struct template constructible_with_allocator_prefix, 240, 240
- constructible_with_allocator_suffix
 - Struct template constructible_with_allocator_suffix, 239, 239
- const_pointer
 - Class template scoped_allocator_adaptor, 242
 - Struct template allocator_traits, 64, 65
- const_reference
 - Struct template allocator_traits, 64, 65
- const_void_pointer
 - Class template scoped_allocator_adaptor, 242
 - Struct template allocator_traits, 64, 65

D

- deallocate
 - Class template scoped_allocator_adaptor, 242, 245
 - Struct template allocator_traits, 64, 66
- deque
 - Class template deque, 90
- deque_base
 - Class template deque, 90
- destroy
 - Class template scoped_allocator_adaptor, 242, 245
 - Struct template allocator_traits, 64, 66
- difference_type
 - Class template scoped_allocator_adaptor, 242
 - Struct template allocator_traits, 64, 65

E

- emplace
 - Class template deque, 90, 98
 - Class template flat_map, 191, 197
 - Class template flat_multimap, 202, 208
 - Class template flat_multiset, 181, 186
 - Class template flat_set, 171, 176
 - Class template list, 101, 108
 - Class template map, 151, 158
 - Class template multimap, 161, 166
 - Class template multiset, 142, 147
 - Class template set, 133, 138
 - Class template slist, 116, 130
 - Class template stable_vector, 79, 87
 - Class template vector, 68, 76
- emplace_after
 - Class template slist, 116, 123
- emplace_back
 - Class template deque, 90, 98
 - Class template list, 101, 108
 - Class template stable_vector, 79, 87
 - Class template vector, 68, 76
- emplace_front
 - Class template deque, 90, 97
 - Class template list, 101, 108

- Class template slist, 116, 123
- emplace_hint
 - Class template flat_map, 191, 197
 - Class template flat_multimap, 202, 208
 - Class template flat_multiset, 181, 186
 - Class template flat_set, 171, 177
 - Class template map, 151, 159
 - Class template multimap, 161, 166
 - Class template multiset, 142, 147
 - Class template set, 133, 138
- end
 - Class template basic_string, 212, 217, 217
 - Class template deque, 90, 94, 94, 98, 98, 99
 - Class template flat_map, 191, 194, 194, 199, 200, 200, 201, 201
 - Class template flat_multimap, 202, 205, 205, 209, 210, 210, 211, 211
 - Class template flat_multiset, 181, 184, 184, 188, 189, 189, 189, 189
 - Class template flat_set, 171, 174, 174, 178, 179, 179, 180, 180
 - Class template list, 101, 105, 105
 - Class template map, 151, 154, 154, 159, 160, 160, 160, 160
 - Class template multimap, 161, 164, 165, 168, 169, 169, 169, 169
 - Class template multiset, 142, 145, 145, 148, 149, 149, 149, 149
 - Class template set, 133, 136, 136, 139, 140, 140, 141, 141
 - Class template slist, 116, 121, 121, 125, 125
 - Class template stable_vector, 79, 80, 83, 83, 87, 88, 88
 - Class template vector, 68, 72, 72, 76, 77, 77
 - stable_vector, 10
- erase
 - Class template basic_string, 212, 224, 224, 224, 225
 - Class template deque, 90, 100, 100
 - Class template flat_map, 191, 199, 200, 200
 - Class template flat_multimap, 202, 209, 210, 210
 - Class template flat_multiset, 181, 188, 188, 188
 - Class template flat_set, 171, 178, 178, 178
 - Class template list, 101, 110, 110
 - Class template map, 151, 159, 159, 159
 - Class template multimap, 161, 168, 168, 168
 - Class template multiset, 142, 148, 148, 148
 - Class template set, 133, 139, 139, 139
 - Class template slist, 116, 131, 131
 - Class template stable_vector, 79, 89, 89
 - Class template vector, 68, 78, 78
 - flat_(multi)map/set associative containers, 11
- erase_after
 - Class template slist, 116, 125, 125

F

- find
 - Class template basic_string, 212, 228, 228, 228, 228
 - Class template flat_map, 191, 200, 200
 - Class template flat_multimap, 202, 210, 210
 - Class template flat_multiset, 181, 189, 189
 - Class template flat_set, 171, 179, 179
 - Class template map, 151, 160, 160
 - Class template multimap, 161, 169, 169
 - Class template multiset, 142, 149, 149
 - Class template set, 133, 140, 140
- flat_(multi)map/set associative containers

- erase, 11
- flat_map
 - Class template flat_map, 191
- flat_multimap
 - Class template flat_multimap, 202
- flat_multiset
 - Class template flat_multiset, 181
- flat_set
 - Class template flat_set, 171
- front
 - Class template deque, 90, 96, 96
 - Class template list, 101, 107, 107
 - Class template slist, 116, 123, 123
 - Class template stable_vector, 79, 86, 86
 - Class template vector, 68, 74, 75

G

- getline
 - Header < boost/container/string.hpp >, 250
- get_stored_allocator
 - Class template basic_string, 212, 216, 216
 - Class template deque, 90, 93, 93
 - Class template flat_map, 191, 194, 194
 - Class template flat_multimap, 202, 205, 205
 - Class template flat_multiset, 181, 183, 184
 - Class template flat_set, 171, 173, 174
 - Class template list, 101, 104, 105
 - Class template map, 151, 154, 154
 - Class template multimap, 161, 164, 164
 - Class template multiset, 142, 144, 145
 - Class template set, 133, 135, 136
 - Class template slist, 116, 120, 120
 - Class template stable_vector, 79, 82, 83
 - Class template vector, 68, 71, 71

H

- hash_value
 - Header < boost/container/string.hpp >, 250
- Header < boost/container/deque.hpp >
 - swap, 234
- Header < boost/container/flat_map.hpp >
 - swap, 235
- Header < boost/container/flat_set.hpp >
 - swap, 236
- Header < boost/container/list.hpp >
 - swap, 237
- Header < boost/container/map.hpp >
 - swap, 238
- Header < boost/container/set.hpp >
 - swap, 248
- Header < boost/container/slist.hpp >
 - swap, 249
- Header < boost/container/stable_vector.hpp >
 - swap, 249
- Header < boost/container/string.hpp >
 - getline, 250
 - hash_value, 250

string, 250
swap, 250
wstring, 250

Header < boost/container/vector.hpp >
swap, 252

I

if

Class template deque, 100, 100

inner_allocator

Class template scoped_allocator_adaptor, 242, 245, 245

inner_allocator_type

Class template scoped_allocator_adaptor, 242, 243

insert

Class template basic_string, 212, 223, 223, 223, 223, 223, 223, 223, 223, 223, 224, 224, 224, 224

Class template deque, 90, 98, 99, 99, 99

Class template flat_map, 191, 198, 198, 198, 198, 199, 199, 199, 199

Class template flat_multimap, 202, 208, 208, 208, 208, 209, 209, 209, 209

Class template flat_multiset, 181, 187, 187, 187, 187, 187, 188

Class template flat_set, 171, 177, 177, 177, 177, 178, 178

Class template list, 101, 109, 109, 109, 110

Class template map, 151, 157, 157, 157, 157, 157, 157, 158, 158, 158, 158, 158

Class template multimap, 161, 167, 167, 167, 167, 167, 167, 167, 167, 168, 168

Class template multiset, 142, 147, 147, 147, 148, 148

Class template set, 133, 138, 138, 139, 139, 139

Class template slist, 116, 130, 130, 130, 131

Class template stable_vector, 79, 88, 88, 88, 88

Class template vector, 68, 77, 77, 77, 77

insert_after

Class template slist, 116, 124, 124, 124, 124

iterator

vector < bool >, 15

L

list

Class template list, 101

lower_bound

Class template flat_map, 191, 201, 201

Class template flat_multimap, 202, 211, 211

Class template flat_multiset, 181, 189, 189

Class template flat_set, 171, 179, 180

Class template map, 151, 160, 160

Class template multimap, 161, 169, 169

Class template multiset, 142, 149, 149

Class template set, 133, 140, 141

M

map

Class template map, 151

max_size

Class template basic_string, 212, 219, 225, 226, 226

Class template deque, 90, 95

Class template flat_map, 191, 196

Class template flat_multimap, 202, 207

Class template flat_multiset, 181, 186

Class template flat_set, 171, 176

Class template list, 101, 107

- Class template map, 151, 156
- Class template multimap, 161, 166
- Class template multiset, 142, 147
- Class template scoped_allocator_adaptor, 242, 245
- Class template set, 133, 138
- Class template slist, 116, 122
- Class template stable_vector, 79, 85
- Class template vector, 68, 74
- Struct template allocator_traits, 64, 66
- merge
 - Class template list, 101, 114, 114, 114, 114
 - Class template slist, 116, 128, 128, 129, 129
- multimap
 - Class template multimap, 161
- multiset
 - Class template multiset, 142

O

- ordered_range_t
 - Struct ordered_range_t, 232
 - Struct ordered_unique_range_t, 233
- ordered_unique_range_t
 - Struct ordered_unique_range_t, 233
- other
 - Class template scoped_allocator_adaptor, 242
 - Struct template rebind, 247
- outer_allocator
 - Class template scoped_allocator_adaptor, 242, 243, 243, 245, 245
- outer_allocator_type
 - Class template scoped_allocator_adaptor, 242
- outer_traits_type
 - Class template scoped_allocator_adaptor, 242, 243

P

- pointer
 - Class template scoped_allocator_adaptor, 242
 - Struct template allocator_traits, 64, 65
- pop_front
 - Class template deque, 90, 99
 - Class template list, 101, 110
 - Class template slist, 116, 125
- portable_rebind_alloc
 - Struct template allocator_traits, 64
 - Struct template portable_rebind_alloc, 66
- previous
 - Class template slist, 116, 121, 122
- propagate_on_container_copy_assignment
 - Class template scoped_allocator_adaptor, 242, 243
 - Struct template allocator_traits, 64, 65
- propagate_on_container_move_assignment
 - Class template scoped_allocator_adaptor, 242, 244
 - Struct template allocator_traits, 64, 65
- propagate_on_container_swap
 - Class template scoped_allocator_adaptor, 242, 244
 - Struct template allocator_traits, 64, 65
- push_back
 - Class template basic_string, 212, 222

Class template deque, 90, 98, 98
Class template list, 101, 109, 109
Class template stable_vector, 79, 87, 88
Class template vector, 68, 76, 77

push_front

Class template deque, 90, 98, 98
Class template list, 101, 108, 109
Class template slist, 116, 123, 123

R

rbegin

Class template basic_string, 212, 217, 217
Class template deque, 90, 94, 94
Class template flat_map, 191, 195, 195
Class template flat_multimap, 202, 206, 206
Class template flat_multiset, 181, 185, 185
Class template flat_set, 171, 174, 175
Class template list, 101, 105, 106
Class template map, 151, 155, 155
Class template multimap, 161, 165, 165
Class template multiset, 142, 145, 145
Class template set, 133, 136, 136
Class template stable_vector, 79, 83, 84
Class template vector, 68, 72, 72

rebind

Class template scoped_allocator_adaptor, 242
Struct template rebind, 247

reference

Struct template allocator_traits, 64, 65

remove

Class template list, 101, 113
Class template slist, 116, 127

remove_if

Class template list, 101, 113
Class template slist, 116, 128

rend

Class template basic_string, 212, 217, 218
Class template deque, 90, 94, 94
Class template flat_map, 191, 195, 195
Class template flat_multimap, 202, 206, 206
Class template flat_multiset, 181, 185, 185
Class template flat_set, 171, 175, 175
Class template list, 101, 106, 106
Class template map, 151, 155, 155
Class template multimap, 161, 165, 165
Class template multiset, 142, 146, 146
Class template set, 133, 137, 137
Class template stable_vector, 79, 84, 84
Class template vector, 68, 72, 73

replace

Class template basic_string, 212, 225, 225, 225, 225, 225, 226, 226, 226, 226, 226, 226, 226, 226, 227, 227, 227, 227

reserve

Class template basic_string, 212, 219
Class template flat_map, 191, 196
Class template flat_multimap, 202, 207
Class template flat_multiset, 181, 186
Class template flat_set, 171, 176

Class template `stable_vector`, 79, 85

Class template `vector`, 68, 74

resize

Class template `basic_string`, 212, 219, 219

Class template `deque`, 90, 96, 96

Class template `list`, 101, 107, 107

Class template `slist`, 116, 122, 122

Class template `stable_vector`, 79, 85, 85

Class template `vector`, 68, 74, 74

rfind

Class template `basic_string`, 212, 228, 228, 228, 229

S

select_on_container_copy_construction

Class template `scoped_allocator_adaptor`, 242, 245

Struct template `allocator_traits`, 64, 66

set

Class template `set`, 133

shrink_to_fit

Class template `basic_string`, 212, 219

Class template `deque`, 90, 96

Class template `flat_map`, 191, 197

Class template `flat_multimap`, 202, 207

Class template `flat_multiset`, 181, 186

Class template `flat_set`, 171, 176

Class template `stable_vector`, 79, 86

Class template `vector`, 68, 74

size_type

Class template `scoped_allocator_adaptor`, 242

Struct template `allocator_traits`, 64, 65

slist

Class template `slist`, 116

sort

Class template `list`, 101, 115, 115

Class template `slist`, 116, 129, 129

stable_vector

Class template `stable_vector`, 79

`end`, 10

string

Header `<boost/container/string.hpp>`, 250

Type definition `string`, 251

Struct `allocator_arg_t`

`allocator_arg_t`, 247

Struct `ordered_range_t`

`ordered_range_t`, 232

Struct `ordered_unique_range_t`

`ordered_range_t`, 233

`ordered_unique_range_t`, 233

Struct template `allocator_traits`

`allocate`, 64, 66, 66

`allocator_traits`, 64

`allocator_type`, 64

`construct`, 64, 66

`const_pointer`, 64, 65

`const_reference`, 64, 65

`const_void_pointer`, 64, 65

`deallocate`, 64, 66

- destroy, 64, 66
- difference_type, 64, 65
- max_size, 64, 66
- pointer, 64, 65
- portable_rebind_alloc, 64
- propagate_on_container_copy_assignment, 64, 65
- propagate_on_container_move_assignment, 64, 65
- propagate_on_container_swap, 64, 65
- reference, 64, 65
- select_on_container_copy_construction, 64, 66
- size_type, 64, 65
- type, 64
- value_type, 64
- void_pointer, 64, 65
- Struct template constructible_with_allocator_prefix
 - allocator_type, 240
 - constructible_with_allocator_prefix, 240, 240
- Struct template constructible_with_allocator_suffix
 - allocator_type, 239
 - constructible_with_allocator_suffix, 239, 239
- Struct template portable_rebind_alloc
 - portable_rebind_alloc, 66
 - type, 66
- Struct template rebind
 - other, 247
 - rebind, 247
- Struct template uses_allocator
 - uses_allocator, 241
- swap
 - Class template basic_string, 212, 227
 - Class template deque, 90, 100
 - Class template flat_map, 191, 200
 - Class template flat_multimap, 202, 210
 - Class template flat_multiset, 181, 188
 - Class template flat_set, 171, 179
 - Class template list, 101, 110
 - Class template map, 151, 159
 - Class template multimap, 161, 168
 - Class template multiset, 142, 148
 - Class template set, 133, 140
 - Class template slist, 116, 125
 - Class template stable_vector, 79, 89
 - Class template vector, 68, 78
 - Header < boost/container/deque.hpp >, 234
 - Header < boost/container/flat_map.hpp >, 235
 - Header < boost/container/flat_set.hpp >, 236
 - Header < boost/container/list.hpp >, 237
 - Header < boost/container/map.hpp >, 238
 - Header < boost/container/set.hpp >, 248
 - Header < boost/container/slist.hpp >, 249
 - Header < boost/container/stable_vector.hpp >, 249
 - Header < boost/container/string.hpp >, 250
 - Header < boost/container/vector.hpp >, 252

T

type

- Struct template allocator_traits, 64

Struct template portable_rebind_alloc, 66

Type definition string

string, 251

Type definition wstring

wstring, 252

U

unique

Class template list, 101, 113, 113

Class template slist, 116, 128, 128

upper_bound

Class template flat_map, 191, 201, 201

Class template flat_multimap, 202, 211, 211

Class template flat_multiset, 181, 189, 189

Class template flat_set, 171, 180, 180

Class template map, 151, 160, 160

Class template multimap, 161, 169, 169

Class template multiset, 142, 149, 149

Class template set, 133, 141, 141

uses_allocator

Struct template uses_allocator, 241

V

value_type

Class template scoped_allocator_adaptor, 242

Struct template allocator_traits, 64

vector

Class template vector, 68

vector < bool >

iterator, 15

void_pointer

Class template scoped_allocator_adaptor, 242

Struct template allocator_traits, 64, 65

W

wstring

Header < boost/container/string.hpp >, 250

Type definition wstring, 252

Boost.Container Header Reference

Header <boost/container/allocator_traits.hpp>

```
template<typename Alloc> struct allocator_traits;
```

Struct template allocator_traits

allocator_traits

Synopsis

```
// In header: <boost/container/allocator_traits.hpp>

template<typename Alloc>
struct allocator_traits {
    // types
    typedef Alloc allocator_type;
    typedef Alloc::value_type value_type;
    typedef unspecified pointer;
    typedef see_documentation const_pointer;
    typedef see_documentation reference;
    typedef see_documentation const_reference;
    typedef see_documentation void_pointer;
    typedef see_documentation const_void_pointer;
    typedef see_documentation difference_type;
    typedef see_documentation size_type;
    typedef see_documentation propagate_on_container_copy_assignment;
    typedef see_documentation propagate_on_container_move_assignment;
    typedef see_documentation propagate_on_container_swap;
    typedef see_documentation rebind_alloc;
    typedef allocator_traits< rebind_alloc< T > > rebind_traits;

    // member classes/structs/unions
    template<typename T>
    struct portable_rebind_alloc {
        // types
        typedef see_documentation type;
    };

    // public static functions
    static pointer allocate(Alloc &, size_type);
    static void deallocate(Alloc &, pointer, size_type);
    static pointer allocate(Alloc &, size_type, const_void_pointer);
    template<typename T> static void destroy(Alloc &, T *);
    static size_type max_size(const Alloc &);
    static Alloc select_on_container_copy_construction(const Alloc &);
    template<typename T, class... Args>
        static void construct(Alloc &, T *, Args &&...);
};
```

Description

The class template `allocator_traits` supplies a uniform interface to all allocator types. This class is a C++03-compatible implementation of `std::allocator_traits`

allocator_traits public types

1. typedef unspecified pointer;

Alloc::pointer if such a type exists; otherwise, value_type*

2. typedef see_documentation const_pointer;

Alloc::const_pointer if such a type exists ; otherwise, pointer_traits<pointer>::rebind<const

3. typedef see_documentation reference;

Non-standard extension Alloc::reference if such a type exists; otherwise, value_type&

4. typedef see_documentation const_reference;

Non-standard extension Alloc::const_reference if such a type exists ; otherwise, const value_type&

5. typedef see_documentation void_pointer;

Alloc::void_pointer if such a type exists ; otherwise, pointer_traits<pointer>::rebind<void>.

6. typedef see_documentation const_void_pointer;

Alloc::const_void_pointer if such a type exists ; otherwise, pointer_traits<pointer>::rebind<const

7. typedef see_documentation difference_type;

Alloc::difference_type if such a type exists ; otherwise, pointer_traits<pointer>::difference_type.

8. typedef see_documentation size_type;

Alloc::size_type if such a type exists ; otherwise, make_unsigned<difference_type>::type

9. typedef see_documentation propagate_on_container_copy_assignment;

Alloc::propagate_on_container_copy_assignment if such a type exists, otherwise an integral_constant type with internal constant static member value == false.

10. typedef see_documentation propagate_on_container_move_assignment;

Alloc::propagate_on_container_move_assignment if such a type exists, otherwise an integral_constant type with internal constant static member value == false.

11. typedef see_documentation propagate_on_container_swap;

Alloc::propagate_on_container_swap if such a type exists, otherwise an integral_constant type with internal constant static member value == false.

12. typedef see_documentation rebind_alloc;

Defines an allocator: Alloc::rebind<T>::other if such a type exists; otherwise, Alloc<T, Args> if Alloc is a class template instantiation of the form Alloc<U, Args>, where Args is zero or more type arguments ; otherwise, the instantiation of rebind_alloc is ill-formed.

In C++03 compilers rebind_alloc is a struct derived from an allocator deduced by previously detailed rules.

13. typedef allocator_traits< rebind_alloc< T > > rebind_traits;

In C++03 compilers rebind_traits is a struct derived from allocator_traits<OtherAlloc>, where OtherAlloc is the allocator deduced by rules explained in rebind_alloc.

allocator_traits public static functions

1.

```
static pointer allocate(Alloc & a, size_type n);
```

Returns: a.allocate(n)

2.

```
static void deallocate(Alloc & a, pointer p, size_type n);
```

Returns: a.deallocate(p, n)

Throws: Nothing

3.

```
static pointer allocate(Alloc & a, size_type n, const_void_pointer p);
```

Effects: calls a.allocate(n, p) if that call is well-formed; otherwise, invokes a.allocate(n)

4.

```
template<typename T> static void destroy(Alloc & a, T * p);
```

Effects: calls a.destroy(p) if that call is well-formed; otherwise, invokes p->~T().

5.

```
static size_type max_size(const Alloc & a);
```

Returns: a.max_size() if that expression is well-formed; otherwise, numeric_limits<size_type>::max().

6.

```
static Alloc select_on_container_copy_construction(const Alloc & a);
```

Returns: a.select_on_container_copy_construction() if that expression is well-formed; otherwise, a.

7.

```
template<typename T, class... Args>
static void construct(Alloc & a, T * p, Args &&... args);
```

Effects: calls a.construct(p, std::forward<Args>(args)...) if that call is well-formed; otherwise, invokes ::new (static_cast<void*>(p)) T(std::forward<Args>(args)...))

Struct template portable_rebind_alloc

allocator_traits::portable_rebind_alloc

Synopsis

```
// In header: <boost/container/allocator_traits.hpp>

template<typename T>
struct portable_rebind_alloc {
    // types
    typedef see_documentation type;
};
```

Description

Non-standard extension: Portable allocator rebind for C++03 and C++11 compilers. type is an allocator related to Alloc deduced deduced by rules explained in rebind_alloc.

Header <boost/container/container_fwd.hpp>

```

namespace boost {
  namespace container {
    template<typename T, typename Allocator = std::allocator<T> > class vector;
    template<typename T, typename Allocator = std::allocator<T> >
      class stable_vector;
    template<typename T, typename Allocator = std::allocator<T> > class deque;
    template<typename T, typename Allocator = std::allocator<T> > class list;
    template<typename T, typename Allocator = std::allocator<T> > class slist;
    template<typename Key, typename Compare = std::less<Key>,
      typename Allocator = std::allocator<Key> >
      class set;
    template<typename Key, typename Compare = std::less<Key>,
      typename Allocator = std::allocator<Key> >
      class multiset;
    template<typename Key, typename T, typename Compare = std::less<Key>,
      typename Allocator = std::allocator<std::pair<const Key, T> > >
      class map;
    template<typename Key, typename T, typename Compare = std::less<Key>,
      typename Allocator = std::allocator<std::pair<const Key, T> > >
      class multimap;
    template<typename Key, typename Compare = std::less<Key>,
      typename Allocator = std::allocator<Key> >
      class flat_set;
    template<typename Key, typename Compare = std::less<Key>,
      typename Allocator = std::allocator<Key> >
      class flat_multiset;
    template<typename Key, typename T, typename Compare = std::less<Key>,
      typename Allocator = std::allocator<std::pair<Key, T> > >
      class flat_map;
    template<typename Key, typename T, typename Compare = std::less<Key>,
      typename Allocator = std::allocator<std::pair<Key, T> > >
      class flat_multimap;
    template<typename CharT, typename Traits = std::char_traits<CharT>,
      typename Allocator = std::allocator<CharT> >
      class basic_string;

    struct ordered_range_t;
    struct ordered_unique_range_t;

    static const ordered_range_t ordered_range;
    static const ordered_unique_range_t ordered_unique_range;
  }
}

```

Class template vector

boost::container::vector

Synopsis

```
// In header: <boost/container/container_fwd.hpp>

template<typename T, typename Allocator = std::allocator<T> >
class vector {
public:
    // construct/copy/destroy
    vector();
    explicit vector(const Allocator &);
    explicit vector(size_type);
    vector(size_type, const T &, const allocator_type & = allocator_type());
    template<typename InIt>
        vector(InIt, InIt, const allocator_type & = allocator_type());
    vector(const vector &);
    vector(vector &&);
    vector(const vector &, const allocator_type &);
    vector(vector &&, const allocator_type &);
    vector& operator=(const vector &);
    vector& operator=(vector &&);
    ~vector();

    // public member functions
    template<typename InIt> void assign(InIt, InIt);
    void assign(size_type, const value_type &);
    allocator_type get_allocator() const;
    stored_allocator_type & get_stored_allocator();
    const stored_allocator_type & get_stored_allocator() const;
    iterator begin();
    const_iterator begin() const;
    iterator end();
    const_iterator end() const;
    reverse_iterator rbegin();
    const_reverse_iterator rbegin() const;
    reverse_iterator rend();
    const_reverse_iterator rend() const;
    const_iterator cbegin() const;
    const_iterator cend() const;
    const_reverse_iterator crbegin() const;
    const_reverse_iterator crend() const;
    bool empty() const;
    size_type size() const;
    size_type max_size() const;
    void resize(size_type);
    void resize(size_type, const T &);
    size_type capacity() const;
    void reserve(size_type);
    void shrink_to_fit();
    reference front();
    const_reference front() const;
    reference back();
    const_reference back() const;
    reference operator[](size_type);
    const_reference operator[](size_type) const;
    reference at(size_type);
    const_reference at(size_type) const;
    T * data();
    const T * data() const;
    template<class... Args> void emplace_back(Args &&...);
    template<class... Args> iterator emplace(const_iterator, Args &&...);
    void push_back(const T &);
    void push_back(T &&);
```

```

iterator insert(const_iterator, const T &);
iterator insert(const_iterator, T &&);
iterator insert(const_iterator, size_type, const T &);
template<typename InIt> iterator insert(const_iterator, InIt, InIt);
void pop_back();
iterator erase(const_iterator);
iterator erase(const_iterator, const_iterator);
void swap(vector &);
void clear();
};

```

Description

A vector is a sequence that supports random access to elements, constant time insertion and removal of elements at the end, and linear time insertion and removal of elements at the beginning or in the middle. The number of elements in a vector may vary dynamically; memory management is automatic. `boost::container::vector` is similar to `std::vector` but it's compatible with shared memory and memory mapped files.

vector public construct/copy/destroy

1. `vector();`

Effects: Constructs a vector taking the allocator as parameter.

Throws: If allocator_type's default constructor throws.

Complexity: Constant.

2. `explicit vector(const Allocator & a);`

Effects: Constructs a vector taking the allocator as parameter.

Throws: Nothing

Complexity: Constant.

3. `explicit vector(size_type n);`

Effects: Constructs a vector that will use a copy of allocator a and inserts n default constructed values.

Throws: If allocator_type's default constructor or allocation throws or T's default constructor throws.

Complexity: Linear to n.

4. `vector(size_type n, const T & value,
const allocator_type & a = allocator_type());`

Effects: Constructs a vector that will use a copy of allocator a and inserts n copies of value.

Throws: If allocator_type's default constructor or allocation throws or T's copy constructor throws.

Complexity: Linear to n.

5. `template<typename InIt>
vector(InIt first, InIt last, const allocator_type & a = allocator_type());`

Effects: Constructs a vector that will use a copy of allocator `a` and inserts a copy of the range `[first, last)` in the vector.

Throws: If `allocator_type`'s default constructor or allocation throws or `T`'s constructor taking an dereferenced `InIt` throws.

Complexity: Linear to the range `[first, last)`.

6.

```
vector(const vector & x);
```

Effects: Copy constructs a vector.

Postcondition: `x == *this`.

Throws: If `allocator_type`'s default constructor or allocation throws or `T`'s copy constructor throws.

Complexity: Linear to the elements `x` contains.

7.

```
vector(vector && mx);
```

Effects: Move constructor. Moves `mx`'s resources to `*this`.

Throws: Nothing

Complexity: Constant.

8.

```
vector(const vector & x, const allocator_type & a);
```

Effects: Copy constructs a vector using the specified allocator.

Postcondition: `x == *this`.

Throws: If allocation throws or `T`'s copy constructor throws.

Complexity: Linear to the elements `x` contains.

9.

```
vector(vector && mx, const allocator_type & a);
```

Effects: Move constructor using the specified allocator. Moves `mx`'s resources to `*this` if `a == allocator_type()`. Otherwise copies values from `x` to `*this`.

Throws: If allocation or `T`'s copy constructor throws.

Complexity: Constant if `a == mx.get_allocator()`, linear otherwise.

10.

```
vector& operator=(const vector & x);
```

Effects: Makes `*this` contain the same elements as `x`.

Postcondition: `this->size() == x.size()`. `*this` contains a copy of each of `x`'s elements.

Throws: If memory allocation throws or `T`'s copy/move constructor/assignment throws.

Complexity: Linear to the number of elements in `x`.

11.

```
vector& operator=(vector && x);
```

Effects: Move assignment. All `mx`'s values are transferred to `*this`.

Postcondition: `x.empty()`. *this contains a the elements x had before the function.

Throws: Nothing

Complexity: Linear.

12.

```
~vector();
```

Effects: Destroys the vector. All stored values are destroyed and used memory is deallocated.

Throws: Nothing.

Complexity: Linear to the number of elements.

vector public member functions

1.

```
template<typename InIt> void assign(InIt first, InIt last);
```

Effects: Assigns the the range `[first, last)` to *this.

Throws: If memory allocation throws or T's copy/move constructor/assignment or T's constructor/assignment from dereferencing `InIt` throws.

Complexity: Linear to n.

2.

```
void assign(size_type n, const value_type & val);
```

Effects: Assigns the n copies of `val` to *this.

Throws: If memory allocation throws or T's copy/move constructor/assignment throws.

Complexity: Linear to n.

3.

```
allocator_type get_allocator() const;
```

Effects: Returns a copy of the internal allocator.

Throws: If allocator's copy constructor throws.

Complexity: Constant.

4.

```
stored_allocator_type & get_stored_allocator();
```

Effects: Returns a reference to the internal allocator.

Throws: Nothing

Complexity: Constant.

Note: Non-standard extension.

5.

```
const stored_allocator_type & get_stored_allocator() const;
```

Effects: Returns a reference to the internal allocator.

Throws: Nothing

Complexity: Constant.

Note: Non-standard extension.

6.

```
iterator begin();
```

Effects: Returns an iterator to the first element contained in the vector.

Throws: Nothing.

Complexity: Constant.

7.

```
const_iterator begin() const;
```

Effects: Returns a const_iterator to the first element contained in the vector.

Throws: Nothing.

Complexity: Constant.

8.

```
iterator end();
```

Effects: Returns an iterator to the end of the vector.

Throws: Nothing.

Complexity: Constant.

9.

```
const_iterator end() const;
```

Effects: Returns a const_iterator to the end of the vector.

Throws: Nothing.

Complexity: Constant.

10.

```
reverse_iterator rbegin();
```

Effects: Returns a reverse_iterator pointing to the beginning of the reversed vector.

Throws: Nothing.

Complexity: Constant.

11.

```
const_reverse_iterator rbegin() const;
```

Effects: Returns a const_reverse_iterator pointing to the beginning of the reversed vector.

Throws: Nothing.

Complexity: Constant.

12.

```
reverse_iterator rend();
```

Effects: Returns a reverse_iterator pointing to the end of the reversed vector.

Throws: Nothing.

Complexity: Constant.

```
13. const_reverse_iterator rend() const;
```

Effects: Returns a `const_reverse_iterator` pointing to the end of the reversed vector.

Throws: Nothing.

Complexity: Constant.

```
14. const_iterator cbegin() const;
```

Effects: Returns a `const_iterator` to the first element contained in the vector.

Throws: Nothing.

Complexity: Constant.

```
15. const_iterator cend() const;
```

Effects: Returns a `const_iterator` to the end of the vector.

Throws: Nothing.

Complexity: Constant.

```
16. const_reverse_iterator crbegin() const;
```

Effects: Returns a `const_reverse_iterator` pointing to the beginning of the reversed vector.

Throws: Nothing.

Complexity: Constant.

```
17. const_reverse_iterator crend() const;
```

Effects: Returns a `const_reverse_iterator` pointing to the end of the reversed vector.

Throws: Nothing.

Complexity: Constant.

```
18. bool empty() const;
```

Effects: Returns true if the vector contains no elements.

Throws: Nothing.

Complexity: Constant.

```
19. size_type size() const;
```

Effects: Returns the number of the elements contained in the vector.

Throws: Nothing.

Complexity: Constant.

```
20. size_type max_size() const;
```

Effects: Returns the largest possible size of the vector.

Throws: Nothing.

Complexity: Constant.

```
21. void resize(size_type new_size);
```

Effects: Inserts or erases elements at the end such that the size becomes n. New elements are default constructed.

Throws: If memory allocation throws, or T's copy constructor throws.

Complexity: Linear to the difference between size() and new_size.

```
22. void resize(size_type new_size, const T & x);
```

Effects: Inserts or erases elements at the end such that the size becomes n. New elements are copy constructed from x.

Throws: If memory allocation throws, or T's copy constructor throws.

Complexity: Linear to the difference between size() and new_size.

```
23. size_type capacity() const;
```

Effects: Number of elements for which memory has been allocated. capacity() is always greater than or equal to size().

Throws: Nothing.

Complexity: Constant.

```
24. void reserve(size_type new_cap);
```

Effects: If n is less than or equal to capacity(), this call has no effect. Otherwise, it is a request for allocation of additional memory. If the request is successful, then capacity() is greater than or equal to n; otherwise, capacity() is unchanged. In either case, size() is unchanged.

Throws: If memory allocation allocation throws or T's copy/move constructor throws.

```
25. void shrink_to_fit();
```

Effects: Tries to deallocate the excess of memory created with previous allocations. The size of the vector is unchanged

Throws: If memory allocation throws, or T's copy/move constructor throws.

Complexity: Linear to size().

```
26. reference front();
```

Requires: !empty()

Effects: Returns a reference to the first element of the container.

Throws: Nothing.

Complexity: Constant.

27.

```
const_reference front() const;
```

Requires: !empty()

Effects: Returns a const reference to the first element of the container.

Throws: Nothing.

Complexity: Constant.

28.

```
reference back();
```

Requires: !empty()

Effects: Returns a reference to the last element of the container.

Throws: Nothing.

Complexity: Constant.

29.

```
const_reference back() const;
```

Requires: !empty()

Effects: Returns a const reference to the last element of the container.

Throws: Nothing.

Complexity: Constant.

30.

```
reference operator[](size_type n);
```

Requires: size() > n.

Effects: Returns a reference to the nth element from the beginning of the container.

Throws: Nothing.

Complexity: Constant.

31.

```
const_reference operator[](size_type n) const;
```

Requires: size() > n.

Effects: Returns a const reference to the nth element from the beginning of the container.

Throws: Nothing.

Complexity: Constant.

32.

```
reference at(size_type n);
```

Requires: `size() > n`.

Effects: Returns a reference to the `n`th element from the beginning of the container.

Throws: `std::range_error` if `n >= size()`

Complexity: Constant.

```
33. const_reference at(size_type n) const;
```

Requires: `size() > n`.

Effects: Returns a const reference to the `n`th element from the beginning of the container.

Throws: `std::range_error` if `n >= size()`

Complexity: Constant.

```
34. T * data();
```

Returns: Allocator pointer such that `[data(),data() + size())` is a valid range. For a non-empty vector, `data() == &front()`.

Throws: Nothing.

Complexity: Constant.

```
35. const T * data() const;
```

Returns: Allocator pointer such that `[data(),data() + size())` is a valid range. For a non-empty vector, `data() == &front()`.

Throws: Nothing.

Complexity: Constant.

```
36. template<class... Args> void emplace_back(Args &&... args);
```

Effects: Inserts an object of type `T` constructed with `std::forward<Args>(args)...` in the end of the vector.

Throws: If memory allocation throws or the in-place constructor throws or `T`'s move constructor throws.

Complexity: Amortized constant time.

```
37. template<class... Args>
    iterator emplace(const_iterator position, Args &&... args);
```

Requires: `position` must be a valid iterator of `*this`.

Effects: Inserts an object of type `T` constructed with `std::forward<Args>(args)...` before `position`

Throws: If memory allocation throws or the in-place constructor throws or `T`'s move constructor/assignment throws.

Complexity: If `position` is `end()`, amortized constant time Linear time otherwise.

```
38. void push_back(const T & x);
```

Effects: Inserts a copy of `x` at the end of the vector.

Throws: If memory allocation throws or T's copy/move constructor throws.

Complexity: Amortized constant time.

```
39. void push_back(T && x);
```

Effects: Constructs a new element in the end of the vector and moves the resources of mx to this new element.

Throws: If memory allocation throws or T's move constructor throws.

Complexity: Amortized constant time.

```
40. iterator insert(const_iterator position, const T & x);
```

Requires: position must be a valid iterator of *this.

Effects: Insert a copy of x before position.

Throws: If memory allocation throws or T's copy/move constructor/assignment throws.

Complexity: If position is end(), amortized constant time Linear time otherwise.

```
41. iterator insert(const_iterator position, T && x);
```

Requires: position must be a valid iterator of *this.

Effects: Insert a new element before position with mx's resources.

Throws: If memory allocation throws.

Complexity: If position is end(), amortized constant time Linear time otherwise.

```
42. iterator insert(const_iterator p, size_type n, const T & x);
```

Requires: p must be a valid iterator of *this.

Effects: Insert n copies of x before pos.

Returns: an iterator to the first inserted element or p if n is 0.

Throws: If memory allocation throws or T's copy constructor throws.

Complexity: Linear to n.

```
43. template<typename InIt>
    iterator insert(const_iterator pos, InIt first, InIt last);
```

Requires: p must be a valid iterator of *this.

Effects: Insert a copy of the [first, last) range before pos.

Returns: an iterator to the first inserted element or pos if first == last.

Throws: If memory allocation throws, T's constructor from a dereferenced InIt throws or T's copy/move constructor/assignment throws.

Complexity: Linear to std::distance [first, last).

```
44. void pop_back();
```

Effects: Removes the last element from the vector.

Throws: Nothing.

Complexity: Constant time.

```
45. iterator erase(const_iterator position);
```

Effects: Erases the element at position pos.

Throws: Nothing.

Complexity: Linear to the elements between pos and the last element. Constant if pos is the last element.

```
46. iterator erase(const_iterator first, const_iterator last);
```

Effects: Erases the elements pointed by [first, last).

Throws: Nothing.

Complexity: Linear to the distance between first and last plus linear to the elements between pos and the last element.

```
47. void swap(vector & x);
```

Effects: Swaps the contents of *this and x.

Throws: Nothing.

Complexity: Constant.

```
48. void clear();
```

Effects: Erases all the elements of the vector.

Throws: Nothing.

Complexity: Linear to the number of elements in the vector.

Class template `stable_vector`

`boost::container::stable_vector`

Synopsis

```
// In header: <boost/container/container_fwd.hpp>

template<typename T, typename Allocator = std::allocator<T> >
class stable_vector {
public:
    // construct/copy/destroy
    stable_vector();
    explicit stable_vector(const allocator_type &);
    explicit stable_vector(size_type);
    stable_vector(size_type, const T &,
                 const allocator_type & = allocator_type());
    template<typename InputIterator>
        stable_vector(InputIterator, InputIterator,
                     const allocator_type & = allocator_type());
    stable_vector(const stable_vector &);
    stable_vector(stable_vector &&);
    stable_vector(const stable_vector &, const allocator_type &);
    stable_vector(stable_vector &&, const allocator_type &);
    stable_vector& operator=(const stable_vector &);
    stable_vector& operator=(stable_vector &&);
    ~stable_vector();

    // public member functions
    void assign(size_type, const T &);
    template<typename InputIterator> void assign(InputIterator, InputIterator);
    allocator_type get_allocator() const;
    const stored_allocator_type & get_stored_allocator() const;
    stored_allocator_type & get_stored_allocator();
    iterator begin();
    const_iterator begin() const;
    iterator end();
    const_iterator end() const;
    reverse_iterator rbegin();
    const_reverse_iterator rbegin() const;
    reverse_iterator rend();
    const_reverse_iterator rend() const;
    const_iterator cbegin() const;
    const_iterator cend() const;
    const_reverse_iterator crbegin() const;
    const_reverse_iterator crend() const;
    bool empty() const;
    size_type size() const;
    size_type max_size() const;
    void resize(size_type);
    void resize(size_type, const T &);
    size_type capacity() const;
    void reserve(size_type);
    void shrink_to_fit();
    reference front();
    const_reference front() const;
    reference back();
    const_reference back() const;
    reference operator[](size_type);
    const_reference operator[](size_type) const;
    reference at(size_type);
    const_reference at(size_type) const;
    template<class... Args> void emplace_back(Args &&...);
    template<class... Args> iterator emplace(const_iterator, Args &&...);
    void push_back(const T &);
    void push_back(T &&);

```

```

iterator insert(const_iterator, const T &);
iterator insert(const_iterator, T &&);
iterator insert(const_iterator, size_type, const T &);
template<typename InputIterator>
    iterator insert(const_iterator, InputIterator, InputIterator);
void pop_back();
iterator erase(const_iterator);
iterator erase(const_iterator, const_iterator);
void swap(stable_vector &);
void clear();
};

```

Description

Originally developed by Joaquin M. Lopez Munoz, [stable_vector](#) is a `std::vector` drop-in replacement implemented as a node container, offering iterator and reference stability.

Here are the details taken from the author's blog ([Introducing stable_vector](#)):

We present [stable_vector](#), a fully STL-compliant stable container that provides most of the features of `std::vector` except element contiguity.

General properties: [stable_vector](#) satisfies all the requirements of a container, a reversible container and a sequence and provides all the optional operations present in `std::vector`. Like `std::vector`, iterators are random access. [stable_vector](#) does not provide element contiguity; in exchange for this absence, the container is stable, i.e. references and iterators to an element of a [stable_vector](#) remain valid as long as the element is not erased, and an iterator that has been assigned the return value of `end()` always remain valid until the destruction of the associated [stable_vector](#).

Operation complexity: The big-O complexities of [stable_vector](#) operations match exactly those of `std::vector`. In general, insertion/deletion is constant time at the end of the sequence and linear elsewhere. Unlike `std::vector`, [stable_vector](#) does not internally perform any `value_type` destruction, copy or assignment operations other than those exactly corresponding to the insertion of new elements or deletion of stored elements, which can sometimes compensate in terms of performance for the extra burden of doing more pointer manipulation and an additional allocation per element.

Exception safety: As [stable_vector](#) does not internally copy elements around, some operations provide stronger exception safety guarantees than in `std::vector`.

`stable_vector` public construct/copy/destroy

1.

```
stable_vector();
```

Effects: Default constructs a [stable_vector](#).

Throws: If `allocator_type`'s default constructor throws.

Complexity: Constant.

2.

```
explicit stable_vector(const allocator_type & al);
```

Effects: Constructs a [stable_vector](#) taking the allocator as parameter.

Throws: Nothing

Complexity: Constant.

3.

```
explicit stable_vector(size_type n);
```

Effects: Constructs a [stable_vector](#) that will use a copy of allocator `a` and inserts `n` default constructed values.

Throws: If allocator_type's default constructor or copy constructor throws or T's default or copy constructor throws.

Complexity: Linear to n.

```
4. stable_vector(size_type n, const T & t,
               const allocator_type & al = allocator_type());
```

Effects: Constructs a `stable_vector` that will use a copy of allocator a and inserts n copies of value.

Throws: If allocator_type's default constructor or copy constructor throws or T's default or copy constructor throws.

Complexity: Linear to n.

```
5. template<typename InputIterator>
   stable_vector(InputIterator first, InputIterator last,
               const allocator_type & al = allocator_type());
```

Effects: Constructs a `stable_vector` that will use a copy of allocator a and inserts a copy of the range [first, last) in the `stable_vector`.

Throws: If allocator_type's default constructor or copy constructor throws or T's constructor taking an dereferenced InIt throws.

Complexity: Linear to the range [first, last).

```
6. stable_vector(const stable_vector & x);
```

Effects: Copy constructs a `stable_vector`.

Postcondition: x == *this.

Complexity: Linear to the elements x contains.

```
7. stable_vector(stable_vector && x);
```

Effects: Move constructor. Moves mx's resources to *this.

Throws: If allocator_type's copy constructor throws.

Complexity: Constant.

```
8. stable_vector(const stable_vector & x, const allocator_type & a);
```

Effects: Copy constructs a `stable_vector` using the specified allocator.

Postcondition: x == *this.

Complexity: Linear to the elements x contains.

```
9. stable_vector(stable_vector && x, const allocator_type & a);
```

Effects: Move constructor using the specified allocator. Moves mx's resources to *this.

Throws: If allocator_type's copy constructor throws.

Complexity: Constant if a == x.get_allocator(), linear otherwise

```
10. stable_vector& operator=(const stable_vector & x);
```

Effects: Makes *this contain the same elements as x.

Postcondition: this->size() == x.size(). *this contains a copy of each of x's elements.

Throws: If memory allocation throws or T's copy constructor throws.

Complexity: Linear to the number of elements in x.

```
11. stable_vector& operator=(stable_vector && x);
```

Effects: Move assignment. All mx's values are transferred to *this.

Postcondition: x.empty(). *this contains a the elements x had before the function.

Throws: If allocator_type's copy constructor throws.

Complexity: Linear.

```
12. ~stable_vector();
```

Effects: Destroys the `stable_vector`. All stored values are destroyed and used memory is deallocated.

Throws: Nothing.

Complexity: Linear to the number of elements.

`stable_vector` public member functions

```
1. void assign(size_type n, const T & t);
```

Effects: Assigns the n copies of val to *this.

Throws: If memory allocation throws or T's copy constructor throws.

Complexity: Linear to n.

```
2. template<typename InputIterator>
   void assign(InputIterator first, InputIterator last);
```

Effects: Assigns the the range [first, last) to *this.

Throws: If memory allocation throws or T's constructor from dereferencing InpIt throws.

Complexity: Linear to n.

```
3. allocator_type get_allocator() const;
```

Effects: Returns a copy of the internal allocator.

Throws: If allocator's copy constructor throws.

Complexity: Constant.

```
4. const stored_allocator_type & get_stored_allocator() const;
```

Effects: Returns a reference to the internal allocator.

Throws: Nothing

Complexity: Constant.

Note: Non-standard extension.

5.

```
stored_allocator_type & get_stored_allocator();
```

Effects: Returns a reference to the internal allocator.

Throws: Nothing

Complexity: Constant.

Note: Non-standard extension.

6.

```
iterator begin();
```

Effects: Returns an iterator to the first element contained in the [stable_vector](#).

Throws: Nothing.

Complexity: Constant.

7.

```
const_iterator begin() const;
```

Effects: Returns a `const_iterator` to the first element contained in the [stable_vector](#).

Throws: Nothing.

Complexity: Constant.

8.

```
iterator end();
```

Effects: Returns an iterator to the end of the [stable_vector](#).

Throws: Nothing.

Complexity: Constant.

9.

```
const_iterator end() const;
```

Effects: Returns a `const_iterator` to the end of the [stable_vector](#).

Throws: Nothing.

Complexity: Constant.

10.

```
reverse_iterator rbegin();
```

Effects: Returns a `reverse_iterator` pointing to the beginning of the reversed [stable_vector](#).

Throws: Nothing.

Complexity: Constant.

11.

```
const_reverse_iterator rbegin() const;
```

Effects: Returns a `const_reverse_iterator` pointing to the beginning of the reversed `stable_vector`.

Throws: Nothing.

Complexity: Constant.

12.

```
reverse_iterator rend();
```

Effects: Returns a `reverse_iterator` pointing to the end of the reversed `stable_vector`.

Throws: Nothing.

Complexity: Constant.

13.

```
const_reverse_iterator rend() const;
```

Effects: Returns a `const_reverse_iterator` pointing to the end of the reversed `stable_vector`.

Throws: Nothing.

Complexity: Constant.

14.

```
const_iterator cbegin() const;
```

Effects: Returns a `const_iterator` to the first element contained in the `stable_vector`.

Throws: Nothing.

Complexity: Constant.

15.

```
const_iterator cend() const;
```

Effects: Returns a `const_iterator` to the end of the `stable_vector`.

Throws: Nothing.

Complexity: Constant.

16.

```
const_reverse_iterator crbegin() const;
```

Effects: Returns a `const_reverse_iterator` pointing to the beginning of the reversed `stable_vector`.

Throws: Nothing.

Complexity: Constant.

17.

```
const_reverse_iterator crend() const;
```

Effects: Returns a `const_reverse_iterator` pointing to the end of the reversed `stable_vector`.

Throws: Nothing.

Complexity: Constant.

```
18. bool empty() const;
```

Effects: Returns true if the `stable_vector` contains no elements.

Throws: Nothing.

Complexity: Constant.

```
19. size_type size() const;
```

Effects: Returns the number of the elements contained in the `stable_vector`.

Throws: Nothing.

Complexity: Constant.

```
20. size_type max_size() const;
```

Effects: Returns the largest possible size of the `stable_vector`.

Throws: Nothing.

Complexity: Constant.

```
21. void resize(size_type n);
```

Effects: Inserts or erases elements at the end such that the size becomes `n`. New elements are default constructed.

Throws: If memory allocation throws, or `T`'s copy constructor throws.

Complexity: Linear to the difference between `size()` and `new_size`.

```
22. void resize(size_type n, const T & t);
```

Effects: Inserts or erases elements at the end such that the size becomes `n`. New elements are copy constructed from `x`.

Throws: If memory allocation throws, or `T`'s copy constructor throws.

Complexity: Linear to the difference between `size()` and `new_size`.

```
23. size_type capacity() const;
```

Effects: Number of elements for which memory has been allocated. `capacity()` is always greater than or equal to `size()`.

Throws: Nothing.

Complexity: Constant.

```
24. void reserve(size_type n);
```

Effects: If `n` is less than or equal to `capacity()`, this call has no effect. Otherwise, it is a request for allocation of additional memory. If the request is successful, then `capacity()` is greater than or equal to `n`; otherwise, `capacity()` is unchanged. In either case, `size()` is unchanged.

Throws: If memory allocation allocation throws.

25. `void shrink_to_fit();`

Effects: Tries to deallocate the excess of memory created with previous allocations. The size of the `stable_vector` is unchanged

Throws: If memory allocation throws.

Complexity: Linear to `size()`.

26. `reference front();`

Requires: `!empty()`

Effects: Returns a reference to the first element of the container.

Throws: Nothing.

Complexity: Constant.

27. `const_reference front() const;`

Requires: `!empty()`

Effects: Returns a const reference to the first element of the container.

Throws: Nothing.

Complexity: Constant.

28. `reference back();`

Requires: `!empty()`

Effects: Returns a reference to the last element of the container.

Throws: Nothing.

Complexity: Constant.

29. `const_reference back() const;`

Requires: `!empty()`

Effects: Returns a const reference to the last element of the container.

Throws: Nothing.

Complexity: Constant.

30. `reference operator[](size_type n);`

Requires: `size() > n`.

Effects: Returns a reference to the `n`th element from the beginning of the container.

Throws: Nothing.

Complexity: Constant.

```
31. const_reference operator[](size_type n) const;
```

Requires: size() > n.

Effects: Returns a const reference to the nth element from the beginning of the container.

Throws: Nothing.

Complexity: Constant.

```
32. reference at(size_type n);
```

Requires: size() > n.

Effects: Returns a reference to the nth element from the beginning of the container.

Throws: std::range_error if n >= size()

Complexity: Constant.

```
33. const_reference at(size_type n) const;
```

Requires: size() > n.

Effects: Returns a const reference to the nth element from the beginning of the container.

Throws: std::range_error if n >= size()

Complexity: Constant.

```
34. template<class... Args> void emplace_back(Args &&... args);
```

Effects: Inserts an object of type T constructed with std::forward<Args>(args)... in the end of the `stable_vector`.

Throws: If memory allocation throws or the in-place constructor throws.

Complexity: Amortized constant time.

```
35. template<class... Args>
    iterator emplace(const_iterator position, Args &&... args);
```

Requires: position must be a valid iterator of *this.

Effects: Inserts an object of type T constructed with std::forward<Args>(args)... before position

Throws: If memory allocation throws or the in-place constructor throws.

Complexity: If position is end(), amortized constant time Linear time otherwise.

```
36. void push_back(const T & x);
```

Effects: Inserts a copy of x at the end of the `stable_vector`.

Throws: If memory allocation throws or T's copy constructor throws.

Complexity: Amortized constant time.

```
37. void push_back(T && x);
```

Effects: Constructs a new element in the end of the `stable_vector` and moves the resources of `mx` to this new element.

Throws: If memory allocation throws.

Complexity: Amortized constant time.

```
38. iterator insert(const_iterator position, const T & x);
```

Requires: `position` must be a valid iterator of `*this`.

Effects: Insert a copy of `x` before `position`.

Returns: An iterator to the inserted element.

Throws: If memory allocation throws or `x`'s copy constructor throws.

Complexity: If `position` is `end()`, amortized constant time Linear time otherwise.

```
39. iterator insert(const_iterator position, T && x);
```

Requires: `position` must be a valid iterator of `*this`.

Effects: Insert a new element before `position` with `mx`'s resources.

Returns: an iterator to the inserted element.

Throws: If memory allocation throws.

Complexity: If `position` is `end()`, amortized constant time Linear time otherwise.

```
40. iterator insert(const_iterator position, size_type n, const T & t);
```

Requires: `pos` must be a valid iterator of `*this`.

Effects: Insert `n` copies of `x` before `position`.

Returns: an iterator to the first inserted element or `position` if `n` is 0.

Throws: If memory allocation throws or `T`'s copy constructor throws.

Complexity: Linear to `n`.

```
41. template<typename InputIterator>
    iterator insert(const_iterator position, InputIterator first,
                  InputIterator last);
```

Requires: `pos` must be a valid iterator of `*this`.

Effects: Insert a copy of the `[first, last)` range before `pos`.

Returns: an iterator to the first inserted element or `position` if `first == last`.

Throws: If memory allocation throws, `T`'s constructor from a dereferenced `InpIt` throws or `T`'s copy constructor throws.

Complexity: Linear to `std::distance [first, last)`.

```
42. void pop_back();
```

Effects: Removes the last element from the `stable_vector`.

Throws: Nothing.

Complexity: Constant time.

```
43. iterator erase(const_iterator position);
```

Effects: Erases the element at position `pos`.

Throws: Nothing.

Complexity: Linear to the elements between `pos` and the last element. Constant if `pos` is the last element.

```
44. iterator erase(const_iterator first, const_iterator last);
```

Effects: Erases the elements pointed by `[first, last)`.

Throws: Nothing.

Complexity: Linear to the distance between `first` and `last` plus linear to the elements between `pos` and the last element.

```
45. void swap(stable_vector & x);
```

Effects: Swaps the contents of `*this` and `x`.

Throws: Nothing.

Complexity: Constant.

```
46. void clear();
```

Effects: Erases all the elements of the `stable_vector`.

Throws: Nothing.

Complexity: Linear to the number of elements in the `stable_vector`.

Class template deque

`boost::container::deque`

Synopsis

```

// In header: <boost/container/container_fwd.hpp>

template<typename T, typename Allocator = std::allocator<T> >
class deque : protected deque_base< T, Allocator > {
public:
    // construct/copy/destroy
    deque();
    explicit deque(const allocator_type &);
    explicit deque(size_type);
    deque(size_type, const value_type &,
          const allocator_type & = allocator_type());
    template<typename InIt>
        deque(InIt, InIt, const allocator_type & = allocator_type());
    deque(const deque &);
    deque(deque &&);
    deque(const deque &, const allocator_type &);
    deque(deque &&, const allocator_type &);
    deque& operator=(const deque &);
    deque& operator=(deque &&);
    ~deque();

    // public member functions
    void assign(size_type, const T &);
    template<typename InIt> void assign(InIt, InIt);
    allocator_type get_allocator() const;
    const stored_allocator_type & get_stored_allocator() const;
    stored_allocator_type & get_stored_allocator();
    iterator begin();
    const_iterator begin() const;
    iterator end();
    const_iterator end() const;
    reverse_iterator rbegin();
    const_reverse_iterator rbegin() const;
    reverse_iterator rend();
    const_reverse_iterator rend() const;
    const_iterator cbegin() const;
    const_iterator cend() const;
    const_reverse_iterator crbegin() const;
    const_reverse_iterator crend() const;
    bool empty() const;
    size_type size() const;
    size_type max_size() const;
    void resize(size_type);
    void resize(size_type, const value_type &);
    void shrink_to_fit();
    reference front();
    const_reference front() const;
    reference back();
    const_reference back() const;
    reference operator[](size_type);
    const_reference operator[](size_type) const;
    reference at(size_type);
    const_reference at(size_type) const;
    template<class... Args> void emplace_front(Args &&...);
    template<class... Args> void emplace_back(Args &&...);
    template<class... Args> iterator emplace(const_iterator, Args &&...);
    void push_front(const T &);
    void push_front(T &&);
    void push_back(const T &);
    void push_back(T &&);

```

```

iterator insert(const_iterator, const T &);
iterator insert(const_iterator, T &&);
iterator insert(const_iterator, size_type, const value_type &);
template<typename InIt> iterator insert(const_iterator, InIt, InIt);
void pop_front();
void pop_back();
iterator erase(const_iterator);
iterator erase(const_iterator, const_iterator);
void swap(deque &);
void clear();
};

```

Description

Deque class

`deque` **public construct/copy/destroy**

1. `deque();`

Effects: Default constructors a deque.

Throws: If `allocator_type`'s default constructor throws.

Complexity: Constant.

2. `explicit deque(const allocator_type & a);`

Effects: Constructs a deque taking the allocator as parameter.

Throws: Nothing

Complexity: Constant.

3. `explicit deque(size_type n);`

Effects: Constructs a deque that will use a copy of allocator `a` and inserts `n` default constructed values.

Throws: If `allocator_type`'s default constructor or copy constructor throws or `T`'s default or copy constructor throws.

Complexity: Linear to `n`.

4. `deque(size_type n, const value_type & value,
const allocator_type & a = allocator_type());`

Effects: Constructs a deque that will use a copy of allocator `a` and inserts `n` copies of `value`.

Throws: If `allocator_type`'s default constructor or copy constructor throws or `T`'s default or copy constructor throws.

Complexity: Linear to `n`.

5. `template<typename InIt>
deque(InIt first, InIt last, const allocator_type & a = allocator_type());`

Effects: Constructs a deque that will use a copy of allocator `a` and inserts a copy of the range `[first, last)` in the deque.

Throws: If `allocator_type`'s default constructor or copy constructor throws or `T`'s constructor taking an dereferenced `InIt` throws.

Complexity: Linear to the range [first, last).

6. `deque(const deque & x);`

Effects: Copy constructs a deque.

Postcondition: $x == *this$.

Complexity: Linear to the elements x contains.

7. `deque(deque && x);`

Effects: Move constructor. Moves mx's resources to *this.

Throws: If allocator_type's copy constructor throws.

Complexity: Constant.

8. `deque(const deque & x, const allocator_type & a);`

Effects: Copy constructs a vector using the specified allocator.

Postcondition: $x == *this$.

Throws: If allocation throws or T's copy constructor throws.

Complexity: Linear to the elements x contains.

9. `deque(deque && mx, const allocator_type & a);`

Effects: Move constructor using the specified allocator. Moves mx's resources to *this if $a == \text{allocator_type}()$. Otherwise copies values from x to *this.

Throws: If allocation or T's copy constructor throws.

Complexity: Constant if $a == \text{mx.get_allocator}()$, linear otherwise.

10. `deque& operator=(const deque & x);`

Effects: Makes *this contain the same elements as x.

Postcondition: $\text{this->size}() == x.size()$. *this contains a copy of each of x's elements.

Throws: If memory allocation throws or T's copy constructor throws.

Complexity: Linear to the number of elements in x.

11. `deque& operator=(deque && x);`

Effects: Move assignment. All mx's values are transferred to *this.

Postcondition: $x.empty()$. *this contains a the elements x had before the function.

Throws: If allocator_type's copy constructor throws.

Complexity: Linear.

```
12 ~deque();
```

Effects: Destroys the deque. All stored values are destroyed and used memory is deallocated.

Throws: Nothing.

Complexity: Linear to the number of elements.

deque public member functions

```
1. void assign(size_type n, const T & val);
```

Effects: Assigns the n copies of val to *this.

Throws: If memory allocation throws or T's copy constructor throws.

Complexity: Linear to n.

```
2. template<typename InIt> void assign(InIt first, InIt last);
```

Effects: Assigns the the range [first, last) to *this.

Throws: If memory allocation throws or T's constructor from dereferencing InIt throws.

Complexity: Linear to n.

```
3. allocator_type get_allocator() const;
```

Effects: Returns a copy of the internal allocator.

Throws: If allocator's copy constructor throws.

Complexity: Constant.

```
4. const stored_allocator_type & get_stored_allocator() const;
```

Effects: Returns a reference to the internal allocator.

Throws: Nothing

Complexity: Constant.

Note: Non-standard extension.

```
5. stored_allocator_type & get_stored_allocator();
```

Effects: Returns a reference to the internal allocator.

Throws: Nothing

Complexity: Constant.

Note: Non-standard extension.

```
6. iterator begin();
```

Effects: Returns an iterator to the first element contained in the deque.

Throws: Nothing.

Complexity: Constant.

7.

```
const_iterator begin() const;
```

Effects: Returns a `const_iterator` to the first element contained in the deque.

Throws: Nothing.

Complexity: Constant.

8.

```
iterator end();
```

Effects: Returns an iterator to the end of the deque.

Throws: Nothing.

Complexity: Constant.

9.

```
const_iterator end() const;
```

Effects: Returns a `const_iterator` to the end of the deque.

Throws: Nothing.

Complexity: Constant.

10.

```
reverse_iterator rbegin();
```

Effects: Returns a `reverse_iterator` pointing to the beginning of the reversed deque.

Throws: Nothing.

Complexity: Constant.

11.

```
const_reverse_iterator rbegin() const;
```

Effects: Returns a `const_reverse_iterator` pointing to the beginning of the reversed deque.

Throws: Nothing.

Complexity: Constant.

12.

```
reverse_iterator rend();
```

Effects: Returns a `reverse_iterator` pointing to the end of the reversed deque.

Throws: Nothing.

Complexity: Constant.

13.

```
const_reverse_iterator rend() const;
```

Effects: Returns a `const_reverse_iterator` pointing to the end of the reversed deque.

Throws: Nothing.

Complexity: Constant.

14.

```
const_iterator cbegin() const;
```

Effects: Returns a `const_iterator` to the first element contained in the deque.

Throws: Nothing.

Complexity: Constant.

15.

```
const_iterator cend() const;
```

Effects: Returns a `const_iterator` to the end of the deque.

Throws: Nothing.

Complexity: Constant.

16.

```
const_reverse_iterator crbegin() const;
```

Effects: Returns a `const_reverse_iterator` pointing to the beginning of the reversed deque.

Throws: Nothing.

Complexity: Constant.

17.

```
const_reverse_iterator crend() const;
```

Effects: Returns a `const_reverse_iterator` pointing to the end of the reversed deque.

Throws: Nothing.

Complexity: Constant.

18.

```
bool empty() const;
```

Effects: Returns true if the deque contains no elements.

Throws: Nothing.

Complexity: Constant.

19.

```
size_type size() const;
```

Effects: Returns the number of the elements contained in the deque.

Throws: Nothing.

Complexity: Constant.

20.

```
size_type max_size() const;
```

Effects: Returns the largest possible size of the deque.

Throws: Nothing.

Complexity: Constant.

21.

```
void resize(size_type new_size);
```

Effects: Inserts or erases elements at the end such that the size becomes n. New elements are default constructed.

Throws: If memory allocation throws, or T's copy constructor throws.

Complexity: Linear to the difference between size() and new_size.

22.

```
void resize(size_type new_size, const value_type & x);
```

Effects: Inserts or erases elements at the end such that the size becomes n. New elements are copy constructed from x.

Throws: If memory allocation throws, or T's copy constructor throws.

Complexity: Linear to the difference between size() and new_size.

23.

```
void shrink_to_fit();
```

Effects: Tries to deallocate the excess of memory created with previous allocations. The size of the deque is unchanged

Throws: If memory allocation throws.

Complexity: Constant.

24.

```
reference front();
```

Requires: !empty()

Effects: Returns a reference to the first element of the container.

Throws: Nothing.

Complexity: Constant.

25.

```
const_reference front() const;
```

Requires: !empty()

Effects: Returns a const reference to the first element from the beginning of the container.

Throws: Nothing.

Complexity: Constant.

26.

```
reference back();
```

Requires: !empty()

Effects: Returns a reference to the last element of the container.

Throws: Nothing.

Complexity: Constant.

27. `const_reference back() const;`

Requires: !empty()

Effects: Returns a const reference to the last element of the container.

Throws: Nothing.

Complexity: Constant.

28. `reference operator[](size_type n);`

Requires: size() > n.

Effects: Returns a reference to the nth element from the beginning of the container.

Throws: Nothing.

Complexity: Constant.

29. `const_reference operator[](size_type n) const;`

Requires: size() > n.

Effects: Returns a const reference to the nth element from the beginning of the container.

Throws: Nothing.

Complexity: Constant.

30. `reference at(size_type n);`

Requires: size() > n.

Effects: Returns a reference to the nth element from the beginning of the container.

Throws: std::range_error if n >= size()

Complexity: Constant.

31. `const_reference at(size_type n) const;`

Requires: size() > n.

Effects: Returns a const reference to the nth element from the beginning of the container.

Throws: std::range_error if n >= size()

Complexity: Constant.

32. `template<class... Args> void emplace_front(Args &&... args);`

Effects: Inserts an object of type T constructed with std::forward<Args>(args)... in the beginning of the deque.

Throws: If memory allocation throws or the in-place constructor throws.

Complexity: Amortized constant time

```
33. template<class... Args> void emplace_back(Args &&... args);
```

Effects: Inserts an object of type T constructed with `std::forward<Args>(args)...` in the end of the deque.

Throws: If memory allocation throws or the in-place constructor throws.

Complexity: Amortized constant time

```
34. template<class... Args> iterator emplace(const_iterator p, Args &&... args);
```

Requires: position must be a valid iterator of *this.

Effects: Inserts an object of type T constructed with `std::forward<Args>(args)...` before position

Throws: If memory allocation throws or the in-place constructor throws.

Complexity: If position is `end()`, amortized constant time Linear time otherwise.

```
35. void push_front(const T & x);
```

Effects: Inserts a copy of x at the front of the deque.

Throws: If memory allocation throws or T's copy constructor throws.

Complexity: Amortized constant time.

```
36. void push_front(T && x);
```

Effects: Constructs a new element in the front of the deque and moves the resources of mx to this new element.

Throws: If memory allocation throws.

Complexity: Amortized constant time.

```
37. void push_back(const T & x);
```

Effects: Inserts a copy of x at the end of the deque.

Throws: If memory allocation throws or T's copy constructor throws.

Complexity: Amortized constant time.

```
38. void push_back(T && x);
```

Effects: Constructs a new element in the end of the deque and moves the resources of mx to this new element.

Throws: If memory allocation throws.

Complexity: Amortized constant time.

```
39. iterator insert(const_iterator position, const T & x);
```

Requires: position must be a valid iterator of *this.

Effects: Insert a copy of x before position.

Returns: an iterator to the inserted element.

Throws: If memory allocation throws or x's copy constructor throws.

Complexity: If position is end(), amortized constant time Linear time otherwise.

```
40. iterator insert(const_iterator position, T && x);
```

Requires: position must be a valid iterator of *this.

Effects: Insert a new element before position with mx's resources.

Returns: an iterator to the inserted element.

Throws: If memory allocation throws.

Complexity: If position is end(), amortized constant time Linear time otherwise.

```
41. iterator insert(const_iterator pos, size_type n, const value_type & x);
```

Requires: pos must be a valid iterator of *this.

Effects: Insert n copies of x before pos.

Returns: an iterator to the first inserted element or pos if n is 0.

Throws: If memory allocation throws or T's copy constructor throws.

Complexity: Linear to n.

```
42. template<typename InIt>
    iterator insert(const_iterator pos, InIt first, InIt last);
```

Requires: pos must be a valid iterator of *this.

Effects: Insert a copy of the [first, last) range before pos.

Returns: an iterator to the first inserted element or pos if first == last.

Throws: If memory allocation throws, T's constructor from a dereferenced InIt throws or T's copy constructor throws.

Complexity: Linear to std::distance [first, last).

```
43. void pop_front();
```

Effects: Removes the first element from the deque.

Throws: Nothing.

Complexity: Constant time.

```
44. void pop_back();
```

Effects: Removes the last element from the deque.

Throws: Nothing.

Complexity: Constant time.

```
45. iterator erase(const_iterator pos);
```

Effects: Erases the element at position pos.

Throws: Nothing.

Complexity: Linear to the elements between pos and the last element (if pos is near the end) or the first element if(pos is near the beginning). Constant if pos is the first or the last element.

```
46. iterator erase(const_iterator first, const_iterator last);
```

Effects: Erases the elements pointed by [first, last).

Throws: Nothing.

Complexity: Linear to the distance between first and last plus the elements between pos and the last element (if pos is near the end) or the first element if(pos is near the beginning).

```
47. void swap(deque & x);
```

Effects: Swaps the contents of *this and x.

Throws: Nothing.

Complexity: Constant.

```
48. void clear();
```

Effects: Erases all the elements of the deque.

Throws: Nothing.

Complexity: Linear to the number of elements in the deque.

Class template list

boost::container::list

Synopsis

```
// In header: <boost/container/container_fwd.hpp>

template<typename T, typename Allocator = std::allocator<T> >
class list {
public:
    // construct/copy/destroy
    list();
    explicit list(const allocator_type &);
    explicit list(size_type);
    list(size_type, const T &, const Allocator & = Allocator());
    list(const list &);
    list(list &&);
    list(const list &, const allocator_type &);
    list(list &&, const allocator_type &);
    template<typename InpIt> list(InpIt, InpIt, const Allocator & = Allocator());
    list& operator=(const list &);
    list& operator=(list &&);
    ~list();

    // public member functions
    void assign(size_type, const T &);
    template<typename InpIt> void assign(InpIt, InpIt);
    allocator_type get_allocator() const;
    stored_allocator_type & get_stored_allocator();
    const stored_allocator_type & get_stored_allocator() const;
    iterator begin();
    const_iterator begin() const;
    iterator end();
    const_iterator end() const;
    reverse_iterator rbegin();
    const_reverse_iterator rbegin() const;
    reverse_iterator rend();
    const_reverse_iterator rend() const;
    const_iterator cbegin() const;
    const_iterator cend() const;
    const_reverse_iterator crbegin() const;
    const_reverse_iterator crend() const;
    bool empty() const;
    size_type size() const;
    size_type max_size() const;
    void resize(size_type);
    void resize(size_type, const T &);
    reference front();
    const_reference front() const;
    reference back();
    const_reference back() const;
    template<class... Args> void emplace_back(Args &&...);
    template<class... Args> void emplace_front(Args &&...);
    template<class... Args> iterator emplace(const_iterator, Args &&...);
    void push_front(const T &);
    void push_front(T &&);
    void push_back(const T &);
    void push_back(T &&);
    iterator insert(const_iterator, const T &);
    iterator insert(const_iterator, T &&);
    iterator insert(const_iterator, size_type, const T &);
    template<typename InpIt> iterator insert(const_iterator, InpIt, InpIt);
    void pop_front();
    void pop_back();
    iterator erase(const_iterator);
```

```

iterator erase(const_iterator, const_iterator);
void swap(list &);
void clear();
void splice(const_iterator, list &);
void splice(const_iterator, list &&);
void splice(const_iterator, list &, const_iterator);
void splice(const_iterator, list &&, const_iterator);
void splice(const_iterator, list &, const_iterator, const_iterator);
void splice(const_iterator, list &&, const_iterator, const_iterator);
void splice(const_iterator, list &, const_iterator, const_iterator,
            size_type);
void splice(const_iterator, list &&, const_iterator, const_iterator,
            size_type);
void remove(const T &);
template<typename Pred> void remove_if(Pred);
void unique();
template<typename BinaryPredicate> void unique(BinaryPredicate);
void merge(list &);
void merge(list &&);
template<typename StrictWeakOrdering>
void merge(list &, const StrictWeakOrdering &);
template<typename StrictWeakOrdering>
void merge(list &&, StrictWeakOrdering);
void sort();
template<typename StrictWeakOrdering> void sort(StrictWeakOrdering);
void reverse();
};

```

Description

A list is a doubly linked list. That is, it is a Sequence that supports both forward and backward traversal, and (amortized) constant time insertion and removal of elements at the beginning or the end, or in the middle. Lists have the important property that insertion and splicing do not invalidate iterators to list elements, and that even removal invalidates only the iterators that point to the elements that are removed. The ordering of iterators may be changed (that is, `list<T>::iterator` might have a different predecessor or successor after a list operation than it did before), but the iterators themselves will not be invalidated or made to point to different elements unless that invalidation or mutation is explicit.

list public construct/copy/destroy

1. `list();`

Effects: Default constructs a list.

Throws: If `allocator_type`'s default constructor throws.

Complexity: Constant.

2. `explicit list(const allocator_type & a);`

Effects: Constructs a list taking the allocator as parameter.

Throws: Nothing

Complexity: Constant.

3. `explicit list(size_type n);`

Effects: Constructs a list that will use a copy of allocator `a` and inserts `n` copies of value.

Throws: If allocator_type's default constructor or copy constructor throws or T's default or copy constructor throws.

Complexity: Linear to n.

```
4. list(size_type n, const T & value, const Allocator & a = Allocator());
```

Effects: Constructs a list that will use a copy of allocator a and inserts n copies of value.

Throws: If allocator_type's default constructor or copy constructor throws or T's default or copy constructor throws.

Complexity: Linear to n.

```
5. list(const list & x);
```

Effects: Copy constructs a list.

Postcondition: x == *this.

Throws: If allocator_type's default constructor or copy constructor throws.

Complexity: Linear to the elements x contains.

```
6. list(list && x);
```

Effects: Move constructor. Moves mx's resources to *this.

Throws: If allocator_type's copy constructor throws.

Complexity: Constant.

```
7. list(const list & x, const allocator_type & a);
```

Effects: Copy constructs a list using the specified allocator.

Postcondition: x == *this.

Throws: If allocator_type's default constructor or copy constructor throws.

Complexity: Linear to the elements x contains.

```
8. list(list && x, const allocator_type & a);
```

Effects: Move constructor using the specified allocator. Moves mx's resources to *this.

Throws: If allocation or value_type's copy constructor throws.

Complexity: Constant if a == x.get_allocator(), linear otherwise.

```
9. template<typename InpIt>
   list(InpIt first, InpIt last, const Allocator & a = Allocator());
```

Effects: Constructs a list that will use a copy of allocator a and inserts a copy of the range [first, last) in the list.

Throws: If allocator_type's default constructor or copy constructor throws or T's constructor taking an dereferenced InIt throws.

Complexity: Linear to the range [first, last).

```
10. list& operator=(const list & x);
```

Effects: Makes *this contain the same elements as x.

Postcondition: this->size() == x.size(). *this contains a copy of each of x's elements.

Throws: If memory allocation throws or T's copy constructor throws.

Complexity: Linear to the number of elements in x.

```
11. list& operator=(list && x);
```

Effects: Move assignment. All mx's values are transferred to *this.

Postcondition: x.empty(). *this contains a the elements x had before the function.

Throws: If allocator_type's copy constructor throws.

Complexity: Constant.

```
12. ~list();
```

Effects: Destroys the list. All stored values are destroyed and used memory is deallocated.

Throws: Nothing.

Complexity: Linear to the number of elements.

list public member functions

```
1. void assign(size_type n, const T & val);
```

Effects: Assigns the n copies of val to *this.

Throws: If memory allocation throws or T's copy constructor throws.

Complexity: Linear to n.

```
2. template<typename InpIt> void assign(InpIt first, InpIt last);
```

Effects: Assigns the the range [first, last) to *this.

Throws: If memory allocation throws or T's constructor from dereferencing InpIt throws.

Complexity: Linear to n.

```
3. allocator_type get_allocator() const;
```

Effects: Returns a copy of the internal allocator.

Throws: If allocator's copy constructor throws.

Complexity: Constant.

```
4. stored_allocator_type & get_stored_allocator();
```

Effects: Returns a reference to the internal allocator.

Throws: Nothing

Complexity: Constant.

Note: Non-standard extension.

5.

```
const stored_allocator_type & get_stored_allocator() const;
```

Effects: Returns a reference to the internal allocator.

Throws: Nothing

Complexity: Constant.

Note: Non-standard extension.

6.

```
iterator begin();
```

Effects: Returns an iterator to the first element contained in the list.

Throws: Nothing.

Complexity: Constant.

7.

```
const_iterator begin() const;
```

Effects: Returns a const_iterator to the first element contained in the list.

Throws: Nothing.

Complexity: Constant.

8.

```
iterator end();
```

Effects: Returns an iterator to the end of the list.

Throws: Nothing.

Complexity: Constant.

9.

```
const_iterator end() const;
```

Effects: Returns a const_iterator to the end of the list.

Throws: Nothing.

Complexity: Constant.

10.

```
reverse_iterator rbegin();
```

Effects: Returns a reverse_iterator pointing to the beginning of the reversed list.

Throws: Nothing.

Complexity: Constant.

11. `const_reverse_iterator rbegin() const;`

Effects: Returns a `const_reverse_iterator` pointing to the beginning of the reversed list.

Throws: Nothing.

Complexity: Constant.

12. `reverse_iterator rend();`

Effects: Returns a `reverse_iterator` pointing to the end of the reversed list.

Throws: Nothing.

Complexity: Constant.

13. `const_reverse_iterator rend() const;`

Effects: Returns a `const_reverse_iterator` pointing to the end of the reversed list.

Throws: Nothing.

Complexity: Constant.

14. `const_iterator cbegin() const;`

Effects: Returns a `const_iterator` to the first element contained in the list.

Throws: Nothing.

Complexity: Constant.

15. `const_iterator cend() const;`

Effects: Returns a `const_iterator` to the end of the list.

Throws: Nothing.

Complexity: Constant.

16. `const_reverse_iterator crbegin() const;`

Effects: Returns a `const_reverse_iterator` pointing to the beginning of the reversed list.

Throws: Nothing.

Complexity: Constant.

17. `const_reverse_iterator crend() const;`

Effects: Returns a `const_reverse_iterator` pointing to the end of the reversed list.

Throws: Nothing.

Complexity: Constant.

```
18. bool empty() const;
```

Effects: Returns true if the list contains no elements.

Throws: Nothing.

Complexity: Constant.

```
19. size_type size() const;
```

Effects: Returns the number of the elements contained in the list.

Throws: Nothing.

Complexity: Constant.

```
20. size_type max_size() const;
```

Effects: Returns the largest possible size of the list.

Throws: Nothing.

Complexity: Constant.

```
21. void resize(size_type new_size);
```

Effects: Inserts or erases elements at the end such that the size becomes n. New elements are default constructed.

Throws: If memory allocation throws, or T's copy constructor throws.

Complexity: Linear to the difference between size() and new_size.

```
22. void resize(size_type new_size, const T & x);
```

Effects: Inserts or erases elements at the end such that the size becomes n. New elements are copy constructed from x.

Throws: If memory allocation throws, or T's copy constructor throws.

Complexity: Linear to the difference between size() and new_size.

```
23. reference front();
```

Requires: !empty()

Effects: Returns a reference to the first element from the beginning of the container.

Throws: Nothing.

Complexity: Constant.

```
24. const_reference front() const;
```

Requires: !empty()

Effects: Returns a const reference to the first element from the beginning of the container.

Throws: Nothing.

Complexity: Constant.

```
25. reference back();
```

Requires: !empty()

Effects: Returns a reference to the first element from the beginning of the container.

Throws: Nothing.

Complexity: Constant.

```
26. const_reference back() const;
```

Requires: !empty()

Effects: Returns a const reference to the first element from the beginning of the container.

Throws: Nothing.

Complexity: Constant.

```
27. template<class... Args> void emplace_back(Args &&... args);
```

Effects: Inserts an object of type T constructed with std::forward<Args>(args)... in the end of the list.

Throws: If memory allocation throws or T's in-place constructor throws.

Complexity: Constant

```
28. template<class... Args> void emplace_front(Args &&... args);
```

Effects: Inserts an object of type T constructed with std::forward<Args>(args)... in the beginning of the list.

Throws: If memory allocation throws or T's in-place constructor throws.

Complexity: Constant

```
29. template<class... Args> iterator emplace(const_iterator p, Args &&... args);
```

Effects: Inserts an object of type T constructed with std::forward<Args>(args)... before p.

Throws: If memory allocation throws or T's in-place constructor throws.

Complexity: Constant

```
30. void push_front(const T & x);
```

Effects: Inserts a copy of x at the beginning of the list.

Throws: If memory allocation throws or T's copy constructor throws.

Complexity: Amortized constant time.

```
31. void push_front(T && x);
```

Effects: Constructs a new element in the beginning of the list and moves the resources of `mx` to this new element.

Throws: If memory allocation throws.

Complexity: Amortized constant time.

```
32. void push_back(const T & x);
```

Effects: Inserts a copy of `x` at the end of the list.

Throws: If memory allocation throws or `T`'s copy constructor throws.

Complexity: Amortized constant time.

```
33. void push_back(T && x);
```

Effects: Constructs a new element in the end of the list and moves the resources of `mx` to this new element.

Throws: If memory allocation throws.

Complexity: Amortized constant time.

```
34. iterator insert(const_iterator position, const T & x);
```

Requires: `position` must be a valid iterator of `*this`.

Effects: Insert a copy of `x` before `position`.

Returns: an iterator to the inserted element.

Throws: If memory allocation throws or `x`'s copy constructor throws.

Complexity: Amortized constant time.

```
35. iterator insert(const_iterator position, T && x);
```

Requires: `position` must be a valid iterator of `*this`.

Effects: Insert a new element before `position` with `mx`'s resources.

Returns: an iterator to the inserted element.

Throws: If memory allocation throws.

Complexity: Amortized constant time.

```
36. iterator insert(const_iterator p, size_type n, const T & x);
```

Requires: `p` must be a valid iterator of `*this`.

Effects: Inserts `n` copies of `x` before `p`.

Returns: an iterator to the first inserted element or `p` if `n` is 0.

Throws: If memory allocation throws or `T`'s copy constructor throws.

Complexity: Linear to n.

```
37. template<typename InpIt>
    iterator insert(const_iterator p, InpIt first, InpIt last);
```

Requires: p must be a valid iterator of *this.

Effects: Insert a copy of the [first, last) range before p.

Returns: an iterator to the first inserted element or p if first == last.

Throws: If memory allocation throws, T's constructor from a dereferenced InpIt throws.

Complexity: Linear to std::distance [first, last).

```
38. void pop_front();
```

Effects: Removes the first element from the list.

Throws: Nothing.

Complexity: Amortized constant time.

```
39. void pop_back();
```

Effects: Removes the last element from the list.

Throws: Nothing.

Complexity: Amortized constant time.

```
40. iterator erase(const_iterator p);
```

Requires: p must be a valid iterator of *this.

Effects: Erases the element at p.

Throws: Nothing.

Complexity: Amortized constant time.

```
41. iterator erase(const_iterator first, const_iterator last);
```

Requires: first and last must be valid iterator to elements in *this.

Effects: Erases the elements pointed by [first, last).

Throws: Nothing.

Complexity: Linear to the distance between first and last.

```
42. void swap(list & x);
```

Effects: Swaps the contents of *this and x.

Throws: Nothing.

Complexity: Constant.

```
43. void clear();
```

Effects: Erases all the elements of the list.

Throws: Nothing.

Complexity: Linear to the number of elements in the list.

```
44. void splice(const_iterator p, list & x);
```

Requires: p must point to an element contained by the list. x != *this. this' allocator and x's allocator shall compare equal

Effects: Transfers all the elements of list x to this list, before the the element pointed by p. No destructors or copy constructors are called.

Throws: Nothing

Complexity: Constant.

Note: Iterators of values obtained from list x now point to elements of this list. Iterators of this list and all the references are not invalidated.

```
45. void splice(const_iterator p, list && x);
```

Requires: p must point to an element contained by the list. x != *this. this' allocator and x's allocator shall compare equal

Effects: Transfers all the elements of list x to this list, before the the element pointed by p. No destructors or copy constructors are called.

Throws: Nothing

Complexity: Constant.

Note: Iterators of values obtained from list x now point to elements of this list. Iterators of this list and all the references are not invalidated.

```
46. void splice(const_iterator p, list & x, const_iterator i);
```

Requires: p must point to an element contained by this list. i must point to an element contained in list x. this' allocator and x's allocator shall compare equal

Effects: Transfers the value pointed by i, from list x to this list, before the the element pointed by p. No destructors or copy constructors are called. If p == i or p == ++i, this function is a null operation.

Throws: Nothing

Complexity: Constant.

Note: Iterators of values obtained from list x now point to elements of this list. Iterators of this list and all the references are not invalidated.

```
47. void splice(const_iterator p, list && x, const_iterator i);
```

Requires: p must point to an element contained by this list. i must point to an element contained in list x. this' allocator and x's allocator shall compare equal.

Effects: Transfers the value pointed by `i`, from list `x` to this list, before the the element pointed by `p`. No destructors or copy constructors are called. If `p == i` or `p == ++i`, this function is a null operation.

Throws: Nothing

Complexity: Constant.

Note: Iterators of values obtained from list `x` now point to elements of this list. Iterators of this list and all the references are not invalidated.

```
48. void splice(const_iterator p, list & x, const_iterator first,
            const_iterator last);
```

Requires: `p` must point to an element contained by this list. `first` and `last` must point to elements contained in list `x`. this' allocator and `x`'s allocator shall compare equal

Effects: Transfers the range pointed by `first` and `last` from list `x` to this list, before the the element pointed by `p`. No destructors or copy constructors are called.

Throws: Nothing

Complexity: Linear to the number of elements transferred.

Note: Iterators of values obtained from list `x` now point to elements of this list. Iterators of this list and all the references are not invalidated.

```
49. void splice(const_iterator p, list && x, const_iterator first,
            const_iterator last);
```

Requires: `p` must point to an element contained by this list. `first` and `last` must point to elements contained in list `x`. this' allocator and `x`'s allocator shall compare equal.

Effects: Transfers the range pointed by `first` and `last` from list `x` to this list, before the the element pointed by `p`. No destructors or copy constructors are called.

Throws: Nothing

Complexity: Linear to the number of elements transferred.

Note: Iterators of values obtained from list `x` now point to elements of this list. Iterators of this list and all the references are not invalidated.

```
50. void splice(const_iterator p, list & x, const_iterator first,
            const_iterator last, size_type n);
```

Requires: `p` must point to an element contained by this list. `first` and `last` must point to elements contained in list `x`. `n == std::distance(first, last)`. this' allocator and `x`'s allocator shall compare equal

Effects: Transfers the range pointed by `first` and `last` from list `x` to this list, before the the element pointed by `p`. No destructors or copy constructors are called.

Throws: Nothing

Complexity: Constant.

Note: Iterators of values obtained from list `x` now point to elements of this list. Iterators of this list and all the references are not invalidated.

Note: Non-standard extension

51.

```
void splice(const_iterator p, list && x, const_iterator first,
           const_iterator last, size_type n);
```

Requires: p must point to an element contained by this list. first and last must point to elements contained in list x. n == std::distance(first, last). this' allocator and x's allocator shall compare equal

Effects: Transfers the range pointed by first and last from list x to this list, before the the element pointed by p. No destructors or copy constructors are called.

Throws: Nothing

Complexity: Constant.

Note: Iterators of values obtained from list x now point to elements of this list. Iterators of this list and all the references are not invalidated.

Note: Non-standard extension

52.

```
void remove(const T & value);
```

Effects: Removes all the elements that compare equal to value.

Throws: If comparison throws.

Complexity: Linear time. It performs exactly size() comparisons for equality.

Note: The relative order of elements that are not removed is unchanged, and iterators to elements that are not removed remain valid.

53.

```
template<typename Pred> void remove_if(Pred pred);
```

Effects: Removes all the elements for which a specified predicate is satisfied.

Throws: If pred throws.

Complexity: Linear time. It performs exactly size() calls to the predicate.

Note: The relative order of elements that are not removed is unchanged, and iterators to elements that are not removed remain valid.

54.

```
void unique();
```

Effects: Removes adjacent duplicate elements or adjacent elements that are equal from the list.

Throws: If comparison throws.

Complexity: Linear time (size()-1 comparisons equality comparisons).

Note: The relative order of elements that are not removed is unchanged, and iterators to elements that are not removed remain valid.

55.

```
template<typename BinaryPredicate> void unique(BinaryPredicate binary_pred);
```

Effects: Removes adjacent duplicate elements or adjacent elements that satisfy some binary predicate from the list.

Throws: If pred throws.

Complexity: Linear time ($\text{size}()-1$ comparisons calls to `pred()`).

Note: The relative order of elements that are not removed is unchanged, and iterators to elements that are not removed remain valid.

```
56. void merge(list & x);
```

Requires: The lists `x` and `*this` must be distinct.

Effects: This function removes all of `x`'s elements and inserts them in order into `*this` according to `std::less<value_type>`. The merge is stable; that is, if an element from `*this` is equivalent to one from `x`, then the element from `*this` will precede the one from `x`.

Throws: If comparison throws.

Complexity: This function is linear time: it performs at most $\text{size}() + x.\text{size}() - 1$ comparisons.

```
57. void merge(list && x);
```

Requires: The lists `x` and `*this` must be distinct.

Effects: This function removes all of `x`'s elements and inserts them in order into `*this` according to `std::less<value_type>`. The merge is stable; that is, if an element from `*this` is equivalent to one from `x`, then the element from `*this` will precede the one from `x`.

Throws: If comparison throws.

Complexity: This function is linear time: it performs at most $\text{size}() + x.\text{size}() - 1$ comparisons.

```
58. template<typename StrictWeakOrdering>
    void merge(list & x, const StrictWeakOrdering & comp);
```

Requires: `p` must be a comparison function that induces a strict weak ordering and both `*this` and `x` must be sorted according to that ordering. The lists `x` and `*this` must be distinct.

Effects: This function removes all of `x`'s elements and inserts them in order into `*this`. The merge is stable; that is, if an element from `*this` is equivalent to one from `x`, then the element from `*this` will precede the one from `x`.

Throws: If `comp` throws.

Complexity: This function is linear time: it performs at most $\text{size}() + x.\text{size}() - 1$ comparisons.

Note: Iterators and references to `*this` are not invalidated.

```
59. template<typename StrictWeakOrdering>
    void merge(list && x, StrictWeakOrdering comp);
```

Requires: `p` must be a comparison function that induces a strict weak ordering and both `*this` and `x` must be sorted according to that ordering. The lists `x` and `*this` must be distinct.

Effects: This function removes all of `x`'s elements and inserts them in order into `*this`. The merge is stable; that is, if an element from `*this` is equivalent to one from `x`, then the element from `*this` will precede the one from `x`.

Throws: If `comp` throws.

Complexity: This function is linear time: it performs at most $\text{size}() + x.\text{size}() - 1$ comparisons.

Note: Iterators and references to `*this` are not invalidated.

```
60. void sort();
```

Effects: This function sorts the list `*this` according to `std::less<value_type>`. The sort is stable, that is, the relative order of equivalent elements is preserved.

Throws: If comparison throws.

Notes: Iterators and references are not invalidated.

Complexity: The number of comparisons is approximately $N \log N$, where N is the list's size.

```
61. template<typename StrictWeakOrdering> void sort(StrictWeakOrdering comp);
```

Effects: This function sorts the list `*this` according to `std::less<value_type>`. The sort is stable, that is, the relative order of equivalent elements is preserved.

Throws: If `comp` throws.

Notes: Iterators and references are not invalidated.

Complexity: The number of comparisons is approximately $N \log N$, where N is the list's size.

```
62. void reverse();
```

Effects: Reverses the order of elements in the list.

Throws: Nothing.

Complexity: This function is linear time.

Note: Iterators and references are not invalidated

Class template `slist`

`boost::container::slist`

Synopsis

```
// In header: <boost/container/container_fwd.hpp>

template<typename T, typename Allocator = std::allocator<T> >
class slist {
public:
    // construct/copy/destroy
    slist();
    explicit slist(const allocator_type &);
    explicit slist(size_type);
    explicit slist(size_type, const value_type &,
                  const allocator_type & = allocator_type());
    template<typename InpIt>
        slist(InpIt, InpIt, const allocator_type & = allocator_type());
    slist(const slist &);
    slist(slist &&);
    slist(const slist &, const allocator_type &);
    slist(slist &&, const allocator_type &);
    slist& operator=(const slist &);
    slist& operator=(slist &&);
    ~slist();

    // public member functions
    void assign(size_type, const T &);
    template<typename InpIt> void assign(InpIt, InpIt);
    allocator_type get_allocator() const;
    stored_allocator_type & get_stored_allocator();
    const stored_allocator_type & get_stored_allocator() const;
    iterator before_begin();
    const_iterator before_begin() const;
    iterator begin();
    const_iterator begin() const;
    iterator end();
    const_iterator end() const;
    const_iterator cbefore_begin() const;
    const_iterator cbegin() const;
    const_iterator cend() const;
    iterator previous(iterator);
    const_iterator previous(const_iterator);
    bool empty() const;
    size_type size() const;
    size_type max_size() const;
    void resize(size_type);
    void resize(size_type, const T &);
    reference front();
    const_reference front() const;
    template<class... Args> void emplace_front(Args &&...);
    template<class... Args> iterator emplace_after(const_iterator, Args &&...);
    void push_front(const T &);
    void push_front(T &&);
    iterator insert_after(const_iterator, const T &);
    iterator insert_after(const_iterator, T &&);
    iterator insert_after(const_iterator, size_type, const value_type &);
    template<typename InpIt> iterator insert_after(const_iterator, InpIt, InpIt);
    void pop_front();
    iterator erase_after(const_iterator);
    iterator erase_after(const_iterator, const_iterator);
    void swap(slist &);
    void clear();
    void splice_after(const_iterator, slist &);
    void splice_after(const_iterator, slist &&);
```

```

void splice_after(const_iterator, slist &, const_iterator);
void splice_after(const_iterator, slist &&, const_iterator);
void splice_after(const_iterator, slist &, const_iterator, const_iterator);
void splice_after(const_iterator, slist &&, const_iterator, const_iterator);
void splice_after(const_iterator, slist &, const_iterator, const_iterator,
                  size_type);
void splice_after(const_iterator, slist &&, const_iterator, const_iterator,
                  size_type);
void remove(const T &);
template<typename Pred> void remove_if(Pred);
void unique();
template<typename Pred> void unique(Pred);
void merge(slist &);
void merge(slist &&);
template<typename StrictWeakOrdering>
    void merge(slist &, StrictWeakOrdering);
template<typename StrictWeakOrdering>
    void merge(slist &&, StrictWeakOrdering);
void sort();
template<typename StrictWeakOrdering> void sort(StrictWeakOrdering);
void reverse();
template<class... Args> iterator emplace(const_iterator, Args &&...);
iterator insert(const_iterator, const T &);
iterator insert(const_iterator, T &&);
iterator insert(const_iterator, size_type, const value_type &);
template<typename InIter> iterator insert(const_iterator, InIter, InIter);
iterator erase(const_iterator);
iterator erase(const_iterator, const_iterator);
void splice(const_iterator, slist &);
void splice(const_iterator, slist &&);
void splice(const_iterator, slist &, const_iterator);
void splice(const_iterator, slist &&, const_iterator);
void splice(const_iterator, slist &, const_iterator, const_iterator);
void splice(const_iterator, slist &&, const_iterator, const_iterator);
};

```

Description

An slist is a singly linked list: a list where each element is linked to the next element, but not to the previous element. That is, it is a Sequence that supports forward but not backward traversal, and (amortized) constant time insertion and removal of elements. Slists, like lists, have the important property that insertion and splicing do not invalidate iterators to list elements, and that even removal invalidates only the iterators that point to the elements that are removed. The ordering of iterators may be changed (that is, `slist<T>::iterator` might have a different predecessor or successor after a list operation than it did before), but the iterators themselves will not be invalidated or made to point to different elements unless that invalidation or mutation is explicit.

The main difference between slist and list is that list's iterators are bidirectional iterators, while slist's iterators are forward iterators. This means that slist is less versatile than list; frequently, however, bidirectional iterators are unnecessary. You should usually use slist unless you actually need the extra functionality of list, because singly linked lists are smaller and faster than double linked lists.

Important performance note: like every other Sequence, slist defines the member functions `insert` and `erase`. Using these member functions carelessly, however, can result in disastrously slow programs. The problem is that `insert`'s first argument is an iterator `p`, and that it inserts the new element(s) before `p`. This means that `insert` must find the iterator just before `p`; this is a constant-time operation for list, since list has bidirectional iterators, but for slist it must find that iterator by traversing the list from the beginning up to `p`. In other words: `insert` and `erase` are slow operations anywhere but near the beginning of the slist.

Slist provides the member functions `insert_after` and `erase_after`, which are constant time operations: you should always use `insert_after` and `erase_after` whenever possible. If you find that `insert_after` and `erase_after` aren't adequate for your needs, and that you often need to use `insert` and `erase` in the middle of the list, then you should probably use list instead of slist.

slist public construct/copy/destroy

1.

```
slist();
```

Effects: Constructs a list taking the allocator as parameter.

Throws: If allocator_type's copy constructor throws.

Complexity: Constant.

2.

```
explicit slist(const allocator_type & a);
```

Effects: Constructs a list taking the allocator as parameter.

Throws: Nothing

Complexity: Constant.

3.

```
explicit slist(size_type n);
```

4.

```
explicit slist(size_type n, const value_type & x,
               const allocator_type & a = allocator_type());
```

Effects: Constructs a list that will use a copy of allocator a and inserts n copies of value.

Throws: If allocator_type's default constructor or copy constructor throws or T's default or copy constructor throws.

Complexity: Linear to n.

5.

```
template<typename InpIt>
slist(InpIt first, InpIt last, const allocator_type & a = allocator_type());
```

Effects: Constructs a list that will use a copy of allocator a and inserts a copy of the range [first, last) in the list.

Throws: If allocator_type's default constructor or copy constructor throws or T's constructor taking an dereferenced InpIt throws.

Complexity: Linear to the range [first, last).

6.

```
slist(const slist & x);
```

Effects: Copy constructs a list.

Postcondition: x == *this.

Throws: If allocator_type's default constructor or copy constructor throws.

Complexity: Linear to the elements x contains.

7.

```
slist(slist && x);
```

Effects: Move constructor. Moves mx's resources to *this.

Throws: If allocator_type's copy constructor throws.

Complexity: Constant.

8.

```
slist(const slist & x, const allocator_type & a);
```

Effects: Copy constructs a list using the specified allocator.

Postcondition: $x == *this$.

Throws: If allocator_type's default constructor or copy constructor throws.

Complexity: Linear to the elements x contains.

9.

```
slist(slist && x, const allocator_type & a);
```

Effects: Move constructor using the specified allocator. Moves x's resources to *this.

Throws: If allocation or value_type's copy constructor throws.

Complexity: Constant if $a == x.get_allocator()$, linear otherwise.

10.

```
slist& operator=(const slist & x);
```

Effects: Makes *this contain the same elements as x.

Postcondition: $this->size() == x.size()$. *this contains a copy of each of x's elements.

Throws: If memory allocation throws or T's copy constructor throws.

Complexity: Linear to the number of elements in x.

11.

```
slist& operator=(slist && x);
```

Effects: Makes *this contain the same elements as x.

Postcondition: $this->size() == x.size()$. *this contains a copy of each of x's elements.

Throws: If memory allocation throws or T's copy constructor throws.

Complexity: Linear to the number of elements in x.

12.

```
~slist();
```

Effects: Destroys the list. All stored values are destroyed and used memory is deallocated.

Throws: Nothing.

Complexity: Linear to the number of elements.

slist public member functions

1.

```
void assign(size_type n, const T & val);
```

Effects: Assigns the n copies of val to *this.

Throws: If memory allocation throws or T's copy constructor throws.

Complexity: Linear to n.

2.

```
template<typename InpIt> void assign(InpIt first, InpIt last);
```

Effects: Assigns the range [first, last) to *this.

Throws: If memory allocation throws or T's constructor from dereferencing InpIt throws.

Complexity: Linear to n.

3.

```
allocator_type get_allocator() const;
```

Effects: Returns a copy of the internal allocator.

Throws: If allocator's copy constructor throws.

Complexity: Constant.

4.

```
stored_allocator_type & get_stored_allocator();
```

Effects: Returns a reference to the internal allocator.

Throws: Nothing

Complexity: Constant.

Note: Non-standard extension.

5.

```
const stored_allocator_type & get_stored_allocator() const;
```

Effects: Returns a reference to the internal allocator.

Throws: Nothing

Complexity: Constant.

Note: Non-standard extension.

6.

```
iterator before_begin();
```

Effects: Returns a non-dereferenceable iterator that, when incremented, yields begin(). This iterator may be used as the argument to insert_after, erase_after, etc.

Throws: Nothing.

Complexity: Constant.

7.

```
const_iterator before_begin() const;
```

Effects: Returns a non-dereferenceable const_iterator that, when incremented, yields begin(). This iterator may be used as the argument to insert_after, erase_after, etc.

Throws: Nothing.

Complexity: Constant.

8.

```
iterator begin();
```

Effects: Returns an iterator to the first element contained in the list.

Throws: Nothing.

Complexity: Constant.

9.

```
const_iterator begin() const;
```

Effects: Returns a `const_iterator` to the first element contained in the list.

Throws: Nothing.

Complexity: Constant.

10.

```
iterator end();
```

Effects: Returns an iterator to the end of the list.

Throws: Nothing.

Complexity: Constant.

11.

```
const_iterator end() const;
```

Effects: Returns a `const_iterator` to the end of the list.

Throws: Nothing.

Complexity: Constant.

12.

```
const_iterator cbefore_begin() const;
```

Effects: Returns a non-dereferenceable `const_iterator` that, when incremented, yields `begin()`. This iterator may be used as the argument to `insert_after`, `erase_after`, etc.

Throws: Nothing.

Complexity: Constant.

13.

```
const_iterator cbegin() const;
```

Effects: Returns a `const_iterator` to the first element contained in the list.

Throws: Nothing.

Complexity: Constant.

14.

```
const_iterator cend() const;
```

Effects: Returns a `const_iterator` to the end of the list.

Throws: Nothing.

Complexity: Constant.

15.

```
iterator previous(iterator p);
```

Returns: The iterator to the element before *i* in the sequence. Returns the end-iterator, if either *i* is the begin-iterator or the sequence is empty.

Throws: Nothing.

Complexity: Linear to the number of elements before *i*.

Note: Non-standard extension.

```
16. const_iterator previous(const_iterator p);
```

Returns: The `const_iterator` to the element before *i* in the sequence. Returns the end-`const_iterator`, if either *i* is the begin-`const_iterator` or the sequence is empty.

Throws: Nothing.

Complexity: Linear to the number of elements before *i*.

Note: Non-standard extension.

```
17. bool empty() const;
```

Effects: Returns true if the list contains no elements.

Throws: Nothing.

Complexity: Constant.

```
18. size_type size() const;
```

Effects: Returns the number of the elements contained in the list.

Throws: Nothing.

Complexity: Constant.

```
19. size_type max_size() const;
```

Effects: Returns the largest possible size of the list.

Throws: Nothing.

Complexity: Constant.

```
20. void resize(size_type new_size);
```

Effects: Inserts or erases elements at the end such that the size becomes *n*. New elements are default constructed.

Throws: If memory allocation throws, or *T*'s copy constructor throws.

Complexity: Linear to the difference between `size()` and `new_size`.

```
21. void resize(size_type new_size, const T & x);
```

Effects: Inserts or erases elements at the end such that the size becomes *n*. New elements are copy constructed from *x*.

Throws: If memory allocation throws, or T's copy constructor throws.

Complexity: Linear to the difference between size() and new_size.

```
22. reference front();
```

Requires: !empty()

Effects: Returns a reference to the first element from the beginning of the container.

Throws: Nothing.

Complexity: Constant.

```
23. const_reference front() const;
```

Requires: !empty()

Effects: Returns a const reference to the first element from the beginning of the container.

Throws: Nothing.

Complexity: Constant.

```
24. template<class... Args> void emplace_front(Args &&... args);
```

Effects: Inserts an object of type T constructed with std::forward<Args>(args)... in the front of the list

Throws: If memory allocation throws or T's copy constructor throws.

Complexity: Amortized constant time.

```
25. template<class... Args>
    iterator emplace_after(const_iterator prev, Args &&... args);
```

Effects: Inserts an object of type T constructed with std::forward<Args>(args)... after prev

Throws: If memory allocation throws or T's in-place constructor throws.

Complexity: Constant

```
26. void push_front(const T & x);
```

Effects: Inserts a copy of x at the beginning of the list.

Throws: If memory allocation throws or T's copy constructor throws.

Complexity: Amortized constant time.

```
27. void push_front(T && x);
```

Effects: Constructs a new element in the beginning of the list and moves the resources of mx to this new element.

Throws: If memory allocation throws.

Complexity: Amortized constant time.

```
28. iterator insert_after(const_iterator prev_pos, const T & x);
```

Requires: p must be a valid iterator of *this.

Effects: Inserts a copy of the value after the position pointed by prev_p.

Returns: An iterator to the inserted element.

Throws: If memory allocation throws or T's copy constructor throws.

Complexity: Amortized constant time.

Note: Does not affect the validity of iterators and references of previous values.

```
29. iterator insert_after(const_iterator prev_pos, T && x);
```

Requires: prev_pos must be a valid iterator of *this.

Effects: Inserts a move constructed copy object from the value after the p pointed by prev_pos.

Returns: An iterator to the inserted element.

Throws: If memory allocation throws.

Complexity: Amortized constant time.

Note: Does not affect the validity of iterators and references of previous values.

```
30. iterator insert_after(const_iterator prev_pos, size_type n,
                        const value_type & x);
```

Requires: prev_pos must be a valid iterator of *this.

Effects: Inserts n copies of x after prev_pos.

Returns: an iterator to the last inserted element or prev_pos if n is 0.

Throws: If memory allocation throws or T's copy constructor throws.

Complexity: Linear to n.

Note: Does not affect the validity of iterators and references of previous values.

```
31. template<typename InpIt>
    iterator insert_after(const_iterator prev_pos, InpIt first, InpIt last);
```

Requires: prev_pos must be a valid iterator of *this.

Effects: Inserts the range pointed by [first, last) after the position prev_pos.

Returns: an iterator to the last inserted element or prev_pos if first == last.

Throws: If memory allocation throws, T's constructor from a dereferenced InpIt throws.

Complexity: Linear to the number of elements inserted.

Note: Does not affect the validity of iterators and references of previous values.

```
32. void pop_front();
```

Effects: Removes the first element from the list.

Throws: Nothing.

Complexity: Amortized constant time.

```
33. iterator erase_after(const_iterator prev_pos);
```

Effects: Erases the element after the element pointed by `prev_pos` of the list.

Returns: the first element remaining beyond the removed elements, or `end()` if no such element exists.

Throws: Nothing.

Complexity: Constant.

Note: Does not invalidate iterators or references to non erased elements.

```
34. iterator erase_after(const_iterator before_first, const_iterator last);
```

Effects: Erases the range (`before_first`, `last`) from the list.

Returns: the first element remaining beyond the removed elements, or `end()` if no such element exists.

Throws: Nothing.

Complexity: Linear to the number of erased elements.

Note: Does not invalidate iterators or references to non erased elements.

```
35. void swap(slist & x);
```

Effects: Swaps the contents of `*this` and `x`.

Throws: Nothing.

Complexity: Linear to the number of elements on `*this` and `x`.

```
36. void clear();
```

Effects: Erases all the elements of the list.

Throws: Nothing.

Complexity: Linear to the number of elements in the list.

```
37. void splice_after(const_iterator prev_pos, slist & x);
```

Requires: `p` must point to an element contained by the list. `x != *this`

Effects: Transfers all the elements of list `x` to this list, after the the element pointed by `p`. No destructors or copy constructors are called.

Throws: `std::runtime_error` if this' allocator and `x`'s allocator are not equal.

Complexity: Linear to the elements in x.

Note: Iterators of values obtained from list x now point to elements of this list. Iterators of this list and all the references are not invalidated.

```
38. void splice_after(const_iterator prev_pos, slist && x);
```

Requires: p must point to an element contained by the list. $x \neq *this$

Effects: Transfers all the elements of list x to this list, after the the element pointed by p. No destructors or copy constructors are called.

Throws: `std::runtime_error` if this' allocator and x's allocator are not equal.

Complexity: Linear to the elements in x.

Note: Iterators of values obtained from list x now point to elements of this list. Iterators of this list and all the references are not invalidated.

```
39. void splice_after(const_iterator prev_pos, slist & x, const_iterator prev);
```

Requires: prev_pos must be a valid iterator of this. i must point to an element contained in list x. this' allocator and x's allocator shall compare equal.

Effects: Transfers the value pointed by i, from list x to this list, after the element pointed by prev_pos. If $prev_pos == prev$ or $prev_pos == ++prev$, this function is a null operation.

Throws: Nothing

Complexity: Constant.

Note: Iterators of values obtained from list x now point to elements of this list. Iterators of this list and all the references are not invalidated.

```
40. void splice_after(const_iterator prev_pos, slist && x, const_iterator prev);
```

Requires: prev_pos must be a valid iterator of this. i must point to an element contained in list x. this' allocator and x's allocator shall compare equal.

Effects: Transfers the value pointed by i, from list x to this list, after the element pointed by prev_pos. If $prev_pos == prev$ or $prev_pos == ++prev$, this function is a null operation.

Throws: Nothing

Complexity: Constant.

Note: Iterators of values obtained from list x now point to elements of this list. Iterators of this list and all the references are not invalidated.

```
41. void splice_after(const_iterator prev_pos, slist & x,
                   const_iterator before_first, const_iterator before_last);
```

Requires: prev_pos must be a valid iterator of this. before_first and before_last must be valid iterators of x. prev_pos must not be contained in [before_first, before_last) range. this' allocator and x's allocator shall compare equal.

Effects: Transfers the range [before_first + 1, before_last + 1) from list x to this list, after the element pointed by prev_pos.

Throws: Nothing

Complexity: Linear to the number of transferred elements.

Note: Iterators of values obtained from list x now point to elements of this list. Iterators of this list and all the references are not invalidated.

```
42 void splice_after(const_iterator prev_pos, slist && x,
                  const_iterator before_first, const_iterator before_last);
```

Requires: prev_pos must be a valid iterator of this. before_first and before_last must be valid iterators of x. prev_pos must not be contained in [before_first, before_last) range. this' allocator and x's allocator shall compare equal.

Effects: Transfers the range [before_first + 1, before_last + 1) from list x to this list, after the element pointed by prev_pos.

Throws: Nothing

Complexity: Linear to the number of transferred elements.

Note: Iterators of values obtained from list x now point to elements of this list. Iterators of this list and all the references are not invalidated.

```
43 void splice_after(const_iterator prev_pos, slist & x,
                  const_iterator before_first, const_iterator before_last,
                  size_type n);
```

Requires: prev_pos must be a valid iterator of this. before_first and before_last must be valid iterators of x. prev_pos must not be contained in [before_first, before_last) range. n == std::distance(before_first, before_last). this' allocator and x's allocator shall compare equal.

Effects: Transfers the range [before_first + 1, before_last + 1) from list x to this list, after the element pointed by prev_pos.

Throws: Nothing

Complexity: Constant.

Note: Iterators of values obtained from list x now point to elements of this list. Iterators of this list and all the references are not invalidated.

```
44 void splice_after(const_iterator prev_pos, slist && x,
                  const_iterator before_first, const_iterator before_last,
                  size_type n);
```

Requires: prev_pos must be a valid iterator of this. before_first and before_last must be valid iterators of x. prev_pos must not be contained in [before_first, before_last) range. n == std::distance(before_first, before_last). this' allocator and x's allocator shall compare equal.

Effects: Transfers the range [before_first + 1, before_last + 1) from list x to this list, after the element pointed by prev_pos.

Throws: Nothing

Complexity: Constant.

Note: Iterators of values obtained from list x now point to elements of this list. Iterators of this list and all the references are not invalidated.

```
45 void remove(const T & value);
```

Effects: Removes all the elements that compare equal to value.

Throws: Nothing.

Complexity: Linear time. It performs exactly `size()` comparisons for equality.

Note: The relative order of elements that are not removed is unchanged, and iterators to elements that are not removed remain valid.

```
46. template<typename Pred> void remove_if(Pred pred);
```

Effects: Removes all the elements for which a specified predicate is satisfied.

Throws: If `pred` throws.

Complexity: Linear time. It performs exactly `size()` calls to the predicate.

Note: The relative order of elements that are not removed is unchanged, and iterators to elements that are not removed remain valid.

```
47. void unique();
```

Effects: Removes adjacent duplicate elements or adjacent elements that are equal from the list.

Throws: If comparison throws.

Complexity: Linear time (`size()-1` comparisons equality comparisons).

Note: The relative order of elements that are not removed is unchanged, and iterators to elements that are not removed remain valid.

```
48. template<typename Pred> void unique(Pred pred);
```

Effects: Removes adjacent duplicate elements or adjacent elements that satisfy some binary predicate from the list.

Throws: If `pred` throws.

Complexity: Linear time (`size()-1` comparisons calls to `pred()`).

Note: The relative order of elements that are not removed is unchanged, and iterators to elements that are not removed remain valid.

```
49. void merge(slist & x);
```

Requires: The lists `x` and `*this` must be distinct.

Effects: This function removes all of `x`'s elements and inserts them in order into `*this` according to `std::less<value_type>`. The merge is stable; that is, if an element from `*this` is equivalent to one from `x`, then the element from `*this` will precede the one from `x`.

Throws: If comparison throws.

Complexity: This function is linear time: it performs at most `size() + x.size() - 1` comparisons.

```
50. void merge(slist && x);
```

Requires: The lists `x` and `*this` must be distinct.

Effects: This function removes all of x's elements and inserts them in order into *this according to `std::less<value_type>`. The merge is stable; that is, if an element from *this is equivalent to one from x, then the element from *this will precede the one from x.

Throws: If comparison throws.

Complexity: This function is linear time: it performs at most `size() + x.size() - 1` comparisons.

```
51. template<typename StrictWeakOrdering>
    void merge(slist & x, StrictWeakOrdering comp);
```

Requires: p must be a comparison function that induces a strict weak ordering and both *this and x must be sorted according to that ordering. The lists x and *this must be distinct.

Effects: This function removes all of x's elements and inserts them in order into *this. The merge is stable; that is, if an element from *this is equivalent to one from x, then the element from *this will precede the one from x.

Throws: If comp throws.

Complexity: This function is linear time: it performs at most `size() + x.size() - 1` comparisons.

Note: Iterators and references to *this are not invalidated.

```
52. template<typename StrictWeakOrdering>
    void merge(slist && x, StrictWeakOrdering comp);
```

Requires: p must be a comparison function that induces a strict weak ordering and both *this and x must be sorted according to that ordering. The lists x and *this must be distinct.

Effects: This function removes all of x's elements and inserts them in order into *this. The merge is stable; that is, if an element from *this is equivalent to one from x, then the element from *this will precede the one from x.

Throws: If comp throws.

Complexity: This function is linear time: it performs at most `size() + x.size() - 1` comparisons.

Note: Iterators and references to *this are not invalidated.

```
53. void sort();
```

Effects: This function sorts the list *this according to `std::less<value_type>`. The sort is stable, that is, the relative order of equivalent elements is preserved.

Throws: If comparison throws.

Notes: Iterators and references are not invalidated.

Complexity: The number of comparisons is approximately $N \log N$, where N is the list's size.

```
54. template<typename StrictWeakOrdering> void sort(StrictWeakOrdering comp);
```

Effects: This function sorts the list *this according to `std::less<value_type>`. The sort is stable, that is, the relative order of equivalent elements is preserved.

Throws: If comp throws.

Notes: Iterators and references are not invalidated.

Complexity: The number of comparisons is approximately $N \log N$, where N is the list's size.

```
55. void reverse();
```

Effects: Reverses the order of elements in the list.

Throws: Nothing.

Complexity: This function is linear time.

Note: Iterators and references are not invalidated

```
56. template<class... Args> iterator emplace(const_iterator p, Args &&... args);
```

Effects: Inserts an object of type T constructed with `std::forward<Args>(args)...` before p

Throws: If memory allocation throws or T 's in-place constructor throws.

Complexity: Linear to the elements before p

```
57. iterator insert(const_iterator position, const T & x);
```

Requires: p must be a valid iterator of $*this$.

Effects: Insert a copy of x before p .

Returns: an iterator to the inserted element.

Throws: If memory allocation throws or x 's copy constructor throws.

Complexity: Linear to the elements before p .

```
58. iterator insert(const_iterator prev_pos, T && x);
```

Requires: p must be a valid iterator of $*this$.

Effects: Insert a new element before p with mx 's resources.

Returns: an iterator to the inserted element.

Throws: If memory allocation throws.

Complexity: Linear to the elements before p .

```
59. iterator insert(const_iterator p, size_type n, const value_type & x);
```

Requires: p must be a valid iterator of $*this$.

Effects: Inserts n copies of x before p .

Returns: an iterator to the first inserted element or p if $n == 0$.

Throws: If memory allocation throws or T 's copy constructor throws.

Complexity: Linear to n plus linear to the elements before p .

```
60. template<typename InIter>
    iterator insert(const_iterator p, InIter first, InIter last);
```

Requires: p must be a valid iterator of *this.

Effects: Insert a copy of the [first, last) range before p.

Returns: an iterator to the first inserted element or p if first == last.

Throws: If memory allocation throws, T's constructor from a dereferenced InPIt throws.

Complexity: Linear to std::distance [first, last) plus linear to the elements before p.

```
61. iterator erase(const_iterator p);
```

Requires: p must be a valid iterator of *this.

Effects: Erases the element at p.

Throws: Nothing.

Complexity: Linear to the number of elements before p.

```
62. iterator erase(const_iterator first, const_iterator last);
```

Requires: first and last must be valid iterator to elements in *this.

Effects: Erases the elements pointed by [first, last).

Throws: Nothing.

Complexity: Linear to the distance between first and last plus linear to the elements before first.

```
63. void splice(const_iterator p, slist & x);
```

Requires: p must point to an element contained by the list. x != *this. this' allocator and x's allocator shall compare equal

Effects: Transfers all the elements of list x to this list, before the the element pointed by p. No destructors or copy constructors are called.

Throws: Nothing

Complexity: Linear in distance(begin(), p), and linear in x.size().

Note: Iterators of values obtained from list x now point to elements of this list. Iterators of this list and all the references are not invalidated.

```
64. void splice(const_iterator p, slist && x);
```

Requires: p must point to an element contained by the list. x != *this. this' allocator and x's allocator shall compare equal

Effects: Transfers all the elements of list x to this list, before the the element pointed by p. No destructors or copy constructors are called.

Throws: Nothing

Complexity: Linear in distance(begin(), p), and linear in x.size().

Note: Iterators of values obtained from list x now point to elements of this list. Iterators of this list and all the references are not invalidated.

```
65. void splice(const_iterator p, slist & x, const_iterator i);
```

Requires: p must point to an element contained by this list. i must point to an element contained in list x. this' allocator and x's allocator shall compare equal

Effects: Transfers the value pointed by i, from list x to this list, before the the element pointed by p. No destructors or copy constructors are called. If p == i or p == ++i, this function is a null operation.

Throws: Nothing

Complexity: Linear in distance(begin(), p), and in distance(x.begin(), i).

Note: Iterators of values obtained from list x now point to elements of this list. Iterators of this list and all the references are not invalidated.

```
66. void splice(const_iterator p, slist && x, const_iterator i);
```

Requires: p must point to an element contained by this list. i must point to an element contained in list x. this' allocator and x's allocator shall compare equal.

Effects: Transfers the value pointed by i, from list x to this list, before the the element pointed by p. No destructors or copy constructors are called. If p == i or p == ++i, this function is a null operation.

Throws: Nothing

Complexity: Linear in distance(begin(), p), and in distance(x.begin(), i).

Note: Iterators of values obtained from list x now point to elements of this list. Iterators of this list and all the references are not invalidated.

```
67. void splice(const_iterator p, slist & x, const_iterator first,
             const_iterator last);
```

Requires: p must point to an element contained by this list. first and last must point to elements contained in list x.

Effects: Transfers the range pointed by first and last from list x to this list, before the the element pointed by p. No destructors or copy constructors are called. this' allocator and x's allocator shall compare equal.

Throws: Nothing

Complexity: Linear in distance(begin(), p), in distance(x.begin(), first), and in distance(first, last).

Note: Iterators of values obtained from list x now point to elements of this list. Iterators of this list and all the references are not invalidated.

```
68. void splice(const_iterator p, slist && x, const_iterator first,
             const_iterator last);
```

Requires: p must point to an element contained by this list. first and last must point to elements contained in list x. this' allocator and x's allocator shall compare equal

Effects: Transfers the range pointed by first and last from list x to this list, before the the element pointed by p. No destructors or copy constructors are called.

Throws: Nothing

Complexity: Linear in distance(begin(), p), in distance(x.begin(), first), and in distance(first, last).

Note: Iterators of values obtained from list x now point to elements of this list. Iterators of this list and all the references are not invalidated.

Class template set

boost::container::set

Synopsis

```
// In header: <boost/container/container_fwd.hpp>

template<typename Key, typename Compare = std::less<Key>,
         typename Allocator = std::allocator<Key> >
class set {
public:
    // construct/copy/destroy
    set();
    explicit set(const Compare &, const allocator_type & = allocator_type());
    template<typename InputIterator>
        set(InputIterator, InputIterator, const Compare & = Compare(),
            const allocator_type & = allocator_type());
    template<typename InputIterator>
        set(ordered_unique_range_t, InputIterator, InputIterator,
            const Compare & = Compare(),
            const allocator_type & = allocator_type());
    set(const set &);
    set(set &&);
    set(const set &, const allocator_type &);
    set(set &&, const allocator_type &);
    set& operator=(const set &);
    set& operator=(set &&);

    // public member functions
    allocator_type get_allocator() const;
    const stored_allocator_type & get_stored_allocator() const;
    stored_allocator_type & get_stored_allocator();
    iterator begin();
    const_iterator begin() const;
    iterator end();
    const_iterator end() const;
    reverse_iterator rbegin();
    const_reverse_iterator rbegin() const;
    reverse_iterator rend();
    const_reverse_iterator rend() const;
    const_iterator cbegin() const;
    const_iterator cend() const;
    const_reverse_iterator crbegin() const;
    const_reverse_iterator crend() const;
    bool empty() const;
    size_type size() const;
    size_type max_size() const;
    template<class... Args> std::pair< iterator, bool > emplace(Args &&...);
    template<class... Args> iterator emplace_hint(const_iterator, Args &&...);
    std::pair< iterator, bool > insert(const value_type &);
    std::pair< iterator, bool > insert(value_type &&);
    iterator insert(const_iterator, const value_type &);
    iterator insert(const_iterator, value_type &&);
    template<typename InputIterator> void insert(InputIterator, InputIterator);
    iterator erase(const_iterator);
```

```

size_type erase(const key_type &);
iterator erase(const_iterator, const_iterator);
void swap(set &);
void clear();
key_compare key_comp() const;
value_compare value_comp() const;
iterator find(const key_type &);
const_iterator find(const key_type &) const;
size_type count(const key_type &) const;
iterator lower_bound(const key_type &);
const_iterator lower_bound(const key_type &) const;
iterator upper_bound(const key_type &);
const_iterator upper_bound(const key_type &) const;
std::pair< iterator, iterator > equal_range(const key_type &);
std::pair< const_iterator, const_iterator >
equal_range(const key_type &) const;
};

```

Description

A set is a kind of associative container that supports unique keys (contains at most one of each key value) and provides for fast retrieval of the keys themselves. Class set supports bidirectional iterators.

A set satisfies all of the requirements of a container and of a reversible container, and of an associative container. A set also provides most operations described in for unique keys.

set public construct/copy/destroy

1.

```
set();
```

Effects: Default constructs an empty set.

Complexity: Constant.

2.

```
explicit set(const Compare & comp,
            const allocator_type & a = allocator_type());
```

Effects: Constructs an empty set using the specified comparison object and allocator.

Complexity: Constant.

3.

```
template<typename InputIterator>
set(InputIterator first, InputIterator last,
    const Compare & comp = Compare(),
    const allocator_type & a = allocator_type());
```

Effects: Constructs an empty set using the specified comparison object and allocator, and inserts elements from the range [first, last).

Complexity: Linear in N if the range [first, last) is already sorted using comp and otherwise $N \log N$, where N is last - first.

4.

```
template<typename InputIterator>
set(ordered_unique_range_t, InputIterator first, InputIterator last,
    const Compare & comp = Compare(),
    const allocator_type & a = allocator_type());
```

Effects: Constructs an empty set using the specified comparison object and allocator, and inserts elements from the ordered unique range [first, last). This function is more efficient than the normal range creation for ordered ranges.

Requires: [first ,last) must be ordered according to the predicate and must be unique values.

Complexity: Linear in N.

```
5. set(const set & x);
```

Effects: Copy constructs a set.

Complexity: Linear in x.size().

```
6. set(set && x);
```

Effects: Move constructs a set. Constructs *this using x's resources.

Complexity: Constant.

Postcondition: x is emptied.

```
7. set(const set & x, const allocator_type & a);
```

Effects: Copy constructs a set using the specified allocator.

Complexity: Linear in x.size().

```
8. set(set && x, const allocator_type & a);
```

Effects: Move constructs a set using the specified allocator. Constructs *this using x's resources.

Complexity: Constant if a == x.get_allocator(), linear otherwise.

```
9. set& operator=(const set & x);
```

Effects: Makes *this a copy of x.

Complexity: Linear in x.size().

```
10. set& operator=(set && x);
```

Effects: this->swap(x.get()).

Complexity: Constant.

set public member functions

```
1. allocator_type get_allocator() const;
```

Effects: Returns a copy of the Allocator that was passed to the object's constructor.

Complexity: Constant.

```
2. const stored_allocator_type & get_stored_allocator() const;
```

Effects: Returns a reference to the internal allocator.

Throws: Nothing

Complexity: Constant.

Note: Non-standard extension.

3.

```
stored_allocator_type & get_stored_allocator();
```

Effects: Returns a reference to the internal allocator.

Throws: Nothing

Complexity: Constant.

Note: Non-standard extension.

4.

```
iterator begin();
```

Effects: Returns an iterator to the first element contained in the container.

Throws: Nothing.

Complexity: Constant

5.

```
const_iterator begin() const;
```

Effects: Returns a const_iterator to the first element contained in the container.

Throws: Nothing.

Complexity: Constant.

6.

```
iterator end();
```

Effects: Returns an iterator to the end of the container.

Throws: Nothing.

Complexity: Constant.

7.

```
const_iterator end() const;
```

Effects: Returns a const_iterator to the end of the container.

Throws: Nothing.

Complexity: Constant.

8.

```
reverse_iterator rbegin();
```

Effects: Returns a reverse_iterator pointing to the beginning of the reversed container.

Throws: Nothing.

Complexity: Constant.

9.

```
const_reverse_iterator rbegin() const;
```

Effects: Returns a `const_reverse_iterator` pointing to the beginning of the reversed container.

Throws: Nothing.

Complexity: Constant.

10.

```
reverse_iterator rend();
```

Effects: Returns a `reverse_iterator` pointing to the end of the reversed container.

Throws: Nothing.

Complexity: Constant.

11.

```
const_reverse_iterator rend() const;
```

Effects: Returns a `const_reverse_iterator` pointing to the end of the reversed container.

Throws: Nothing.

Complexity: Constant.

12.

```
const_iterator cbegin() const;
```

Effects: Returns a `const_iterator` to the first element contained in the container.

Throws: Nothing.

Complexity: Constant.

13.

```
const_iterator cend() const;
```

Effects: Returns a `const_iterator` to the end of the container.

Throws: Nothing.

Complexity: Constant.

14.

```
const_reverse_iterator crbegin() const;
```

Effects: Returns a `const_reverse_iterator` pointing to the beginning of the reversed container.

Throws: Nothing.

Complexity: Constant.

15.

```
const_reverse_iterator crend() const;
```

Effects: Returns a `const_reverse_iterator` pointing to the end of the reversed container.

Throws: Nothing.

Complexity: Constant.

16.

```
bool empty() const;
```

Effects: Returns true if the container contains no elements.

Throws: Nothing.

Complexity: Constant.

```
17. size_type size() const;
```

Effects: Returns the number of the elements contained in the container.

Throws: Nothing.

Complexity: Constant.

```
18. size_type max_size() const;
```

Effects: Returns the largest possible size of the container.

Throws: Nothing.

Complexity: Constant.

```
19. template<class... Args> std::pair< iterator, bool > emplace(Args &&... args);
```

Effects: Inserts an object *x* of type *Key* constructed with `std::forward<Args>(args)...` if and only if there is no element in the container with equivalent value. and returns the iterator pointing to the newly inserted element.

Returns: The `bool` component of the returned pair is true if and only if the insertion takes place, and the iterator component of the pair points to the element with key equivalent to the key of *x*.

Throws: If memory allocation throws or *Key*'s in-place constructor throws.

Complexity: Logarithmic.

```
20. template<class... Args>
    iterator emplace_hint(const_iterator hint, Args &&... args);
```

Effects: Inserts an object of type *Key* constructed with `std::forward<Args>(args)...` if and only if there is no element in the container with equivalent value. *p* is a hint pointing to where the insert should start to search.

Returns: An iterator pointing to the element with key equivalent to the key of *x*.

Complexity: Logarithmic.

```
21. std::pair< iterator, bool > insert(const value_type & x);
```

Effects: Inserts *x* if and only if there is no element in the container with key equivalent to the key of *x*.

Returns: The `bool` component of the returned pair is true if and only if the insertion takes place, and the iterator component of the pair points to the element with key equivalent to the key of *x*.

Complexity: Logarithmic.

```
22. std::pair< iterator, bool > insert(value_type && x);
```

Effects: Move constructs a new value from `x` if and only if there is no element in the container with key equivalent to the key of `x`.

Returns: The `bool` component of the returned pair is `true` if and only if the insertion takes place, and the iterator component of the pair points to the element with key equivalent to the key of `x`.

Complexity: Logarithmic.

23.

```
iterator insert(const_iterator p, const value_type & x);
```

Effects: Inserts a copy of `x` in the container if and only if there is no element in the container with key equivalent to the key of `x`. `p` is a hint pointing to where the insert should start to search.

Returns: An iterator pointing to the element with key equivalent to the key of `x`.

Complexity: Logarithmic in general, but amortized constant if `t` is inserted right before `p`.

24.

```
iterator insert(const_iterator position, value_type && x);
```

Effects: Inserts an element move constructed from `x` in the container. `p` is a hint pointing to where the insert should start to search.

Returns: An iterator pointing to the element with key equivalent to the key of `x`.

Complexity: Logarithmic.

25.

```
template<typename InputIterator>
void insert(InputIterator first, InputIterator last);
```

Requires: `first`, `last` are not iterators into `*this`.

Effects: inserts each element from the range `[first,last)` if and only if there is no element with key equivalent to the key of that element.

Complexity: At most $N \log(\text{size}()+N)$ (N is the distance from `first` to `last`)

26.

```
iterator erase(const_iterator p);
```

Effects: Erases the element pointed to by `p`.

Returns: Returns an iterator pointing to the element immediately following `q` prior to the element being erased. If no such element exists, returns `end()`.

Complexity: Amortized constant time

27.

```
size_type erase(const key_type & x);
```

Effects: Erases all elements in the container with key equivalent to `x`.

Returns: Returns the number of erased elements.

Complexity: $\log(\text{size}()) + \text{count}(k)$

28.

```
iterator erase(const_iterator first, const_iterator last);
```

Effects: Erases all the elements in the range `[first, last)`.

Returns: Returns last.

Complexity: $\log(\text{size}()) + N$ where N is the distance from first to last.

```
29. void swap(set & x);
```

Effects: Swaps the contents of *this and x.

Throws: Nothing.

Complexity: Constant.

```
30. void clear();
```

Effects: `erase(a.begin(),a.end())`.

Postcondition: `size() == 0`.

Complexity: linear in `size()`.

```
31. key_compare key_comp() const;
```

Effects: Returns the comparison object out of which a was constructed.

Complexity: Constant.

```
32. value_compare value_comp() const;
```

Effects: Returns an object of `value_compare` constructed out of the comparison object.

Complexity: Constant.

```
33. iterator find(const key_type & x);
```

Returns: An iterator pointing to an element with the key equivalent to `x`, or `end()` if such an element is not found.

Complexity: Logarithmic.

```
34. const_iterator find(const key_type & x) const;
```

Returns: Allocator `const_iterator` pointing to an element with the key equivalent to `x`, or `end()` if such an element is not found.

Complexity: Logarithmic.

```
35. size_type count(const key_type & x) const;
```

Returns: The number of elements with key equivalent to `x`.

Complexity: $\log(\text{size}()) + \text{count}(k)$

```
36. iterator lower_bound(const key_type & x);
```

Returns: An iterator pointing to the first element with key not less than `k`, or `a.end()` if such an element is not found.

Complexity: Logarithmic

```
37. const_iterator lower_bound(const key_type & x) const;
```

Returns: Allocator const iterator pointing to the first element with key not less than k, or a.end() if such an element is not found.

Complexity: Logarithmic

```
38. iterator upper_bound(const key_type & x);
```

Returns: An iterator pointing to the first element with key not less than x, or end() if such an element is not found.

Complexity: Logarithmic

```
39. const_iterator upper_bound(const key_type & x) const;
```

Returns: Allocator const iterator pointing to the first element with key not less than x, or end() if such an element is not found.

Complexity: Logarithmic

```
40. std::pair< iterator, iterator > equal_range(const key_type & x);
```

Effects: Equivalent to `std::make_pair(this->lower_bound(k), this->upper_bound(k))`.

Complexity: Logarithmic

```
41. std::pair< const_iterator, const_iterator >  
equal_range(const key_type & x) const;
```

Effects: Equivalent to `std::make_pair(this->lower_bound(k), this->upper_bound(k))`.

Complexity: Logarithmic

Class template multiset

`boost::container::multiset`

Synopsis

```

// In header: <boost/container/container_fwd.hpp>

template<typename Key, typename Compare = std::less<Key>,
        typename Allocator = std::allocator<Key> >
class multiset {
public:
    // construct/copy/destroy
    multiset();
    explicit multiset(const Compare &,
                    const allocator_type & = allocator_type());
    template<typename InputIterator>
        multiset(InputIterator, InputIterator, const Compare & = Compare(),
                const allocator_type & = allocator_type());
    template<typename InputIterator>
        multiset(ordered_range_t, InputIterator, InputIterator,
                const Compare & = Compare(),
                const allocator_type & = allocator_type());
    multiset(const multiset &);
    multiset(multiset &&);
    multiset(const multiset &, const allocator_type &);
    multiset(multiset &&, const allocator_type &);
    multiset& operator=(const multiset &);
    multiset& operator=(multiset &&);

    // public member functions
    allocator_type get_allocator() const;
    stored_allocator_type & get_stored_allocator();
    const stored_allocator_type & get_stored_allocator() const;
    iterator begin();
    const_iterator begin() const;
    iterator end();
    const_iterator end() const;
    reverse_iterator rbegin();
    const_reverse_iterator rbegin() const;
    reverse_iterator rend();
    const_reverse_iterator rend() const;
    const_iterator cbegin() const;
    const_iterator cend() const;
    const_reverse_iterator crbegin() const;
    const_reverse_iterator crend() const;
    bool empty() const;
    size_type size() const;
    size_type max_size() const;
    template<class... Args> iterator emplace(Args &&...);
    template<class... Args> iterator emplace_hint(const_iterator, Args &&...);
    iterator insert(const value_type &);
    iterator insert(value_type &&);
    iterator insert(const_iterator, const value_type &);
    iterator insert(const_iterator, value_type &&);
    template<typename InputIterator> void insert(InputIterator, InputIterator);
    iterator erase(const_iterator);
    size_type erase(const key_type &);
    iterator erase(const_iterator, const_iterator);
    void swap(multiset &);
    void clear();
    key_compare key_comp() const;
    value_compare value_comp() const;
    iterator find(const key_type &);
    const_iterator find(const key_type &) const;
    size_type count(const key_type &) const;

```

```

iterator lower_bound(const key_type &);
const_iterator lower_bound(const key_type &) const;
iterator upper_bound(const key_type &);
const_iterator upper_bound(const key_type &) const;
std::pair< iterator, iterator > equal_range(const key_type &);
std::pair< const_iterator, const_iterator >
equal_range(const key_type &) const;
};

```

Description

A multiset is a kind of associative container that supports equivalent keys (possibly contains multiple copies of the same key value) and provides for fast retrieval of the keys themselves. Class multiset supports bidirectional iterators.

A multiset satisfies all of the requirements of a container and of a reversible container, and of an associative container). multiset also provides most operations described for duplicate keys.

multiset public construct/copy/destruct

1.

```
multiset();
```

Effects: Constructs an empty multiset using the specified comparison object and allocator.

Complexity: Constant.

2.

```
explicit multiset(const Compare & comp,
                 const allocator_type & a = allocator_type());
```

Effects: Constructs an empty multiset using the specified comparison object and allocator.

Complexity: Constant.

3.

```
template<typename InputIterator>
multiset(InputIterator first, InputIterator last,
         const Compare & comp = Compare(),
         const allocator_type & a = allocator_type());
```

Effects: Constructs an empty multiset using the specified comparison object and allocator, and inserts elements from the range [first ,last).

Complexity: Linear in N if the range [first ,last) is already sorted using comp and otherwise N logN, where N is last - first.

4.

```
template<typename InputIterator>
multiset(ordered_range_t, InputIterator first, InputIterator last,
         const Compare & comp = Compare(),
         const allocator_type & a = allocator_type());
```

Effects: Constructs an empty multiset using the specified comparison object and allocator, and inserts elements from the ordered range [first ,last). This function is more efficient than the normal range creation for ordered ranges.

Requires: [first ,last) must be ordered according to the predicate.

Complexity: Linear in N.

5.

```
multiset(const multiset & x);
```

Effects: Copy constructs a multiset.

Complexity: Linear in `x.size()`.

```
6. multiset(multiset && x);
```

Effects: Move constructs a multiset. Constructs `*this` using `x`'s resources.

Complexity: Constant.

Postcondition: `x` is emptied.

```
7. multiset(const multiset & x, const allocator_type & a);
```

Effects: Copy constructs a multiset using the specified allocator.

Complexity: Linear in `x.size()`.

```
8. multiset(multiset && x, const allocator_type & a);
```

Effects: Move constructs a multiset using the specified allocator. Constructs `*this` using `x`'s resources.

Complexity: Constant if `a == x.get_allocator()`, linear otherwise.

Postcondition: `x` is emptied.

```
9. multiset& operator=(const multiset & x);
```

Effects: Makes `*this` a copy of `x`.

Complexity: Linear in `x.size()`.

```
10. multiset& operator=(multiset && x);
```

Effects: `this->swap(x.get())`.

Complexity: Constant.

`multiset` public member functions

```
1. allocator_type get_allocator() const;
```

Effects: Returns a copy of the Allocator that was passed to the object's constructor.

Complexity: Constant.

```
2. stored_allocator_type & get_stored_allocator();
```

Effects: Returns a reference to the internal allocator.

Throws: Nothing

Complexity: Constant.

Note: Non-standard extension.

3. `const stored_allocator_type & get_stored_allocator() const;`

Effects: Returns a reference to the internal allocator.

Throws: Nothing

Complexity: Constant.

Note: Non-standard extension.

4. `iterator begin();`

Effects: Returns an iterator to the first element contained in the container.

Throws: Nothing.

Complexity: Constant.

5. `const_iterator begin() const;`

Effects: Returns a `const_iterator` to the first element contained in the container.

Throws: Nothing.

Complexity: Constant.

6. `iterator end();`

Effects: Returns an iterator to the end of the container.

Throws: Nothing.

Complexity: Constant.

7. `const_iterator end() const;`

Effects: Returns a `const_iterator` to the end of the container.

Throws: Nothing.

Complexity: Constant.

8. `reverse_iterator rbegin();`

Effects: Returns a `reverse_iterator` pointing to the beginning of the reversed container.

Throws: Nothing.

Complexity: Constant.

9. `const_reverse_iterator rbegin() const;`

Effects: Returns a `const_reverse_iterator` pointing to the beginning of the reversed container.

Throws: Nothing.

Complexity: Constant.

10.

```
reverse_iterator rend();
```

Effects: Returns a reverse_iterator pointing to the end of the reversed container.

Throws: Nothing.

Complexity: Constant.

11.

```
const_reverse_iterator rend() const;
```

Effects: Returns a const_reverse_iterator pointing to the end of the reversed container.

Throws: Nothing.

Complexity: Constant.

12.

```
const_iterator cbegin() const;
```

Effects: Returns a const_iterator to the first element contained in the container.

Throws: Nothing.

Complexity: Constant.

13.

```
const_iterator cend() const;
```

Effects: Returns a const_iterator to the end of the container.

Throws: Nothing.

Complexity: Constant.

14.

```
const_reverse_iterator crbegin() const;
```

Effects: Returns a const_reverse_iterator pointing to the beginning of the reversed container.

Throws: Nothing.

Complexity: Constant.

15.

```
const_reverse_iterator crend() const;
```

Effects: Returns a const_reverse_iterator pointing to the end of the reversed container.

Throws: Nothing.

Complexity: Constant.

16.

```
bool empty() const;
```

Effects: Returns true if the container contains no elements.

Throws: Nothing.

Complexity: Constant.

```
17. size_type size() const;
```

Effects: Returns the number of the elements contained in the container.

Throws: Nothing.

Complexity: Constant.

```
18. size_type max_size() const;
```

Effects: Returns the largest possible size of the container.

Throws: Nothing.

Complexity: Constant.

```
19. template<class... Args> iterator emplace(Args &&... args);
```

Effects: Inserts an object of type Key constructed with `std::forward<Args>(args)...` and returns the iterator pointing to the newly inserted element.

Complexity: Logarithmic.

```
20. template<class... Args>
    iterator emplace_hint(const_iterator hint, Args &&... args);
```

Effects: Inserts an object of type Key constructed with `std::forward<Args>(args)...`

Returns: An iterator pointing to the element with key equivalent to the key of x.

Complexity: Logarithmic in general, but amortized constant if t is inserted right before p.

```
21. iterator insert(const value_type & x);
```

Effects: Inserts x and returns the iterator pointing to the newly inserted element.

Complexity: Logarithmic.

```
22. iterator insert(value_type && x);
```

Effects: Inserts a copy of x in the container.

Returns: An iterator pointing to the element with key equivalent to the key of x.

Complexity: Logarithmic in general, but amortized constant if t is inserted right before p.

```
23. iterator insert(const_iterator p, const value_type & x);
```

Effects: Inserts a copy of x in the container. p is a hint pointing to where the insert should start to search.

Returns: An iterator pointing to the element with key equivalent to the key of x.

Complexity: Logarithmic in general, but amortized constant if t is inserted right before p.

```
24. iterator insert(const_iterator position, value_type && x);
```

Effects: Inserts a value move constructed from x in the container. p is a hint pointing to where the insert should start to search.

Returns: An iterator pointing to the element with key equivalent to the key of x.

Complexity: Logarithmic in general, but amortized constant if t is inserted right before p.

```
25. template<typename InputIterator>
    void insert(InputIterator first, InputIterator last);
```

Requires: first, last are not iterators into *this.

Effects: inserts each element from the range [first,last) .

Complexity: At most $N \log(\text{size}()+N)$ (N is the distance from first to last)

```
26. iterator erase(const_iterator p);
```

Effects: Erases the element pointed to by p.

Returns: Returns an iterator pointing to the element immediately following q prior to the element being erased. If no such element exists, returns end().

Complexity: Amortized constant time

```
27. size_type erase(const key_type & x);
```

Effects: Erases all elements in the container with key equivalent to x.

Returns: Returns the number of erased elements.

Complexity: $\log(\text{size}()) + \text{count}(k)$

```
28. iterator erase(const_iterator first, const_iterator last);
```

Effects: Erases all the elements in the range [first, last).

Returns: Returns last.

Complexity: $\log(\text{size}()+N)$ where N is the distance from first to last.

```
29. void swap(multiset & x);
```

Effects: Swaps the contents of *this and x.

Throws: Nothing.

Complexity: Constant.

```
30. void clear();
```

Effects: erase(a.begin(),a.end()).

Postcondition: size() == 0.

Complexity: linear in size().

```
31. key_compare key_comp() const;
```

Effects: Returns the comparison object out of which a was constructed.

Complexity: Constant.

```
32. value_compare value_comp() const;
```

Effects: Returns an object of value_compare constructed out of the comparison object.

Complexity: Constant.

```
33. iterator find(const key_type & x);
```

Returns: An iterator pointing to an element with the key equivalent to x, or end() if such an element is not found.

Complexity: Logarithmic.

```
34. const_iterator find(const key_type & x) const;
```

Returns: Allocator const iterator pointing to an element with the key equivalent to x, or end() if such an element is not found.

Complexity: Logarithmic.

```
35. size_type count(const key_type & x) const;
```

Returns: The number of elements with key equivalent to x.

Complexity: $\log(\text{size}()) + \text{count}(k)$

```
36. iterator lower_bound(const key_type & x);
```

Returns: An iterator pointing to the first element with key not less than k, or a.end() if such an element is not found.

Complexity: Logarithmic

```
37. const_iterator lower_bound(const key_type & x) const;
```

Returns: Allocator const iterator pointing to the first element with key not less than k, or a.end() if such an element is not found.

Complexity: Logarithmic

```
38. iterator upper_bound(const key_type & x);
```

Returns: An iterator pointing to the first element with key not less than x, or end() if such an element is not found.

Complexity: Logarithmic

```
39. const_iterator upper_bound(const key_type & x) const;
```

Returns: Allocator const iterator pointing to the first element with key not less than x, or end() if such an element is not found.

Complexity: Logarithmic

```
40. std::pair< iterator, iterator > equal_range(const key_type & x);
```

Effects: Equivalent to `std::make_pair(this->lower_bound(k), this->upper_bound(k))`.

Complexity: Logarithmic

```
41. std::pair< const_iterator, const_iterator >  
    equal_range(const key_type & x) const;
```

Effects: Equivalent to `std::make_pair(this->lower_bound(k), this->upper_bound(k))`.

Complexity: Logarithmic

Class template map

`boost::container::map`

Synopsis

```
// In header: <boost/container/container_fwd.hpp>

template<typename Key, typename T, typename Compare = std::less<Key>,
        typename Allocator = std::allocator<std::pair<const Key, T> > >
class map {
public:
    // construct/copy/destroy
    map();
    explicit map(const Compare &, const allocator_type & = allocator_type());
    template<typename InputIterator>
        map(InputIterator, InputIterator, const Compare & = Compare(),
            const allocator_type & = allocator_type());
    template<typename InputIterator>
        map(ordered_unique_range_t, InputIterator, InputIterator,
            const Compare & = Compare(),
            const allocator_type & = allocator_type());
    map(const map &);
    map(map &&);
    map(const map &, const allocator_type &);
    map(map &&, const allocator_type &);
    map& operator=(const map &);
    map& operator=(map &&);

    // public member functions
    allocator_type get_allocator() const;
    stored_allocator_type & get_stored_allocator();
    const stored_allocator_type & get_stored_allocator() const;
    iterator begin();
    const_iterator begin() const;
    iterator end();
    const_iterator end() const;
    reverse_iterator rbegin();
    const_reverse_iterator rbegin() const;
    reverse_iterator rend();
    const_reverse_iterator rend() const;
    const_iterator cbegin() const;
    const_iterator cend() const;
    const_reverse_iterator crbegin() const;
    const_reverse_iterator crend() const;
    bool empty() const;
    size_type size() const;
    size_type max_size() const;
    mapped_type & operator[](const key_type &);
    mapped_type & operator[](key_type &&);
    T & at(const key_type &);
    const T & at(const key_type &) const;
    std::pair< iterator, bool > insert(const value_type &);
    std::pair< iterator, bool > insert(const nonconst_value_type &);
    std::pair< iterator, bool > insert(nonconst_value_type &&);
    std::pair< iterator, bool > insert(movable_value_type &&);
    std::pair< iterator, bool > insert(value_type &&);
    iterator insert(const_iterator, const value_type &);
    iterator insert(const_iterator, nonconst_value_type &&);
    iterator insert(const_iterator, movable_value_type &&);
    iterator insert(const_iterator, const nonconst_value_type &);
    iterator insert(const_iterator, value_type &&);
    template<typename InputIterator> void insert(InputIterator, InputIterator);
    template<class... Args> std::pair< iterator, bool > emplace(Args &&...);
    template<class... Args> iterator emplace_hint(const_iterator, Args &&...);
    iterator erase(const_iterator);
```

```

size_type erase(const key_type &);
iterator erase(const_iterator, const_iterator);
void swap(map &);
void clear();
key_compare key_comp() const;
value_compare value_comp() const;
iterator find(const key_type &);
const_iterator find(const key_type &) const;
size_type count(const key_type &) const;
iterator lower_bound(const key_type &);
const_iterator lower_bound(const key_type &) const;
iterator upper_bound(const key_type &);
const_iterator upper_bound(const key_type &) const;
std::pair< iterator, iterator > equal_range(const key_type &);
std::pair< const_iterator, const_iterator >
equal_range(const key_type &) const;
};

```

Description

A map is a kind of associative container that supports unique keys (contains at most one of each key value) and provides for fast retrieval of values of another type T based on the keys. The map class supports bidirectional iterators.

A map satisfies all of the requirements of a container and of a reversible container and of an associative container. For a map<Key,T> the key_type is Key and the value_type is std::pair<const Key,T>.

Compare is the ordering function for Keys (e.g. *std::less<Key>*).

Allocator is the allocator to allocate the value_types (e.g. *allocator< std::pair<const Key, T> >*).

map public construct/copy/destroy

1.

```
map();
```

Effects: Default constructs an empty map.

Complexity: Constant.

2.

```
explicit map(const Compare & comp,
            const allocator_type & a = allocator_type());
```

Effects: Constructs an empty map using the specified comparison object and allocator.

Complexity: Constant.

3.

```
template<typename InputIterator>
map(InputIterator first, InputIterator last,
    const Compare & comp = Compare(),
    const allocator_type & a = allocator_type());
```

Effects: Constructs an empty map using the specified comparison object and allocator, and inserts elements from the range [first, last).

Complexity: Linear in N if the range [first, last) is already sorted using comp and otherwise N logN, where N is last - first.

```
4. template<typename InputIterator>
   map(ordered_unique_range_t, InputIterator first, InputIterator last,
       const Compare & comp = Compare(),
       const allocator_type & a = allocator_type());
```

Effects: Constructs an empty map using the specified comparison object and allocator, and inserts elements from the ordered unique range [first ,last). This function is more efficient than the normal range creation for ordered ranges.

Requires: [first ,last) must be ordered according to the predicate and must be unique values.

Complexity: Linear in N.

```
5. map(const map & x);
```

Effects: Copy constructs a map.

Complexity: Linear in x.size().

```
6. map(map && x);
```

Effects: Move constructs a map. Constructs *this using x's resources.

Complexity: Constant.

Postcondition: x is emptied.

```
7. map(const map & x, const allocator_type & a);
```

Effects: Copy constructs a map using the specified allocator.

Complexity: Linear in x.size().

```
8. map(map && x, const allocator_type & a);
```

Effects: Move constructs a map using the specified allocator. Constructs *this using x's resources.

Complexity: Constant if x == x.get_allocator(), linear otherwise.

Postcondition: x is emptied.

```
9. map& operator=(const map & x);
```

Effects: Makes *this a copy of x.

Complexity: Linear in x.size().

```
10. map& operator=(map && x);
```

Effects: this->swap(x.get()).

Complexity: Constant.

map public member functions

```
1. allocator_type get_allocator() const;
```

Effects: Returns a copy of the Allocator that was passed to the object's constructor.

Complexity: Constant.

2.

```
stored_allocator_type & get_stored_allocator();
```

Effects: Returns a reference to the internal allocator.

Throws: Nothing

Complexity: Constant.

Note: Non-standard extension.

3.

```
const stored_allocator_type & get_stored_allocator() const;
```

Effects: Returns a reference to the internal allocator.

Throws: Nothing

Complexity: Constant.

Note: Non-standard extension.

4.

```
iterator begin();
```

Effects: Returns an iterator to the first element contained in the container.

Throws: Nothing.

Complexity: Constant.

5.

```
const_iterator begin() const;
```

Effects: Returns a const_iterator to the first element contained in the container.

Throws: Nothing.

Complexity: Constant.

6.

```
iterator end();
```

Effects: Returns an iterator to the end of the container.

Throws: Nothing.

Complexity: Constant.

7.

```
const_iterator end() const;
```

Effects: Returns a const_iterator to the end of the container.

Throws: Nothing.

Complexity: Constant.

8.

```
reverse_iterator rbegin();
```

Effects: Returns a reverse_iterator pointing to the beginning of the reversed container.

Throws: Nothing.

Complexity: Constant.

9.

```
const_reverse_iterator rbegin() const;
```

Effects: Returns a const_reverse_iterator pointing to the beginning of the reversed container.

Throws: Nothing.

Complexity: Constant.

10.

```
reverse_iterator rend();
```

Effects: Returns a reverse_iterator pointing to the end of the reversed container.

Throws: Nothing.

Complexity: Constant.

11.

```
const_reverse_iterator rend() const;
```

Effects: Returns a const_reverse_iterator pointing to the end of the reversed container.

Throws: Nothing.

Complexity: Constant.

12.

```
const_iterator cbegin() const;
```

Effects: Returns a const_iterator to the first element contained in the container.

Throws: Nothing.

Complexity: Constant.

13.

```
const_iterator cend() const;
```

Effects: Returns a const_iterator to the end of the container.

Throws: Nothing.

Complexity: Constant.

14.

```
const_reverse_iterator crbegin() const;
```

Effects: Returns a const_reverse_iterator pointing to the beginning of the reversed container.

Throws: Nothing.

Complexity: Constant.

```
15. const_reverse_iterator crend() const;
```

Effects: Returns a `const_reverse_iterator` pointing to the end of the reversed container.

Throws: Nothing.

Complexity: Constant.

```
16. bool empty() const;
```

Effects: Returns true if the container contains no elements.

Throws: Nothing.

Complexity: Constant.

```
17. size_type size() const;
```

Effects: Returns the number of the elements contained in the container.

Throws: Nothing.

Complexity: Constant.

```
18. size_type max_size() const;
```

Effects: Returns the largest possible size of the container.

Throws: Nothing.

Complexity: Constant.

```
19. mapped_type & operator[](const key_type & k);
```

Effects: If there is no key equivalent to `x` in the map, inserts `value_type(x, T())` into the map.

Returns: Allocator reference to the `mapped_type` corresponding to `x` in `*this`.

Complexity: Logarithmic.

```
20. mapped_type & operator[](key_type && k);
```

Effects: If there is no key equivalent to `x` in the map, inserts `value_type(boost::move(x), T())` into the map (the key is move-constructed)

Returns: Allocator reference to the `mapped_type` corresponding to `x` in `*this`.

Complexity: Logarithmic.

```
21. T & at(const key_type & k);
```

Returns: Allocator reference to the element whose key is equivalent to `x`. **Throws:** An exception object of type `out_of_range` if no such element is present. **Complexity:** logarithmic.

```
22. const T & at(const key_type & k) const;
```

Returns: Allocator reference to the element whose key is equivalent to x. **Throws:** An exception object of type out_of_range if no such element is present. **Complexity:** logarithmic.

```
23. std::pair< iterator, bool > insert(const value_type & x);
```

Effects: Inserts x if and only if there is no element in the container with key equivalent to the key of x.

Returns: The bool component of the returned pair is true if and only if the insertion takes place, and the iterator component of the pair points to the element with key equivalent to the key of x.

Complexity: Logarithmic.

```
24. std::pair< iterator, bool > insert(const nonconst_value_type & x);
```

Effects: Inserts a new value_type created from the pair if and only if there is no element in the container with key equivalent to the key of x.

Returns: The bool component of the returned pair is true if and only if the insertion takes place, and the iterator component of the pair points to the element with key equivalent to the key of x.

Complexity: Logarithmic.

```
25. std::pair< iterator, bool > insert(nonconst_value_type && x);
```

Effects: Inserts a new value_type move constructed from the pair if and only if there is no element in the container with key equivalent to the key of x.

Returns: The bool component of the returned pair is true if and only if the insertion takes place, and the iterator component of the pair points to the element with key equivalent to the key of x.

Complexity: Logarithmic.

```
26. std::pair< iterator, bool > insert(movable_value_type && x);
```

Effects: Inserts a new value_type move constructed from the pair if and only if there is no element in the container with key equivalent to the key of x.

Returns: The bool component of the returned pair is true if and only if the insertion takes place, and the iterator component of the pair points to the element with key equivalent to the key of x.

Complexity: Logarithmic.

```
27. std::pair< iterator, bool > insert(value_type && x);
```

Effects: Move constructs a new value from x if and only if there is no element in the container with key equivalent to the key of x.

Returns: The bool component of the returned pair is true if and only if the insertion takes place, and the iterator component of the pair points to the element with key equivalent to the key of x.

Complexity: Logarithmic.

```
28. iterator insert(const_iterator position, const value_type & x);
```

Effects: Inserts a copy of `x` in the container if and only if there is no element in the container with key equivalent to the key of `x`. `p` is a hint pointing to where the insert should start to search.

Returns: An iterator pointing to the element with key equivalent to the key of `x`.

Complexity: Logarithmic in general, but amortized constant if `t` is inserted right before `p`.

29.

```
iterator insert(const_iterator position, nonconst_value_type && x);
```

Effects: Move constructs a new value from `x` if and only if there is no element in the container with key equivalent to the key of `x`. `p` is a hint pointing to where the insert should start to search.

Returns: An iterator pointing to the element with key equivalent to the key of `x`.

Complexity: Logarithmic in general, but amortized constant if `t` is inserted right before `p`.

30.

```
iterator insert(const_iterator position, movable_value_type && x);
```

Effects: Move constructs a new value from `x` if and only if there is no element in the container with key equivalent to the key of `x`. `p` is a hint pointing to where the insert should start to search.

Returns: An iterator pointing to the element with key equivalent to the key of `x`.

Complexity: Logarithmic in general, but amortized constant if `t` is inserted right before `p`.

31.

```
iterator insert(const_iterator position, const nonconst_value_type & x);
```

Effects: Inserts a copy of `x` in the container. `p` is a hint pointing to where the insert should start to search.

Returns: An iterator pointing to the element with key equivalent to the key of `x`.

Complexity: Logarithmic.

32.

```
iterator insert(const_iterator position, value_type && x);
```

Effects: Inserts an element move constructed from `x` in the container. `p` is a hint pointing to where the insert should start to search.

Returns: An iterator pointing to the element with key equivalent to the key of `x`.

Complexity: Logarithmic.

33.

```
template<typename InputIterator>
void insert(InputIterator first, InputIterator last);
```

Requires: `first`, `last` are not iterators into `*this`.

Effects: inserts each element from the range `[first,last)` if and only if there is no element with key equivalent to the key of that element.

Complexity: At most $N \log(\text{size}()+N)$ (N is the distance from `first` to `last`)

34.

```
template<class... Args> std::pair< iterator, bool > emplace(Args &&... args);
```

Effects: Inserts an object `x` of type `T` constructed with `std::forward<Args>(args)...` in the container if and only if there is no element in the container with an equivalent key. `p` is a hint pointing to where the insert should start to search.

Returns: The bool component of the returned pair is true if and only if the insertion takes place, and the iterator component of the pair points to the element with key equivalent to the key of x.

Complexity: Logarithmic in general, but amortized constant if t is inserted right before p.

```
35. template<class... Args>
    iterator emplace_hint(const_iterator hint, Args &&... args);
```

Effects: Inserts an object of type T constructed with `std::forward<Args>(args)...` in the container if and only if there is no element in the container with an equivalent key. p is a hint pointing to where the insert should start to search.

Returns: An iterator pointing to the element with key equivalent to the key of x.

Complexity: Logarithmic in general, but amortized constant if t is inserted right before p.

```
36. iterator erase(const_iterator position);
```

Effects: Erases the element pointed to by position.

Returns: Returns an iterator pointing to the element immediately following q prior to the element being erased. If no such element exists, returns end().

Complexity: Amortized constant time

```
37. size_type erase(const key_type & x);
```

Effects: Erases all elements in the container with key equivalent to x.

Returns: Returns the number of erased elements.

Complexity: $\log(\text{size}()) + \text{count}(k)$

```
38. iterator erase(const_iterator first, const_iterator last);
```

Effects: Erases all the elements in the range [first, last).

Returns: Returns last.

Complexity: $\log(\text{size}()) + N$ where N is the distance from first to last.

```
39. void swap(map & x);
```

Effects: Swaps the contents of *this and x.

Throws: Nothing.

Complexity: Constant.

```
40. void clear();
```

Effects: `erase(a.begin(), a.end())`.

Postcondition: `size() == 0`.

Complexity: linear in `size()`.

```
41. key_compare key_comp() const;
```

Effects: Returns the comparison object out of which a was constructed.

Complexity: Constant.

```
42. value_compare value_comp() const;
```

Effects: Returns an object of value_compare constructed out of the comparison object.

Complexity: Constant.

```
43. iterator find(const key_type & x);
```

Returns: An iterator pointing to an element with the key equivalent to x, or end() if such an element is not found.

Complexity: Logarithmic.

```
44. const_iterator find(const key_type & x) const;
```

Returns: Allocator const_iterator pointing to an element with the key equivalent to x, or end() if such an element is not found.

Complexity: Logarithmic.

```
45. size_type count(const key_type & x) const;
```

Returns: The number of elements with key equivalent to x.

Complexity: $\log(\text{size}()) + \text{count}(k)$

```
46. iterator lower_bound(const key_type & x);
```

Returns: An iterator pointing to the first element with key not less than k, or a.end() if such an element is not found.

Complexity: Logarithmic

```
47. const_iterator lower_bound(const key_type & x) const;
```

Returns: Allocator const iterator pointing to the first element with key not less than k, or a.end() if such an element is not found.

Complexity: Logarithmic

```
48. iterator upper_bound(const key_type & x);
```

Returns: An iterator pointing to the first element with key not less than x, or end() if such an element is not found.

Complexity: Logarithmic

```
49. const_iterator upper_bound(const key_type & x) const;
```

Returns: Allocator const iterator pointing to the first element with key not less than x, or end() if such an element is not found.

Complexity: Logarithmic

```
50. std::pair< iterator, iterator > equal_range(const key_type & x);
```

Effects: Equivalent to `std::make_pair(this->lower_bound(k), this->upper_bound(k))`.

Complexity: Logarithmic

```
51. std::pair< const_iterator, const_iterator >
    equal_range(const key_type & x) const;
```

Effects: Equivalent to `std::make_pair(this->lower_bound(k), this->upper_bound(k))`.

Complexity: Logarithmic

Class template multimap

`boost::container::multimap`

Synopsis

```
// In header: <boost/container/container_fwd.hpp>

template<typename Key, typename T, typename Compare = std::less<Key>,
         typename Allocator = std::allocator<std::pair<const Key, T> > >
class multimap {
public:
    // construct/copy/destroy
    multimap();
    explicit multimap(const Compare &,
                     const allocator_type & = allocator_type());
    template<typename InputIterator>
        multimap(InputIterator, InputIterator, const Compare & = Compare(),
                 const allocator_type & = allocator_type());
    template<typename InputIterator>
        multimap(ordered_range_t, InputIterator, InputIterator,
                 const Compare & = Compare(),
                 const allocator_type & = allocator_type());
    multimap(const multimap &);
    multimap(multimap &&);
    multimap(const multimap &, const allocator_type &);
    multimap(multimap &&, const allocator_type &);
    multimap& operator=(const multimap &);
    multimap& operator=(multimap &&);

    // public member functions
    allocator_type get_allocator() const;
    stored_allocator_type & get_stored_allocator();
    const stored_allocator_type & get_stored_allocator() const;
    iterator begin();
    const_iterator begin() const;
    iterator end();
    const_iterator end() const;
    reverse_iterator rbegin();
    const_reverse_iterator rbegin() const;
    reverse_iterator rend();
    const_reverse_iterator rend() const;
    const_iterator cbegin() const;
    const_iterator cend() const;
    const_reverse_iterator crbegin() const;
    const_reverse_iterator crend() const;
```

```

bool empty() const;
size_type size() const;
size_type max_size() const;
template<class... Args> iterator emplace(Args &&...);
template<class... Args> iterator emplace_hint(const_iterator, Args &&...);
iterator insert(const value_type &);
iterator insert(const nonconst_value_type &);
iterator insert(nonconst_value_type &&);
iterator insert(movable_value_type &&);
iterator insert(const_iterator, const value_type &);
iterator insert(const_iterator, const nonconst_value_type &);
iterator insert(const_iterator, nonconst_value_type &&);
iterator insert(const_iterator, movable_value_type &&);
template<typename InputIterator> void insert(InputIterator, InputIterator);
iterator erase(const_iterator);
size_type erase(const key_type &);
iterator erase(const_iterator, const_iterator);
void swap(multimap &);
void clear();
key_compare key_comp() const;
value_compare value_comp() const;
iterator find(const key_type &);
const_iterator find(const key_type &) const;
size_type count(const key_type &) const;
iterator lower_bound(const key_type &);
const_iterator lower_bound(const key_type &) const;
iterator upper_bound(const key_type &);
const_iterator upper_bound(const key_type &) const;
std::pair< iterator, iterator > equal_range(const key_type &);
std::pair< const_iterator, const_iterator >
equal_range(const key_type &) const;
};

```

Description

A multimap is a kind of associative container that supports equivalent keys (possibly containing multiple copies of the same key value) and provides for fast retrieval of values of another type T based on the keys. The multimap class supports bidirectional iterators.

A multimap satisfies all of the requirements of a container and of a reversible container and of an associative container. For a `map<Key,T>` the `key_type` is `Key` and the `value_type` is `std::pair<const Key,T>`.

`Compare` is the ordering function for Keys (e.g. `std::less<Key>`).

`Allocator` is the allocator to allocate the `value_types` (e.g. `allocator< std::pair<const Key, T> >`).

multimap public construct/copy/destroy

1. `multimap();`

Effects: Default constructs an empty multimap.

Complexity: Constant.

2. `explicit multimap(const Compare & comp,
 const allocator_type & a = allocator_type());`

Effects: Constructs an empty multimap using the specified comparison object and allocator.

Complexity: Constant.

```
3. template<typename InputIterator>
    multimap(InputIterator first, InputIterator last,
            const Compare & comp = Compare(),
            const allocator_type & a = allocator_type());
```

Effects: Constructs an empty multimap using the specified comparison object and allocator, and inserts elements from the range [first ,last).

Complexity: Linear in N if the range [first ,last) is already sorted using comp and otherwise $N \log N$, where N is last - first.

```
4. template<typename InputIterator>
    multimap(ordered_range_t, InputIterator first, InputIterator last,
            const Compare & comp = Compare(),
            const allocator_type & a = allocator_type());
```

Effects: Constructs an empty multimap using the specified comparison object and allocator, and inserts elements from the ordered range [first ,last). This function is more efficient than the normal range creation for ordered ranges.

Requires: [first ,last) must be ordered according to the predicate.

Complexity: Linear in N.

```
5. multimap(const multimap & x);
```

Effects: Copy constructs a multimap.

Complexity: Linear in x.size().

```
6. multimap(multimap && x);
```

Effects: Move constructs a multimap. Constructs *this using x's resources.

Complexity: Constant.

Postcondition: x is emptied.

```
7. multimap(const multimap & x, const allocator_type & a);
```

Effects: Copy constructs a multimap.

Complexity: Linear in x.size().

```
8. multimap(multimap && x, const allocator_type & a);
```

Effects: Move constructs a multimap using the specified allocator. Constructs *this using x's resources. **Complexity:** Constant if `a == x.get_allocator()`, linear otherwise.

Postcondition: x is emptied.

```
9. multimap& operator=(const multimap & x);
```

Effects: Makes *this a copy of x.

Complexity: Linear in x.size().

10. `multimap& operator=(multimap && x);`

Effects: this->swap(x.get()).

Complexity: Constant.

`multimap` public member functions

1. `allocator_type get_allocator() const;`

Effects: Returns a copy of the Allocator that was passed to the object's constructor.

Complexity: Constant.

2. `stored_allocator_type & get_stored_allocator();`

Effects: Returns a reference to the internal allocator.

Throws: Nothing

Complexity: Constant.

Note: Non-standard extension.

3. `const stored_allocator_type & get_stored_allocator() const;`

Effects: Returns a reference to the internal allocator.

Throws: Nothing

Complexity: Constant.

Note: Non-standard extension.

4. `iterator begin();`

Effects: Returns an iterator to the first element contained in the container.

Throws: Nothing.

Complexity: Constant.

5. `const_iterator begin() const;`

Effects: Returns a `const_iterator` to the first element contained in the container.

Throws: Nothing.

Complexity: Constant.

6. `iterator end();`

Effects: Returns an iterator to the end of the container.

Throws: Nothing.

Complexity: Constant.

7.

```
const_iterator end() const;
```

Effects: Returns a `const_iterator` to the end of the container.

Throws: Nothing.

Complexity: Constant.

8.

```
reverse_iterator rbegin();
```

Effects: Returns a `reverse_iterator` pointing to the beginning of the reversed container.

Throws: Nothing.

Complexity: Constant.

9.

```
const_reverse_iterator rbegin() const;
```

Effects: Returns a `const_reverse_iterator` pointing to the beginning of the reversed container.

Throws: Nothing.

Complexity: Constant.

10.

```
reverse_iterator rend();
```

Effects: Returns a `reverse_iterator` pointing to the end of the reversed container.

Throws: Nothing.

Complexity: Constant.

11.

```
const_reverse_iterator rend() const;
```

Effects: Returns a `const_reverse_iterator` pointing to the end of the reversed container.

Throws: Nothing.

Complexity: Constant.

12.

```
const_iterator cbegin() const;
```

Effects: Returns a `const_iterator` to the first element contained in the container.

Throws: Nothing.

Complexity: Constant.

13.

```
const_iterator cend() const;
```

Effects: Returns a `const_iterator` to the end of the container.

Throws: Nothing.

Complexity: Constant.

```
14. const_reverse_iterator crbegin() const;
```

Effects: Returns a `const_reverse_iterator` pointing to the beginning of the reversed container.

Throws: Nothing.

Complexity: Constant.

```
15. const_reverse_iterator crend() const;
```

Effects: Returns a `const_reverse_iterator` pointing to the end of the reversed container.

Throws: Nothing.

Complexity: Constant.

```
16. bool empty() const;
```

Effects: Returns true if the container contains no elements.

Throws: Nothing.

Complexity: Constant.

```
17. size_type size() const;
```

Effects: Returns the number of the elements contained in the container.

Throws: Nothing.

Complexity: Constant.

```
18. size_type max_size() const;
```

Effects: Returns the largest possible size of the container.

Throws: Nothing.

Complexity: Constant.

```
19. template<class... Args> iterator emplace(Args &&... args);
```

Effects: Inserts an object of type `T` constructed with `std::forward<Args>(args)...` in the container. `p` is a hint pointing to where the insert should start to search.

Returns: An iterator pointing to the element with key equivalent to the key of `x`.

Complexity: Logarithmic in general, but amortized constant if `t` is inserted right before `p`.

```
20. template<class... Args>
    iterator emplace_hint(const_iterator hint, Args &&... args);
```

Effects: Inserts an object of type T constructed with `std::forward<Args>(args)...` in the container. `p` is a hint pointing to where the insert should start to search.

Returns: An iterator pointing to the element with key equivalent to the key of `x`.

Complexity: Logarithmic in general, but amortized constant if `t` is inserted right before `p`.

21.

```
iterator insert(const value_type & x);
```

Effects: Inserts `x` and returns the iterator pointing to the newly inserted element.

Complexity: Logarithmic.

22.

```
iterator insert(const nonconst_value_type & x);
```

Effects: Inserts a new value constructed from `x` and returns the iterator pointing to the newly inserted element.

Complexity: Logarithmic.

23.

```
iterator insert(nonconst_value_type && x);
```

Effects: Inserts a new value move-constructed from `x` and returns the iterator pointing to the newly inserted element.

Complexity: Logarithmic.

24.

```
iterator insert(movable_value_type && x);
```

Effects: Inserts a new value move-constructed from `x` and returns the iterator pointing to the newly inserted element.

Complexity: Logarithmic.

25.

```
iterator insert(const_iterator position, const value_type & x);
```

Effects: Inserts a copy of `x` in the container. `p` is a hint pointing to where the insert should start to search.

Returns: An iterator pointing to the element with key equivalent to the key of `x`.

Complexity: Logarithmic in general, but amortized constant if `t` is inserted right before `p`.

26.

```
iterator insert(const_iterator position, const nonconst_value_type & x);
```

Effects: Inserts a new value constructed from `x` in the container. `p` is a hint pointing to where the insert should start to search.

Returns: An iterator pointing to the element with key equivalent to the key of `x`.

Complexity: Logarithmic in general, but amortized constant if `t` is inserted right before `p`.

27.

```
iterator insert(const_iterator position, nonconst_value_type && x);
```

Effects: Inserts a new value move constructed from `x` in the container. `p` is a hint pointing to where the insert should start to search.

Returns: An iterator pointing to the element with key equivalent to the key of `x`.

Complexity: Logarithmic in general, but amortized constant if `t` is inserted right before `p`.

```
28. iterator insert(const_iterator position, movable_value_type && x);
```

Effects: Inserts a new value move constructed from x in the container. p is a hint pointing to where the insert should start to search.

Returns: An iterator pointing to the element with key equivalent to the key of x.

Complexity: Logarithmic in general, but amortized constant if t is inserted right before p.

```
29. template<typename InputIterator>
    void insert(InputIterator first, InputIterator last);
```

Requires: first, last are not iterators into *this.

Effects: inserts each element from the range [first,last) .

Complexity: At most $N \log(\text{size}()+N)$ (N is the distance from first to last)

```
30. iterator erase(const_iterator position);
```

Effects: Erases the element pointed to by position.

Returns: Returns an iterator pointing to the element immediately following q prior to the element being erased. If no such element exists, returns end().

Complexity: Amortized constant time

```
31. size_type erase(const key_type & x);
```

Effects: Erases all elements in the container with key equivalent to x.

Returns: Returns the number of erased elements.

Complexity: $\log(\text{size}()) + \text{count}(k)$

```
32. iterator erase(const_iterator first, const_iterator last);
```

Effects: Erases all the elements in the range [first, last).

Returns: Returns last.

Complexity: $\log(\text{size}()+N)$ where N is the distance from first to last.

```
33. void swap(multimap & x);
```

Effects: Swaps the contents of *this and x.

Throws: Nothing.

Complexity: Constant.

```
34. void clear();
```

Effects: erase(a.begin(),a.end()).

Postcondition: size() == 0.

Complexity: linear in size().

```
35. key_compare key_comp() const;
```

Effects: Returns the comparison object out of which a was constructed.

Complexity: Constant.

```
36. value_compare value_comp() const;
```

Effects: Returns an object of value_compare constructed out of the comparison object.

Complexity: Constant.

```
37. iterator find(const key_type & x);
```

Returns: An iterator pointing to an element with the key equivalent to x, or end() if such an element is not found.

Complexity: Logarithmic.

```
38. const_iterator find(const key_type & x) const;
```

Returns: Allocator const iterator pointing to an element with the key equivalent to x, or end() if such an element is not found.

Complexity: Logarithmic.

```
39. size_type count(const key_type & x) const;
```

Returns: The number of elements with key equivalent to x.

Complexity: log(size()+count(k))

```
40. iterator lower_bound(const key_type & x);
```

Returns: An iterator pointing to the first element with key not less than k, or a.end() if such an element is not found.

Complexity: Logarithmic

```
41. const_iterator lower_bound(const key_type & x) const;
```

Returns: Allocator const iterator pointing to the first element with key not less than k, or a.end() if such an element is not found.

Complexity: Logarithmic

```
42. iterator upper_bound(const key_type & x);
```

Returns: An iterator pointing to the first element with key not less than x, or end() if such an element is not found.

Complexity: Logarithmic

```
43. const_iterator upper_bound(const key_type & x) const;
```

Returns: Allocator const iterator pointing to the first element with key not less than `x`, or `end()` if such an element is not found.

Complexity: Logarithmic

```
44. std::pair< iterator, iterator > equal_range(const key_type & x);
```

Effects: Equivalent to `std::make_pair(this->lower_bound(k), this->upper_bound(k))`.

Complexity: Logarithmic

```
45. std::pair< const_iterator, const_iterator >  
    equal_range(const key_type & x) const;
```

Effects: Equivalent to `std::make_pair(this->lower_bound(k), this->upper_bound(k))`.

Complexity: Logarithmic

Class template `flat_set`

`boost::container::flat_set`

Synopsis

```
// In header: <boost/container/container_fwd.hpp>

template<typename Key, typename Compare = std::less<Key>,
        typename Allocator = std::allocator<Key> >
class flat_set {
public:
    // construct/copy/destroy
    explicit flat_set();
    explicit flat_set(const Compare &,
                    const allocator_type & = allocator_type());
    template<typename InputIterator>
        flat_set(InputIterator, InputIterator, const Compare & = Compare(),
                const allocator_type & = allocator_type());
    template<typename InputIterator>
        flat_set(ordered_unique_range_t, InputIterator, InputIterator,
                const Compare & = Compare(),
                const allocator_type & = allocator_type());
    flat_set(const flat_set &);
    flat_set(flat_set &&);
    flat_set(const flat_set &, const allocator_type &);
    flat_set(flat_set &&, const allocator_type &);
    flat_set& operator=(const flat_set &);
    flat_set& operator=(flat_set &&);

    // public member functions
    allocator_type get_allocator() const;
    stored_allocator_type & get_stored_allocator();
    const stored_allocator_type & get_stored_allocator() const;
    iterator begin();
    const_iterator begin() const;
    iterator end();
    const_iterator end() const;
    reverse_iterator rbegin();
    const_reverse_iterator rbegin() const;
    reverse_iterator rend();
    const_reverse_iterator rend() const;
    const_iterator cbegin() const;
    const_iterator cend() const;
    const_reverse_iterator crbegin() const;
    const_reverse_iterator crend() const;
    bool empty() const;
    size_type size() const;
    size_type max_size() const;
    size_type capacity() const;
    void reserve(size_type);
    void shrink_to_fit();
    template<class... Args> std::pair< iterator, bool > emplace(Args &&...);
    template<class... Args> iterator emplace_hint(const_iterator, Args &&...);
    std::pair< iterator, bool > insert(const value_type &);
    std::pair< iterator, bool > insert(value_type &&);
    iterator insert(const_iterator, const value_type &);
    iterator insert(const_iterator, value_type &&);
    template<typename InputIterator> void insert(InputIterator, InputIterator);
    template<typename InputIterator>
        void insert(ordered_unique_range_t, InputIterator, InputIterator);
    iterator erase(const_iterator);
    size_type erase(const key_type &);
    iterator erase(const_iterator, const_iterator);
    void swap(flat_set &);
    void clear();
};
```

```

key_compare key_comp() const;
value_compare value_comp() const;
iterator find(const key_type &);
const_iterator find(const key_type &) const;
size_type count(const key_type &) const;
iterator lower_bound(const key_type &);
const_iterator lower_bound(const key_type &) const;
iterator upper_bound(const key_type &);
const_iterator upper_bound(const key_type &) const;
std::pair< const_iterator, const_iterator >
equal_range(const key_type &) const;
std::pair< iterator, iterator > equal_range(const key_type &);
};

```

Description

`flat_set` is a Sorted Associative Container that stores objects of type `Key`. `flat_set` is a Simple Associative Container, meaning that its value type, as well as its key type, is `Key`. It is also a Unique Associative Container, meaning that no two elements are the same.

`flat_set` is similar to `std::set` but it's implemented like an ordered vector. This means that inserting a new element into a `flat_set` invalidates previous iterators and references

Erasing an element of a `flat_set` invalidates iterators and references pointing to elements that come after (their keys are bigger) the erased element.

`flat_set` public construct/copy/destroy

1.

```
explicit flat_set();
```

Effects: Default constructs an empty `flat_set`.

Complexity: Constant.

2.

```
explicit flat_set(const Compare & comp,
                 const allocator_type & a = allocator_type());
```

Effects: Constructs an empty `flat_set` using the specified comparison object and allocator.

Complexity: Constant.

3.

```
template<typename InputIterator>
flat_set(InputIterator first, InputIterator last,
         const Compare & comp = Compare(),
         const allocator_type & a = allocator_type());
```

Effects: Constructs an empty set using the specified comparison object and allocator, and inserts elements from the range `[first, last)`.

Complexity: Linear in N if the range `[first, last)` is already sorted using `comp` and otherwise $N \log N$, where N is `last - first`.

4.

```
template<typename InputIterator>
flat_set(ordered_unique_range_t, InputIterator first, InputIterator last,
         const Compare & comp = Compare(),
         const allocator_type & a = allocator_type());
```

Effects: Constructs an empty `flat_set` using the specified comparison object and allocator, and inserts elements from the ordered unique range `[first, last)`. This function is more efficient than the normal range creation for ordered ranges.

Requires: [first ,last) must be ordered according to the predicate and must be unique values.

Complexity: Linear in N.

Note: Non-standard extension.

5.

```
flat_set(const flat_set & x);
```

Effects: Copy constructs a set.

Complexity: Linear in x.size().

6.

```
flat_set(flat_set && mx);
```

Effects: Move constructs a set. Constructs *this using x's resources.

Complexity: Constant.

Postcondition: x is emptied.

7.

```
flat_set(const flat_set & x, const allocator_type & a);
```

Effects: Copy constructs a set using the specified allocator.

Complexity: Linear in x.size().

8.

```
flat_set(flat_set && mx, const allocator_type & a);
```

Effects: Move constructs a set using the specified allocator. Constructs *this using x's resources.

Complexity: Constant if a == mx.get_allocator(), linear otherwise

9.

```
flat_set& operator=(const flat_set & x);
```

Effects: Makes *this a copy of x.

Complexity: Linear in x.size().

10.

```
flat_set& operator=(flat_set && mx);
```

Effects: Makes *this a copy of the previous value of xx.

Complexity: Linear in x.size().

flat_set public member functions

1.

```
allocator_type get_allocator() const;
```

Effects: Returns a copy of the Allocator that was passed to the object's constructor.

Complexity: Constant.

2.

```
stored_allocator_type & get_stored_allocator();
```

Effects: Returns a reference to the internal allocator.

Throws: Nothing

Complexity: Constant.

Note: Non-standard extension.

3.

```
const stored_allocator_type & get_stored_allocator() const;
```

Effects: Returns a reference to the internal allocator.

Throws: Nothing

Complexity: Constant.

Note: Non-standard extension.

4.

```
iterator begin();
```

Effects: Returns an iterator to the first element contained in the container.

Throws: Nothing.

Complexity: Constant.

5.

```
const_iterator begin() const;
```

Effects: Returns a const_iterator to the first element contained in the container.

Throws: Nothing.

Complexity: Constant.

6.

```
iterator end();
```

Effects: Returns an iterator to the end of the container.

Throws: Nothing.

Complexity: Constant.

7.

```
const_iterator end() const;
```

Effects: Returns a const_iterator to the end of the container.

Throws: Nothing.

Complexity: Constant.

8.

```
reverse_iterator rbegin();
```

Effects: Returns a reverse_iterator pointing to the beginning of the reversed container.

Throws: Nothing.

Complexity: Constant.

9. `const_reverse_iterator rbegin() const;`

Effects: Returns a `const_reverse_iterator` pointing to the beginning of the reversed container.

Throws: Nothing.

Complexity: Constant.

10. `reverse_iterator rend();`

Effects: Returns a `reverse_iterator` pointing to the end of the reversed container.

Throws: Nothing.

Complexity: Constant.

11. `const_reverse_iterator rend() const;`

Effects: Returns a `const_reverse_iterator` pointing to the end of the reversed container.

Throws: Nothing.

Complexity: Constant.

12. `const_iterator cbegin() const;`

Effects: Returns a `const_iterator` to the first element contained in the container.

Throws: Nothing.

Complexity: Constant.

13. `const_iterator cend() const;`

Effects: Returns a `const_iterator` to the end of the container.

Throws: Nothing.

Complexity: Constant.

14. `const_reverse_iterator crbegin() const;`

Effects: Returns a `const_reverse_iterator` pointing to the beginning of the reversed container.

Throws: Nothing.

Complexity: Constant.

15. `const_reverse_iterator crend() const;`

Effects: Returns a `const_reverse_iterator` pointing to the end of the reversed container.

Throws: Nothing.

Complexity: Constant.

```
16. bool empty() const;
```

Effects: Returns true if the container contains no elements.

Throws: Nothing.

Complexity: Constant.

```
17. size_type size() const;
```

Effects: Returns the number of the elements contained in the container.

Throws: Nothing.

Complexity: Constant.

```
18. size_type max_size() const;
```

Effects: Returns the largest possible size of the container.

Throws: Nothing.

Complexity: Constant.

```
19. size_type capacity() const;
```

Effects: Number of elements for which memory has been allocated. `capacity()` is always greater than or equal to `size()`.

Throws: Nothing.

Complexity: Constant.

```
20. void reserve(size_type cnt);
```

Effects: If `n` is less than or equal to `capacity()`, this call has no effect. Otherwise, it is a request for allocation of additional memory. If the request is successful, then `capacity()` is greater than or equal to `n`; otherwise, `capacity()` is unchanged. In either case, `size()` is unchanged.

Throws: If memory allocation allocation throws or Key's copy constructor throws.

Note: If `capacity()` is less than "`cnt`", iterators and references to to values might be invalidated.

```
21. void shrink_to_fit();
```

Effects: Tries to deallocate the excess of memory created

Throws: If memory allocation throws, or Key's copy constructor throws.

Complexity: Linear to `size()`.

```
22. template<class... Args> std::pair< iterator, bool > emplace(Args &&... args);
```

Effects: Inserts an object `x` of type `Key` constructed with `std::forward<Args>(args)...` if and only if there is no element in the container with key equivalent to the key of `x`.

Returns: The bool component of the returned pair is true if and only if the insertion takes place, and the iterator component of the pair points to the element with key equivalent to the key of x.

Complexity: Logarithmic search time plus linear insertion to the elements with bigger keys than x.

Note: If an element is inserted it might invalidate elements.

23.

```
template<class... Args>
    iterator emplace_hint(const_iterator hint, Args &&... args);
```

Effects: Inserts an object of type Key constructed with `std::forward<Args>(args)...` in the container if and only if there is no element in the container with key equivalent to the key of x. p is a hint pointing to where the insert should start to search.

Returns: An iterator pointing to the element with key equivalent to the key of x.

Complexity: Logarithmic search time (constant if x is inserted right before p) plus insertion linear to the elements with bigger keys than x.

Note: If an element is inserted it might invalidate elements.

24.

```
std::pair< iterator, bool > insert(const value_type & x);
```

Effects: Inserts x if and only if there is no element in the container with key equivalent to the key of x.

Returns: The bool component of the returned pair is true if and only if the insertion takes place, and the iterator component of the pair points to the element with key equivalent to the key of x.

Complexity: Logarithmic search time plus linear insertion to the elements with bigger keys than x.

Note: If an element is inserted it might invalidate elements.

25.

```
std::pair< iterator, bool > insert(value_type && x);
```

Effects: Inserts a new value_type move constructed from the pair if and only if there is no element in the container with key equivalent to the key of x.

Returns: The bool component of the returned pair is true if and only if the insertion takes place, and the iterator component of the pair points to the element with key equivalent to the key of x.

Complexity: Logarithmic search time plus linear insertion to the elements with bigger keys than x.

Note: If an element is inserted it might invalidate elements.

26.

```
iterator insert(const_iterator p, const value_type & x);
```

Effects: Inserts a copy of x in the container if and only if there is no element in the container with key equivalent to the key of x. p is a hint pointing to where the insert should start to search.

Returns: An iterator pointing to the element with key equivalent to the key of x.

Complexity: Logarithmic search time (constant if x is inserted right before p) plus insertion linear to the elements with bigger keys than x.

Note: If an element is inserted it might invalidate elements.

27.

```
iterator insert(const_iterator position, value_type && x);
```

Effects: Inserts an element move constructed from `x` in the container. `p` is a hint pointing to where the insert should start to search.

Returns: An iterator pointing to the element with key equivalent to the key of `x`.

Complexity: Logarithmic search time (constant if `x` is inserted right before `p`) plus insertion linear to the elements with bigger keys than `x`.

Note: If an element is inserted it might invalidate elements.

```
28. template<typename InputIterator>
    void insert(InputIterator first, InputIterator last);
```

Requires: `first`, `last` are not iterators into `*this`.

Effects: inserts each element from the range `[first,last)` if and only if there is no element with key equivalent to the key of that element.

Complexity: At most $N \log(\text{size}()+N)$ (N is the distance from `first` to `last`) search time plus $N*\text{size}()$ insertion time.

Note: If an element is inserted it might invalidate elements.

```
29. template<typename InputIterator>
    void insert(ordered_unique_range_t, InputIterator first, InputIterator last);
```

Requires: `first`, `last` are not iterators into `*this` and must be ordered according to the predicate and must be unique values.

Effects: inserts each element from the range `[first,last)`. This function is more efficient than the normal range creation for ordered ranges.

Complexity: At most $N \log(\text{size}()+N)$ (N is the distance from `first` to `last`) search time plus $N*\text{size}()$ insertion time.

Note: Non-standard extension. If an element is inserted it might invalidate elements.

```
30. iterator erase(const_iterator position);
```

Effects: Erases the element pointed to by `position`.

Returns: Returns an iterator pointing to the element immediately following `q` prior to the element being erased. If no such element exists, returns `end()`.

Complexity: Linear to the elements with keys bigger than `position`

Note: Invalidates elements with keys not less than the erased element.

```
31. size_type erase(const key_type & x);
```

Effects: Erases all elements in the container with key equivalent to `x`.

Returns: Returns the number of erased elements.

Complexity: Logarithmic search time plus erasure time linear to the elements with bigger keys.

```
32. iterator erase(const_iterator first, const_iterator last);
```

Effects: Erases all the elements in the range `[first, last)`.

Returns: Returns `last`.

Complexity: $\text{size()} * N$ where N is the distance from first to last.

Complexity: Logarithmic search time plus erasure time linear to the elements with bigger keys.

```
33. void swap(flat_set & x);
```

Effects: Swaps the contents of *this and x.

Throws: Nothing.

Complexity: Constant.

```
34. void clear();
```

Effects: `erase(a.begin(),a.end())`.

Postcondition: `size() == 0`.

Complexity: linear in `size()`.

```
35. key_compare key_comp() const;
```

Effects: Returns the comparison object out of which a was constructed.

Complexity: Constant.

```
36. value_compare value_comp() const;
```

Effects: Returns an object of `value_compare` constructed out of the comparison object.

Complexity: Constant.

```
37. iterator find(const key_type & x);
```

Returns: An iterator pointing to an element with the key equivalent to x, or `end()` if such an element is not found.

Complexity: Logarithmic.

```
38. const_iterator find(const key_type & x) const;
```

Returns: Allocator `const_iterator` pointing to an element with the key equivalent to x, or `end()` if such an element is not found.

Complexity: Logarithmic.s

```
39. size_type count(const key_type & x) const;
```

Returns: The number of elements with key equivalent to x.

Complexity: $\log(\text{size}()) + \text{count}(k)$

```
40. iterator lower_bound(const key_type & x);
```

Returns: An iterator pointing to the first element with key not less than k, or `a.end()` if such an element is not found.

Complexity: Logarithmic

```
41. const_iterator lower_bound(const key_type & x) const;
```

Returns: Allocator const iterator pointing to the first element with key not less than k, or a.end() if such an element is not found.

Complexity: Logarithmic

```
42. iterator upper_bound(const key_type & x);
```

Returns: An iterator pointing to the first element with key not less than x, or end() if such an element is not found.

Complexity: Logarithmic

```
43. const_iterator upper_bound(const key_type & x) const;
```

Returns: Allocator const iterator pointing to the first element with key not less than x, or end() if such an element is not found.

Complexity: Logarithmic

```
44. std::pair< const_iterator, const_iterator >  
    equal_range(const key_type & x) const;
```

Effects: Equivalent to `std::make_pair(this->lower_bound(k), this->upper_bound(k))`.

Complexity: Logarithmic

```
45. std::pair< iterator, iterator > equal_range(const key_type & x);
```

Effects: Equivalent to `std::make_pair(this->lower_bound(k), this->upper_bound(k))`.

Complexity: Logarithmic

Class template flat_multiset

`boost::container::flat_multiset`

Synopsis

```
// In header: <boost/container/container_fwd.hpp>

template<typename Key, typename Compare = std::less<Key>,
        typename Allocator = std::allocator<Key> >
class flat_multiset {
public:
    // construct/copy/destroy
    explicit flat_multiset();
    explicit flat_multiset(const Compare &,
                          const allocator_type & = allocator_type());
    template<typename InputIterator>
        flat_multiset(InputIterator, InputIterator, const Compare & = Compare(),
                      const allocator_type & = allocator_type());
    template<typename InputIterator>
        flat_multiset(ordered_range_t, InputIterator, InputIterator,
                      const Compare & = Compare(),
                      const allocator_type & = allocator_type());
    flat_multiset(const flat_multiset &);
    flat_multiset(flat_multiset &&);
    flat_multiset(const flat_multiset &, const allocator_type &);
    flat_multiset(flat_multiset &&, const allocator_type &);
    flat_multiset& operator=(const flat_multiset &);
    flat_multiset& operator=(flat_multiset &&);

    // public member functions
    allocator_type get_allocator() const;
    stored_allocator_type & get_stored_allocator();
    const stored_allocator_type & get_stored_allocator() const;
    iterator begin();
    const_iterator begin() const;
    const_iterator cbegin() const;
    iterator end();
    const_iterator end() const;
    const_iterator cend() const;
    reverse_iterator rbegin();
    const_reverse_iterator rbegin() const;
    const_reverse_iterator crbegin() const;
    reverse_iterator rend();
    const_reverse_iterator rend() const;
    const_reverse_iterator crend() const;
    bool empty() const;
    size_type size() const;
    size_type max_size() const;
    size_type capacity() const;
    void reserve(size_type);
    void shrink_to_fit();
    template<class... Args> iterator emplace(Args &&...);
    template<class... Args> iterator emplace_hint(const_iterator, Args &&...);
    iterator insert(const value_type &);
    iterator insert(value_type &&);
    iterator insert(const_iterator, const value_type &);
    iterator insert(const_iterator, value_type &&);
    template<typename InputIterator> void insert(InputIterator, InputIterator);
    template<typename InputIterator>
        void insert(ordered_range_t, InputIterator, InputIterator);
    iterator erase(const_iterator);
    size_type erase(const key_type &);
    iterator erase(const_iterator, const_iterator);
    void swap(flat_multiset &);
    void clear();

```

```

key_compare key_comp() const;
value_compare value_comp() const;
iterator find(const key_type &);
const_iterator find(const key_type &) const;
size_type count(const key_type &) const;
iterator lower_bound(const key_type &);
const_iterator lower_bound(const key_type &) const;
iterator upper_bound(const key_type &);
const_iterator upper_bound(const key_type &) const;
std::pair< const_iterator, const_iterator >
equal_range(const key_type &) const;
std::pair< iterator, iterator > equal_range(const key_type &);
};

```

Description

`flat_multiset` is a Sorted Associative Container that stores objects of type Key. `flat_multiset` is a Simple Associative Container, meaning that its value type, as well as its key type, is Key. `flat_Multiset` can store multiple copies of the same key value.

`flat_multiset` is similar to `std::multiset` but it's implemented like an ordered vector. This means that inserting a new element into a `flat_multiset` invalidates previous iterators and references

Erasing an element of a `flat_multiset` invalidates iterators and references pointing to elements that come after (their keys are equal or bigger) the erased element.

`flat_multiset` public construct/copy/destroy

1.

```
explicit flat_multiset();
```

Effects: Default constructs an empty `flat_multiset`.

Complexity: Constant.

2.

```
explicit flat_multiset(const Compare & comp,
                      const allocator_type & a = allocator_type());
```

3.

```
template<typename InputIterator>
flat_multiset(InputIterator first, InputIterator last,
              const Compare & comp = Compare(),
              const allocator_type & a = allocator_type());
```

4.

```
template<typename InputIterator>
flat_multiset(ordered_range_t, InputIterator first, InputIterator last,
              const Compare & comp = Compare(),
              const allocator_type & a = allocator_type());
```

Effects: Constructs an empty `flat_multiset` using the specified comparison object and allocator, and inserts elements from the ordered range `[first ,last)`. This function is more efficient than the normal range creation for ordered ranges.

Requires: `[first ,last)` must be ordered according to the predicate.

Complexity: Linear in N.

Note: Non-standard extension.

5.

```
flat_multiset(const flat_multiset & x);
```

Effects: Copy constructs a `flat_multiset`.

Complexity: Linear in `x.size()`.

6.

```
flat_multiset(flat_multiset && mx);
```

Effects: Move constructs a `flat_multiset`. Constructs `*this` using `x`'s resources.

Complexity: Constant.

Postcondition: `x` is emptied.

7.

```
flat_multiset(const flat_multiset & x, const allocator_type & a);
```

Effects: Copy constructs a `flat_multiset` using the specified allocator.

Complexity: Linear in `x.size()`.

8.

```
flat_multiset(flat_multiset && mx, const allocator_type & a);
```

Effects: Move constructs a `flat_multiset` using the specified allocator. Constructs `*this` using `x`'s resources.

Complexity: Constant if `a == mx.get_allocator()`, linear otherwise

9.

```
flat_multiset& operator=(const flat_multiset & x);
```

Effects: Makes `*this` a copy of `x`.

Complexity: Linear in `x.size()`.

10.

```
flat_multiset& operator=(flat_multiset && mx);
```

Effects: Makes `*this` a copy of `x`.

Complexity: Linear in `x.size()`.

`flat_multiset` public member functions

1.

```
allocator_type get_allocator() const;
```

Effects: Returns a copy of the Allocator that was passed to the object's constructor.

Complexity: Constant.

2.

```
stored_allocator_type & get_stored_allocator();
```

Effects: Returns a reference to the internal allocator.

Throws: Nothing

Complexity: Constant.

Note: Non-standard extension.

3. `const stored_allocator_type & get_stored_allocator() const;`

Effects: Returns a reference to the internal allocator.

Throws: Nothing

Complexity: Constant.

Note: Non-standard extension.

4. `iterator begin();`

Effects: Returns an iterator to the first element contained in the container.

Throws: Nothing.

Complexity: Constant.

5. `const_iterator begin() const;`

Effects: Returns a `const_iterator` to the first element contained in the container.

Throws: Nothing.

Complexity: Constant.

6. `const_iterator cbegin() const;`

Effects: Returns a `const_iterator` to the first element contained in the container.

Throws: Nothing.

Complexity: Constant.

7. `iterator end();`

Effects: Returns an iterator to the end of the container.

Throws: Nothing.

Complexity: Constant.

8. `const_iterator end() const;`

Effects: Returns a `const_iterator` to the end of the container.

Throws: Nothing.

Complexity: Constant.

9. `const_iterator cend() const;`

Effects: Returns a `const_iterator` to the end of the container.

Throws: Nothing.

Complexity: Constant.

10.

```
reverse_iterator rbegin();
```

Effects: Returns a reverse_iterator pointing to the beginning of the reversed container.

Throws: Nothing.

Complexity: Constant.

11.

```
const_reverse_iterator rbegin() const;
```

Effects: Returns a const_reverse_iterator pointing to the beginning of the reversed container.

Throws: Nothing.

Complexity: Constant.

12.

```
const_reverse_iterator crbegin() const;
```

Effects: Returns a const_reverse_iterator pointing to the beginning of the reversed container.

Throws: Nothing.

Complexity: Constant.

13.

```
reverse_iterator rend();
```

Effects: Returns a reverse_iterator pointing to the end of the reversed container.

Throws: Nothing.

Complexity: Constant.

14.

```
const_reverse_iterator rend() const;
```

Effects: Returns a const_reverse_iterator pointing to the end of the reversed container.

Throws: Nothing.

Complexity: Constant.

15.

```
const_reverse_iterator crend() const;
```

Effects: Returns a const_reverse_iterator pointing to the end of the reversed container.

Throws: Nothing.

Complexity: Constant.

16.

```
bool empty() const;
```

Effects: Returns true if the container contains no elements.

Throws: Nothing.

Complexity: Constant.

```
17. size_type size() const;
```

Effects: Returns the number of the elements contained in the container.

Throws: Nothing.

Complexity: Constant.

```
18. size_type max_size() const;
```

Effects: Returns the largest possible size of the container.

Throws: Nothing.

Complexity: Constant.

```
19. size_type capacity() const;
```

Effects: Number of elements for which memory has been allocated. `capacity()` is always greater than or equal to `size()`.

Throws: Nothing.

Complexity: Constant.

```
20. void reserve(size_type cnt);
```

Effects: If `n` is less than or equal to `capacity()`, this call has no effect. Otherwise, it is a request for allocation of additional memory. If the request is successful, then `capacity()` is greater than or equal to `n`; otherwise, `capacity()` is unchanged. In either case, `size()` is unchanged.

Throws: If memory allocation allocation throws or Key's copy constructor throws.

Note: If `capacity()` is less than "`cnt`", iterators and references to to values might be invalidated.

```
21. void shrink_to_fit();
```

Effects: Tries to deallocate the excess of memory created

Throws: If memory allocation throws, or Key's copy constructor throws.

Complexity: Linear to `size()`.

```
22. template<class... Args> iterator emplace(Args &&... args);
```

Effects: Inserts an object of type Key constructed with `std::forward<Args>(args)...` and returns the iterator pointing to the newly inserted element.

Complexity: Logarithmic search time plus linear insertion to the elements with bigger keys than `x`.

Note: If an element is inserted it might invalidate elements.

```
23. template<class... Args>
    iterator emplace_hint(const_iterator hint, Args &&... args);
```

Effects: Inserts an object of type Key constructed with `std::forward<Args>(args)...` in the container. `p` is a hint pointing to where the insert should start to search.

Returns: An iterator pointing to the element with key equivalent to the key of `x`.

Complexity: Logarithmic search time (constant if `x` is inserted right before `p`) plus insertion linear to the elements with bigger keys than `x`.

Note: If an element is inserted it might invalidate elements.

```
24. iterator insert(const value_type & x);
```

Effects: Inserts `x` and returns the iterator pointing to the newly inserted element.

Complexity: Logarithmic search time plus linear insertion to the elements with bigger keys than `x`.

Note: If an element is inserted it might invalidate elements.

```
25. iterator insert(value_type && x);
```

Effects: Inserts a new `value_type` move constructed from `x` and returns the iterator pointing to the newly inserted element.

Complexity: Logarithmic search time plus linear insertion to the elements with bigger keys than `x`.

Note: If an element is inserted it might invalidate elements.

```
26. iterator insert(const_iterator p, const value_type & x);
```

Effects: Inserts a copy of `x` in the container. `p` is a hint pointing to where the insert should start to search.

Returns: An iterator pointing to the element with key equivalent to the key of `x`.

Complexity: Logarithmic search time (constant if `x` is inserted right before `p`) plus insertion linear to the elements with bigger keys than `x`.

Note: If an element is inserted it might invalidate elements.

```
27. iterator insert(const_iterator position, value_type && x);
```

Effects: Inserts a new `value` move constructed from `x` in the container. `p` is a hint pointing to where the insert should start to search.

Returns: An iterator pointing to the element with key equivalent to the key of `x`.

Complexity: Logarithmic search time (constant if `x` is inserted right before `p`) plus insertion linear to the elements with bigger keys than `x`.

Note: If an element is inserted it might invalidate elements.

```
28. template<typename InputIterator>
    void insert(InputIterator first, InputIterator last);
```

Requires: `first`, `last` are not iterators into `*this`.

Effects: inserts each element from the range `[first,last)`.

Complexity: At most $N \log(\text{size}()+N)$ (N is the distance from `first` to `last`) search time plus $N*\text{size}()$ insertion time.

Note: If an element is inserted it might invalidate elements.

```
29. template<typename InputIterator>
    void insert(ordered_range_t, InputIterator first, InputIterator last);
```

Requires: first, last are not iterators into *this and must be ordered according to the predicate.

Effects: inserts each element from the range [first,last) .This function is more efficient than the normal range creation for ordered ranges.

Complexity: At most $N \log(\text{size}()+N)$ (N is the distance from first to last) search time plus $N*\text{size}()$ insertion time.

Note: Non-standard extension. If an element is inserted it might invalidate elements.

```
30. iterator erase(const_iterator position);
```

Effects: Erases the element pointed to by position.

Returns: Returns an iterator pointing to the element immediately following q prior to the element being erased. If no such element exists, returns end().

Complexity: Linear to the elements with keys bigger than position

Note: Invalidates elements with keys not less than the erased element.

```
31. size_type erase(const key_type & x);
```

Effects: Erases all elements in the container with key equivalent to x.

Returns: Returns the number of erased elements.

Complexity: Logarithmic search time plus erasure time linear to the elements with bigger keys.

```
32. iterator erase(const_iterator first, const_iterator last);
```

Effects: Erases all the elements in the range [first, last).

Returns: Returns last.

Complexity: $\text{size()}*N$ where N is the distance from first to last.

Complexity: Logarithmic search time plus erasure time linear to the elements with bigger keys.

```
33. void swap(flat_multiset & x);
```

Effects: Swaps the contents of *this and x.

Throws: Nothing.

Complexity: Constant.

```
34. void clear();
```

Effects: erase(a.begin(),a.end()).

Postcondition: $\text{size}() == 0$.

Complexity: linear in size().

```
35. key_compare key_comp() const;
```

Effects: Returns the comparison object out of which a was constructed.

Complexity: Constant.

```
36. value_compare value_comp() const;
```

Effects: Returns an object of value_compare constructed out of the comparison object.

Complexity: Constant.

```
37. iterator find(const key_type & x);
```

Returns: An iterator pointing to an element with the key equivalent to x, or end() if such an element is not found.

Complexity: Logarithmic.

```
38. const_iterator find(const key_type & x) const;
```

Returns: Allocator const_iterator pointing to an element with the key equivalent to x, or end() if such an element is not found.

Complexity: Logarithmic.s

```
39. size_type count(const key_type & x) const;
```

Returns: The number of elements with key equivalent to x.

Complexity: log(size()+count(k)

```
40. iterator lower_bound(const key_type & x);
```

Returns: An iterator pointing to the first element with key not less than k, or a.end() if such an element is not found.

Complexity: Logarithmic

```
41. const_iterator lower_bound(const key_type & x) const;
```

Returns: Allocator const iterator pointing to the first element with key not less than k, or a.end() if such an element is not found.

Complexity: Logarithmic

```
42. iterator upper_bound(const key_type & x);
```

Returns: An iterator pointing to the first element with key not less than x, or end() if such an element is not found.

Complexity: Logarithmic

```
43. const_iterator upper_bound(const key_type & x) const;
```

Returns: Allocator const iterator pointing to the first element with key not less than x, or end() if such an element is not found.

Complexity: Logarithmic

```
44. std::pair< const_iterator, const_iterator >  
    equal_range(const key_type & x) const;
```

Effects: Equivalent to `std::make_pair(this->lower_bound(k), this->upper_bound(k))`.

Complexity: Logarithmic

```
45. std::pair< iterator, iterator > equal_range(const key_type & x);
```

Effects: Equivalent to `std::make_pair(this->lower_bound(k), this->upper_bound(k))`.

Complexity: Logarithmic

Class template `flat_map`

`boost::container::flat_map`

Synopsis

```
// In header: <boost/container/container_fwd.hpp>

template<typename Key, typename T, typename Compare = std::less<Key>,
        typename Allocator = std::allocator<std::pair<Key, T> > >
class flat_map {
public:
    // construct/copy/destruct
    flat_map();
    explicit flat_map(const Compare &,
                     const allocator_type & = allocator_type());
    template<typename InputIterator>
        flat_map(InputIterator, InputIterator, const Compare & = Compare(),
                 const allocator_type & = allocator_type());
    template<typename InputIterator>
        flat_map(ordered_unique_range_t, InputIterator, InputIterator,
                 const Compare & = Compare(),
                 const allocator_type & = allocator_type());
    flat_map(const flat_map &);
    flat_map(flat_map &&);
    flat_map(const flat_map &, const allocator_type &);
    flat_map(flat_map &&, const allocator_type &);
    flat_map& operator=(const flat_map &);
    flat_map& operator=(flat_map &&);

    // public member functions
    allocator_type get_allocator() const;
    stored_allocator_type & get_stored_allocator();
    const stored_allocator_type & get_stored_allocator() const;
    iterator begin();
    const_iterator begin() const;
    iterator end();
    const_iterator end() const;
    reverse_iterator rbegin();
    const_reverse_iterator rbegin() const;
    reverse_iterator rend();
    const_reverse_iterator rend() const;
    const_iterator cbegin() const;
    const_iterator cend() const;
    const_reverse_iterator crbegin() const;
    const_reverse_iterator crend() const;
    bool empty() const;
    size_type size() const;
    size_type max_size() const;
    size_type capacity() const;
    void reserve(size_type);
    void shrink_to_fit();
    mapped_type & operator[](const key_type &);
    mapped_type & operator[](key_type &&);
    T & at(const key_type &);
    const T & at(const key_type &) const;
    template<class... Args> std::pair< iterator, bool > emplace(Args &&...);
    template<class... Args> iterator emplace_hint(const_iterator, Args &&...);
    std::pair< iterator, bool > insert(const value_type &);
    std::pair< iterator, bool > insert(value_type &&);
    std::pair< iterator, bool > insert(movable_value_type &&);
    iterator insert(const_iterator, const value_type &);
    iterator insert(const_iterator, value_type &&);
    iterator insert(const_iterator, movable_value_type &&);
    template<typename InputIterator> void insert(InputIterator, InputIterator);
    template<typename InputIterator>
```

```

    void insert(ordered_unique_range_t, InputIterator, InputIterator);
    iterator erase(const_iterator);
    size_type erase(const key_type &);
    iterator erase(const_iterator, const_iterator);
    void swap(flat_map &);
    void clear();
    key_compare key_comp() const;
    value_compare value_comp() const;
    iterator find(const key_type &);
    const_iterator find(const key_type &) const;
    size_type count(const key_type &) const;
    iterator lower_bound(const key_type &);
    const_iterator lower_bound(const key_type &) const;
    iterator upper_bound(const key_type &);
    const_iterator upper_bound(const key_type &) const;
    std::pair< iterator, iterator > equal_range(const key_type &);
    std::pair< const_iterator, const_iterator >
    equal_range(const key_type &) const;
};

```

Description

A [flat_map](#) is a kind of associative container that supports unique keys (contains at most one of each key value) and provides for fast retrieval of values of another type T based on the keys. The [flat_map](#) class supports random-access iterators.

A [flat_map](#) satisfies all of the requirements of a container and of a reversible container and of an associative container. A [flat_map](#) also provides most operations described for unique keys. For a `flat_map<Key,T>` the `key_type` is `Key` and the `value_type` is `std::pair<Key,T>` (unlike `std::map<Key, T>` which `value_type` is `std::pair<const Key, T>`).

Compare is the ordering function for Keys (e.g. `std::less<Key>`).

Allocator is the allocator to allocate the `value_types` (e.g. `allocator< std::pair<Key, T> >`).

[flat_map](#) is similar to `std::map` but it's implemented like an ordered vector. This means that inserting a new element into a [flat_map](#) invalidates previous iterators and references

Erasing an element of a [flat_map](#) invalidates iterators and references pointing to elements that come after (their keys are bigger) the erased element.

flat_map public construct/copy/destroy

1.

```
flat_map();
```

Effects: Default constructs an empty [flat_map](#).

Complexity: Constant.

2.

```
explicit flat_map(const Compare & comp,
                 const allocator_type & a = allocator_type());
```

Effects: Constructs an empty [flat_map](#) using the specified comparison object and allocator.

Complexity: Constant.

3.

```
template<typename InputIterator>
flat_map(InputIterator first, InputIterator last,
         const Compare & comp = Compare(),
         const allocator_type & a = allocator_type());
```

Effects: Constructs an empty `flat_map` using the specified comparison object and allocator, and inserts elements from the range `[first ,last)`.

Complexity: Linear in N if the range `[first ,last)` is already sorted using `comp` and otherwise $N \log N$, where N is `last - first`.

```
4. template<typename InputIterator>
   flat_map(ordered_unique_range_t, InputIterator first, InputIterator last,
           const Compare & comp = Compare(),
           const allocator_type & a = allocator_type());
```

Effects: Constructs an empty `flat_map` using the specified comparison object and allocator, and inserts elements from the ordered unique range `[first ,last)`. This function is more efficient than the normal range creation for ordered ranges.

Requires: `[first ,last)` must be ordered according to the predicate and must be unique values.

Complexity: Linear in N .

Note: Non-standard extension.

```
5. flat_map(const flat_map & x);
```

Effects: Copy constructs a `flat_map`.

Complexity: Linear in `x.size()`.

```
6. flat_map(flat_map && x);
```

Effects: Move constructs a `flat_map`. Constructs `*this` using `x`'s resources.

Complexity: Constant.

Postcondition: `x` is emptied.

```
7. flat_map(const flat_map & x, const allocator_type & a);
```

Effects: Copy constructs a `flat_map` using the specified allocator.

Complexity: Linear in `x.size()`.

```
8. flat_map(flat_map && x, const allocator_type & a);
```

Effects: Move constructs a `flat_map` using the specified allocator. Constructs `*this` using `x`'s resources.

Complexity: Constant if `x.get_allocator() == a`, linear otherwise.

```
9. flat_map& operator=(const flat_map & x);
```

Effects: Makes `*this` a copy of `x`.

Complexity: Linear in `x.size()`.

```
10. flat_map& operator=(flat_map && mx);
```

Effects: Move constructs a `flat_map`. Constructs `*this` using `x`'s resources.

Complexity: Construct.

Postcondition: x is emptied.

`flat_map` public member functions

1.

```
allocator_type get_allocator() const;
```

Effects: Returns a copy of the Allocator that was passed to the object's constructor.

Complexity: Constant.

2.

```
stored_allocator_type & get_stored_allocator();
```

Effects: Returns a reference to the internal allocator.

Throws: Nothing

Complexity: Constant.

Note: Non-standard extension.

3.

```
const stored_allocator_type & get_stored_allocator() const;
```

Effects: Returns a reference to the internal allocator.

Throws: Nothing

Complexity: Constant.

Note: Non-standard extension.

4.

```
iterator begin();
```

Effects: Returns an iterator to the first element contained in the container.

Throws: Nothing.

Complexity: Constant.

5.

```
const_iterator begin() const;
```

Effects: Returns a `const_iterator` to the first element contained in the container.

Throws: Nothing.

Complexity: Constant.

6.

```
iterator end();
```

Effects: Returns an iterator to the end of the container.

Throws: Nothing.

Complexity: Constant.

7.

```
const_iterator end() const;
```

Effects: Returns a `const_iterator` to the end of the container.

Throws: Nothing.

Complexity: Constant.

8.

```
reverse_iterator rbegin();
```

Effects: Returns a `reverse_iterator` pointing to the beginning of the reversed container.

Throws: Nothing.

Complexity: Constant.

9.

```
const_reverse_iterator rbegin() const;
```

Effects: Returns a `const_reverse_iterator` pointing to the beginning of the reversed container.

Throws: Nothing.

Complexity: Constant.

10.

```
reverse_iterator rend();
```

Effects: Returns a `reverse_iterator` pointing to the end of the reversed container.

Throws: Nothing.

Complexity: Constant.

11.

```
const_reverse_iterator rend() const;
```

Effects: Returns a `const_reverse_iterator` pointing to the end of the reversed container.

Throws: Nothing.

Complexity: Constant.

12.

```
const_iterator cbegin() const;
```

Effects: Returns a `const_iterator` to the first element contained in the container.

Throws: Nothing.

Complexity: Constant.

13.

```
const_iterator cend() const;
```

Effects: Returns a `const_iterator` to the end of the container.

Throws: Nothing.

Complexity: Constant.

14.

```
const_reverse_iterator crbegin() const;
```

Effects: Returns a `const_reverse_iterator` pointing to the beginning of the reversed container.

Throws: Nothing.

Complexity: Constant.

```
15. const_reverse_iterator crend() const;
```

Effects: Returns a `const_reverse_iterator` pointing to the end of the reversed container.

Throws: Nothing.

Complexity: Constant.

```
16. bool empty() const;
```

Effects: Returns true if the container contains no elements.

Throws: Nothing.

Complexity: Constant.

```
17. size_type size() const;
```

Effects: Returns the number of the elements contained in the container.

Throws: Nothing.

Complexity: Constant.

```
18. size_type max_size() const;
```

Effects: Returns the largest possible size of the container.

Throws: Nothing.

Complexity: Constant.

```
19. size_type capacity() const;
```

Effects: Number of elements for which memory has been allocated. `capacity()` is always greater than or equal to `size()`.

Throws: Nothing.

Complexity: Constant.

```
20. void reserve(size_type cnt);
```

Effects: If `n` is less than or equal to `capacity()`, this call has no effect. Otherwise, it is a request for allocation of additional memory. If the request is successful, then `capacity()` is greater than or equal to `n`; otherwise, `capacity()` is unchanged. In either case, `size()` is unchanged.

Throws: If memory allocation allocation throws or `T`'s copy constructor throws.

Note: If `capacity()` is less than "`cnt`", iterators and references to to values might be invalidated.

21.

```
void shrink_to_fit();
```

Effects: Tries to deallocate the excess of memory created

Throws: If memory allocation throws, or T's copy constructor throws.

Complexity: Linear to size().

22.

```
mapped_type & operator[](const key_type & k);
```

Effects: If there is no key equivalent to x in the `flat_map`, inserts `value_type(x, T())` into the `flat_map`.

Returns: Allocator reference to the `mapped_type` corresponding to x in *this.

Complexity: Logarithmic.

23.

```
mapped_type & operator[](key_type && k);
```

Effects: If there is no key equivalent to x in the `flat_map`, inserts `value_type(move(x), T())` into the `flat_map` (the key is move-constructed)

Returns: Allocator reference to the `mapped_type` corresponding to x in *this.

Complexity: Logarithmic.

24.

```
T & at(const key_type & k);
```

Returns: Allocator reference to the element whose key is equivalent to x.

Throws: An exception object of type `out_of_range` if no such element is present.

Complexity: logarithmic.

25.

```
const T & at(const key_type & k) const;
```

Returns: Allocator reference to the element whose key is equivalent to x.

Throws: An exception object of type `out_of_range` if no such element is present.

Complexity: logarithmic.

26.

```
template<class... Args> std::pair< iterator, bool > emplace(Args &&... args);
```

Effects: Inserts an object x of type T constructed with `std::forward<Args>(args)...` if and only if there is no element in the container with key equivalent to the key of x.

Returns: The `bool` component of the returned pair is true if and only if the insertion takes place, and the `iterator` component of the pair points to the element with key equivalent to the key of x.

Complexity: Logarithmic search time plus linear insertion to the elements with bigger keys than x.

Note: If an element is inserted it might invalidate elements.

27.

```
template<class... Args>
iterator emplace_hint(const_iterator hint, Args &&... args);
```

Effects: Inserts an object of type T constructed with `std::forward<Args>(args)...` in the container if and only if there is no element in the container with key equivalent to the key of x. p is a hint pointing to where the insert should start to search.

Returns: An iterator pointing to the element with key equivalent to the key of x.

Complexity: Logarithmic search time (constant if x is inserted right before p) plus insertion linear to the elements with bigger keys than x.

Note: If an element is inserted it might invalidate elements.

28.

```
std::pair< iterator, bool > insert(const value_type & x);
```

Effects: Inserts x if and only if there is no element in the container with key equivalent to the key of x.

Returns: The bool component of the returned pair is true if and only if the insertion takes place, and the iterator component of the pair points to the element with key equivalent to the key of x.

Complexity: Logarithmic search time plus linear insertion to the elements with bigger keys than x.

Note: If an element is inserted it might invalidate elements.

29.

```
std::pair< iterator, bool > insert(value_type && x);
```

Effects: Inserts a new value_type move constructed from the pair if and only if there is no element in the container with key equivalent to the key of x.

Returns: The bool component of the returned pair is true if and only if the insertion takes place, and the iterator component of the pair points to the element with key equivalent to the key of x.

Complexity: Logarithmic search time plus linear insertion to the elements with bigger keys than x.

Note: If an element is inserted it might invalidate elements.

30.

```
std::pair< iterator, bool > insert(movable_value_type && x);
```

Effects: Inserts a new value_type move constructed from the pair if and only if there is no element in the container with key equivalent to the key of x.

Returns: The bool component of the returned pair is true if and only if the insertion takes place, and the iterator component of the pair points to the element with key equivalent to the key of x.

Complexity: Logarithmic search time plus linear insertion to the elements with bigger keys than x.

Note: If an element is inserted it might invalidate elements.

31.

```
iterator insert(const_iterator position, const value_type & x);
```

Effects: Inserts a copy of x in the container if and only if there is no element in the container with key equivalent to the key of x. p is a hint pointing to where the insert should start to search.

Returns: An iterator pointing to the element with key equivalent to the key of x.

Complexity: Logarithmic search time (constant if x is inserted right before p) plus insertion linear to the elements with bigger keys than x.

Note: If an element is inserted it might invalidate elements.

```
32 iterator insert(const_iterator position, value_type && x);
```

Effects: Inserts an element move constructed from *x* in the container. *p* is a hint pointing to where the insert should start to search.

Returns: An iterator pointing to the element with key equivalent to the key of *x*.

Complexity: Logarithmic search time (constant if *x* is inserted right before *p*) plus insertion linear to the elements with bigger keys than *x*.

Note: If an element is inserted it might invalidate elements.

```
33 iterator insert(const_iterator position, movable_value_type && x);
```

Effects: Inserts an element move constructed from *x* in the container. *p* is a hint pointing to where the insert should start to search.

Returns: An iterator pointing to the element with key equivalent to the key of *x*.

Complexity: Logarithmic search time (constant if *x* is inserted right before *p*) plus insertion linear to the elements with bigger keys than *x*.

Note: If an element is inserted it might invalidate elements.

```
34 template<typename InputIterator>
void insert(InputIterator first, InputIterator last);
```

Requires: *first*, *last* are not iterators into **this*.

Effects: inserts each element from the range [*first*,*last*) if and only if there is no element with key equivalent to the key of that element.

Complexity: At most $N \log(\text{size}()+N)$ (*N* is the distance from *first* to *last*) search time plus $N*\text{size}()$ insertion time.

Note: If an element is inserted it might invalidate elements.

```
35 template<typename InputIterator>
void insert(ordered_unique_range_t, InputIterator first, InputIterator last);
```

Requires: *first*, *last* are not iterators into **this*.

Requires: [*first*,*last*) must be ordered according to the predicate and must be unique values.

Effects: inserts each element from the range [*first*,*last*) if and only if there is no element with key equivalent to the key of that element. This function is more efficient than the normal range creation for ordered ranges.

Complexity: At most $N \log(\text{size}()+N)$ (*N* is the distance from *first* to *last*) search time plus $N*\text{size}()$ insertion time.

Note: If an element is inserted it might invalidate elements.

```
36 iterator erase(const_iterator position);
```

Effects: Erases the element pointed to by *position*.

Returns: Returns an iterator pointing to the element immediately following *q* prior to the element being erased. If no such element exists, returns *end()*.

Complexity: Linear to the elements with keys bigger than *position*

Note: Invalidates elements with keys not less than the erased element.

```
37. size_type erase(const key_type & x);
```

Effects: Erases all elements in the container with key equivalent to x.

Returns: Returns the number of erased elements.

Complexity: Logarithmic search time plus erasure time linear to the elements with bigger keys.

```
38. iterator erase(const_iterator first, const_iterator last);
```

Effects: Erases all the elements in the range [first, last).

Returns: Returns last.

Complexity: size()*N where N is the distance from first to last.

Complexity: Logarithmic search time plus erasure time linear to the elements with bigger keys.

```
39. void swap(flat_map & x);
```

Effects: Swaps the contents of *this and x.

Throws: Nothing.

Complexity: Constant.

```
40. void clear();
```

Effects: erase(a.begin(),a.end()).

Postcondition: size() == 0.

Complexity: linear in size().

```
41. key_compare key_comp() const;
```

Effects: Returns the comparison object out of which a was constructed.

Complexity: Constant.

```
42. value_compare value_comp() const;
```

Effects: Returns an object of value_compare constructed out of the comparison object.

Complexity: Constant.

```
43. iterator find(const key_type & x);
```

Returns: An iterator pointing to an element with the key equivalent to x, or end() if such an element is not found.

Complexity: Logarithmic.

```
44. const_iterator find(const key_type & x) const;
```

Returns: Allocator const_iterator pointing to an element with the key equivalent to x, or end() if such an element is not found.

Complexity: Logarithmic.s

```
45. size_type count(const key_type & x) const;
```

Returns: The number of elements with key equivalent to x.

Complexity: log(size()+count(k))

```
46. iterator lower_bound(const key_type & x);
```

Returns: An iterator pointing to the first element with key not less than k, or a.end() if such an element is not found.

Complexity: Logarithmic

```
47. const_iterator lower_bound(const key_type & x) const;
```

Returns: Allocator const iterator pointing to the first element with key not less than k, or a.end() if such an element is not found.

Complexity: Logarithmic

```
48. iterator upper_bound(const key_type & x);
```

Returns: An iterator pointing to the first element with key not less than x, or end() if such an element is not found.

Complexity: Logarithmic

```
49. const_iterator upper_bound(const key_type & x) const;
```

Returns: Allocator const iterator pointing to the first element with key not less than x, or end() if such an element is not found.

Complexity: Logarithmic

```
50. std::pair< iterator, iterator > equal_range(const key_type & x);
```

Effects: Equivalent to std::make_pair(this->lower_bound(k), this->upper_bound(k)).

Complexity: Logarithmic

```
51. std::pair< const_iterator, const_iterator >
    equal_range(const key_type & x) const;
```

Effects: Equivalent to std::make_pair(this->lower_bound(k), this->upper_bound(k)).

Complexity: Logarithmic

Class template flat_multimap

boost::container::flat_multimap

Synopsis

```
// In header: <boost/container/container_fwd.hpp>

template<typename Key, typename T, typename Compare = std::less<Key>,
        typename Allocator = std::allocator<std::pair<Key, T> > >
class flat_multimap {
public:
    // construct/copy/destroy
    flat_multimap();
    explicit flat_multimap(const Compare &,
                          const allocator_type & = allocator_type());
    template<typename InputIterator>
        flat_multimap(InputIterator, InputIterator, const Compare & = Compare(),
                      const allocator_type & = allocator_type());
    template<typename InputIterator>
        flat_multimap(ordered_range_t, InputIterator, InputIterator,
                      const Compare & = Compare(),
                      const allocator_type & = allocator_type());
    flat_multimap(const flat_multimap &);
    flat_multimap(flat_multimap &&);
    flat_multimap(const flat_multimap &, const allocator_type &);
    flat_multimap(flat_multimap &&, const allocator_type &);
    flat_multimap& operator=(const flat_multimap &);
    flat_multimap& operator=(flat_multimap &&);

    // public member functions
    allocator_type get_allocator() const;
    stored_allocator_type & get_stored_allocator();
    const stored_allocator_type & get_stored_allocator() const;
    iterator begin();
    const_iterator begin() const;
    iterator end();
    const_iterator end() const;
    reverse_iterator rbegin();
    const_reverse_iterator rbegin() const;
    reverse_iterator rend();
    const_reverse_iterator rend() const;
    const_iterator cbegin() const;
    const_iterator cend() const;
    const_reverse_iterator crbegin() const;
    const_reverse_iterator crend() const;
    bool empty() const;
    size_type size() const;
    size_type max_size() const;
    size_type capacity() const;
    void reserve(size_type);
    void shrink_to_fit();
    template<class... Args> iterator emplace(Args &&...);
    template<class... Args> iterator emplace_hint(const_iterator, Args &&...);
    iterator insert(const value_type &);
    iterator insert(value_type &&);
    iterator insert(impl_value_type &&);
    iterator insert(const_iterator, const value_type &);
    iterator insert(const_iterator, value_type &&);
    iterator insert(const_iterator, impl_value_type &&);
    template<typename InputIterator> void insert(InputIterator, InputIterator);
    template<typename InputIterator>
        void insert(ordered_range_t, InputIterator, InputIterator);
    iterator erase(const_iterator);
    size_type erase(const key_type &);
    iterator erase(const_iterator, const_iterator);
```

```

void swap(flat_multimap &);
void clear();
key_compare key_comp() const;
value_compare value_comp() const;
iterator find(const key_type &);
const_iterator find(const key_type &) const;
size_type count(const key_type &) const;
iterator lower_bound(const key_type &);
const_iterator lower_bound(const key_type &) const;
iterator upper_bound(const key_type &);
const_iterator upper_bound(const key_type &) const;
std::pair< iterator, iterator > equal_range(const key_type &);
std::pair< const_iterator, const_iterator >
equal_range(const key_type &) const;
};

```

Description

A `flat_multimap` is a kind of associative container that supports equivalent keys (possibly containing multiple copies of the same key value) and provides for fast retrieval of values of another type `T` based on the keys. The `flat_multimap` class supports random-access iterators.

A `flat_multimap` satisfies all of the requirements of a container and of a reversible container and of an associative container. For a `flat_multimap<Key,T>` the `key_type` is `Key` and the `value_type` is `std::pair<Key,T>` (unlike `std::multimap<Key, T>` which `value_type` is `std::pair<const Key, T>`).

Compare is the ordering function for Keys (e.g. `std::less<Key>`).

Allocator is the allocator to allocate the value_types (e.g. `allocator< std::pair<Key, T> >`).

`flat_multimap` public construct/copy/destroy

1.

```
flat_multimap();
```

Effects: Default constructs an empty `flat_map`.

Complexity: Constant.

2.

```
explicit flat_multimap(const Compare & comp,
                      const allocator_type & a = allocator_type());
```

Effects: Constructs an empty `flat_multimap` using the specified comparison object and allocator.

Complexity: Constant.

3.

```
template<typename InputIterator>
flat_multimap(InputIterator first, InputIterator last,
              const Compare & comp = Compare(),
              const allocator_type & a = allocator_type());
```

Effects: Constructs an empty `flat_multimap` using the specified comparison object and allocator, and inserts elements from the range `[first ,last)`.

Complexity: Linear in `N` if the range `[first ,last)` is already sorted using `comp` and otherwise `N logN`, where `N` is `last - first`.

```
4. template<typename InputIterator>
   flat_multimap(ordered_range_t, InputIterator first, InputIterator last,
                const Compare & comp = Compare(),
                const allocator_type & a = allocator_type());
```

Effects: Constructs an empty `flat_multimap` using the specified comparison object and allocator, and inserts elements from the ordered range [first ,last). This function is more efficient than the normal range creation for ordered ranges.

Requires: [first ,last) must be ordered according to the predicate.

Complexity: Linear in N.

Note: Non-standard extension.

```
5. flat_multimap(const flat_multimap & x);
```

Effects: Copy constructs a `flat_multimap`.

Complexity: Linear in x.size().

```
6. flat_multimap(flat_multimap && x);
```

Effects: Move constructs a `flat_multimap`. Constructs *this using x's resources.

Complexity: Constant.

Postcondition: x is emptied.

```
7. flat_multimap(const flat_multimap & x, const allocator_type & a);
```

Effects: Copy constructs a `flat_multimap` using the specified allocator.

Complexity: Linear in x.size().

```
8. flat_multimap(flat_multimap && x, const allocator_type & a);
```

Effects: Move constructs a `flat_multimap` using the specified allocator. Constructs *this using x's resources.

Complexity: Constant if a == x.get_allocator(), linear otherwise.

```
9. flat_multimap& operator=(const flat_multimap & x);
```

Effects: Makes *this a copy of x.

Complexity: Linear in x.size().

```
10. flat_multimap& operator=(flat_multimap && mx);
```

Effects: this->swap(x.get()).

Complexity: Constant.

`flat_multimap` public member functions

```
1. allocator_type get_allocator() const;
```

Effects: Returns a copy of the Allocator that was passed to the object's constructor.

Complexity: Constant.

2.

```
stored_allocator_type & get_stored_allocator();
```

Effects: Returns a reference to the internal allocator.

Throws: Nothing

Complexity: Constant.

Note: Non-standard extension.

3.

```
const stored_allocator_type & get_stored_allocator() const;
```

Effects: Returns a reference to the internal allocator.

Throws: Nothing

Complexity: Constant.

Note: Non-standard extension.

4.

```
iterator begin();
```

Effects: Returns an iterator to the first element contained in the container.

Throws: Nothing.

Complexity: Constant.

5.

```
const_iterator begin() const;
```

Effects: Returns a const_iterator to the first element contained in the container.

Throws: Nothing.

Complexity: Constant.

6.

```
iterator end();
```

Effects: Returns an iterator to the end of the container.

Throws: Nothing.

Complexity: Constant.

7.

```
const_iterator end() const;
```

Effects: Returns a const_iterator to the end of the container.

Throws: Nothing.

Complexity: Constant.

8.

```
reverse_iterator rbegin();
```

Effects: Returns a reverse_iterator pointing to the beginning of the reversed container.

Throws: Nothing.

Complexity: Constant.

9.

```
const_reverse_iterator rbegin() const;
```

Effects: Returns a const_reverse_iterator pointing to the beginning of the reversed container.

Throws: Nothing.

Complexity: Constant.

10.

```
reverse_iterator rend();
```

Effects: Returns a reverse_iterator pointing to the end of the reversed container.

Throws: Nothing.

Complexity: Constant.

11.

```
const_reverse_iterator rend() const;
```

Effects: Returns a const_reverse_iterator pointing to the end of the reversed container.

Throws: Nothing.

Complexity: Constant.

12.

```
const_iterator cbegin() const;
```

Effects: Returns a const_iterator to the first element contained in the container.

Throws: Nothing.

Complexity: Constant.

13.

```
const_iterator cend() const;
```

Effects: Returns a const_iterator to the end of the container.

Throws: Nothing.

Complexity: Constant.

14.

```
const_reverse_iterator crbegin() const;
```

Effects: Returns a const_reverse_iterator pointing to the beginning of the reversed container.

Throws: Nothing.

Complexity: Constant.

```
15. const_reverse_iterator crend() const;
```

Effects: Returns a `const_reverse_iterator` pointing to the end of the reversed container.

Throws: Nothing.

Complexity: Constant.

```
16. bool empty() const;
```

Effects: Returns true if the container contains no elements.

Throws: Nothing.

Complexity: Constant.

```
17. size_type size() const;
```

Effects: Returns the number of the elements contained in the container.

Throws: Nothing.

Complexity: Constant.

```
18. size_type max_size() const;
```

Effects: Returns the largest possible size of the container.

Throws: Nothing.

Complexity: Constant.

```
19. size_type capacity() const;
```

Effects: Number of elements for which memory has been allocated. `capacity()` is always greater than or equal to `size()`.

Throws: Nothing.

Complexity: Constant.

```
20. void reserve(size_type cnt);
```

Effects: If `n` is less than or equal to `capacity()`, this call has no effect. Otherwise, it is a request for allocation of additional memory. If the request is successful, then `capacity()` is greater than or equal to `n`; otherwise, `capacity()` is unchanged. In either case, `size()` is unchanged.

Throws: If memory allocation allocation throws or `T`'s copy constructor throws.

Note: If `capacity()` is less than "`cnt`", iterators and references to values might be invalidated.

```
21. void shrink_to_fit();
```

Effects: Tries to deallocate the excess of memory created

Throws: If memory allocation throws, or `T`'s copy constructor throws.

Complexity: Linear to size().

```
22. template<class... Args> iterator emplace(Args &&... args);
```

Effects: Inserts an object of type T constructed with `std::forward<Args>(args)...` and returns the iterator pointing to the newly inserted element.

Complexity: Logarithmic search time plus linear insertion to the elements with bigger keys than x.

Note: If an element is inserted it might invalidate elements.

```
23. template<class... Args>
    iterator emplace_hint(const_iterator hint, Args &&... args);
```

Effects: Inserts an object of type T constructed with `std::forward<Args>(args)...` in the container. p is a hint pointing to where the insert should start to search.

Returns: An iterator pointing to the element with key equivalent to the key of x.

Complexity: Logarithmic search time (constant time if the value is to be inserted before p) plus linear insertion to the elements with bigger keys than x.

Note: If an element is inserted it might invalidate elements.

```
24. iterator insert(const value_type & x);
```

Effects: Inserts x and returns the iterator pointing to the newly inserted element.

Complexity: Logarithmic search time plus linear insertion to the elements with bigger keys than x.

Note: If an element is inserted it might invalidate elements.

```
25. iterator insert(value_type && x);
```

Effects: Inserts a new value move-constructed from x and returns the iterator pointing to the newly inserted element.

Complexity: Logarithmic search time plus linear insertion to the elements with bigger keys than x.

Note: If an element is inserted it might invalidate elements.

```
26. iterator insert(impl_value_type && x);
```

Effects: Inserts a new value move-constructed from x and returns the iterator pointing to the newly inserted element.

Complexity: Logarithmic search time plus linear insertion to the elements with bigger keys than x.

Note: If an element is inserted it might invalidate elements.

```
27. iterator insert(const_iterator position, const value_type & x);
```

Effects: Inserts a copy of x in the container. p is a hint pointing to where the insert should start to search.

Returns: An iterator pointing to the element with key equivalent to the key of x.

Complexity: Logarithmic search time (constant time if the value is to be inserted before p) plus linear insertion to the elements with bigger keys than x.

Note: If an element is inserted it might invalidate elements.

```
28. iterator insert(const_iterator position, value_type && x);
```

Effects: Inserts a value move constructed from x in the container. p is a hint pointing to where the insert should start to search.

Returns: An iterator pointing to the element with key equivalent to the key of x.

Complexity: Logarithmic search time (constant time if the value is to be inserted before p) plus linear insertion to the elements with bigger keys than x.

Note: If an element is inserted it might invalidate elements.

```
29. iterator insert(const_iterator position, impl_value_type && x);
```

Effects: Inserts a value move constructed from x in the container. p is a hint pointing to where the insert should start to search.

Returns: An iterator pointing to the element with key equivalent to the key of x.

Complexity: Logarithmic search time (constant time if the value is to be inserted before p) plus linear insertion to the elements with bigger keys than x.

Note: If an element is inserted it might invalidate elements.

```
30. template<typename InputIterator>
    void insert(InputIterator first, InputIterator last);
```

Requires: first, last are not iterators into *this.

Effects: inserts each element from the range [first,last) .

Complexity: At most $N \log(\text{size}()+N)$ (N is the distance from first to last) search time plus $N*\text{size}()$ insertion time.

Note: If an element is inserted it might invalidate elements.

```
31. template<typename InputIterator>
    void insert(ordered_range_t, InputIterator first, InputIterator last);
```

Requires: first, last are not iterators into *this.

Requires: [first ,last) must be ordered according to the predicate.

Effects: inserts each element from the range [first,last) if and only if there is no element with key equivalent to the key of that element. This function is more efficient than the normal range creation for ordered ranges.

Complexity: At most $N \log(\text{size}()+N)$ (N is the distance from first to last) search time plus $N*\text{size}()$ insertion time.

Note: If an element is inserted it might invalidate elements.

```
32. iterator erase(const_iterator position);
```

Effects: Erases the element pointed to by position.

Returns: Returns an iterator pointing to the element immediately following q prior to the element being erased. If no such element exists, returns end().

Complexity: Linear to the elements with keys bigger than position

Note: Invalidates elements with keys not less than the erased element.

```
33. size_type erase(const key_type & x);
```

Effects: Erases all elements in the container with key equivalent to x.

Returns: Returns the number of erased elements.

Complexity: Logarithmic search time plus erasure time linear to the elements with bigger keys.

```
34. iterator erase(const_iterator first, const_iterator last);
```

Effects: Erases all the elements in the range [first, last).

Returns: Returns last.

Complexity: size()*N where N is the distance from first to last.

Complexity: Logarithmic search time plus erasure time linear to the elements with bigger keys.

```
35. void swap(flat_multimap & x);
```

Effects: Swaps the contents of *this and x.

Throws: Nothing.

Complexity: Constant.

```
36. void clear();
```

Effects: erase(a.begin(),a.end()).

Postcondition: size() == 0.

Complexity: linear in size().

```
37. key_compare key_comp() const;
```

Effects: Returns the comparison object out of which a was constructed.

Complexity: Constant.

```
38. value_compare value_comp() const;
```

Effects: Returns an object of value_compare constructed out of the comparison object.

Complexity: Constant.

```
39. iterator find(const key_type & x);
```

Returns: An iterator pointing to an element with the key equivalent to x, or end() if such an element is not found.

Complexity: Logarithmic.

```
40. const_iterator find(const key_type & x) const;
```

Returns: An `const_iterator` pointing to an element with the key equivalent to `x`, or `end()` if such an element is not found.

Complexity: Logarithmic.

```
41. size_type count(const key_type & x) const;
```

Returns: The number of elements with key equivalent to `x`.

Complexity: $\log(\text{size}()) + \text{count}(k)$

```
42. iterator lower_bound(const key_type & x);
```

Returns: An iterator pointing to the first element with key not less than `k`, or `a.end()` if such an element is not found.

Complexity: Logarithmic

```
43. const_iterator lower_bound(const key_type & x) const;
```

Returns: Allocator `const_iterator` pointing to the first element with key not less than `k`, or `a.end()` if such an element is not found.

Complexity: Logarithmic

```
44. iterator upper_bound(const key_type & x);
```

Returns: An iterator pointing to the first element with key not less than `x`, or `end()` if such an element is not found.

Complexity: Logarithmic

```
45. const_iterator upper_bound(const key_type & x) const;
```

Returns: Allocator `const_iterator` pointing to the first element with key not less than `x`, or `end()` if such an element is not found.

Complexity: Logarithmic

```
46. std::pair< iterator, iterator > equal_range(const key_type & x);
```

Effects: Equivalent to `std::make_pair(this->lower_bound(k), this->upper_bound(k))`.

Complexity: Logarithmic

```
47. std::pair< const_iterator, const_iterator >
   equal_range(const key_type & x) const;
```

Effects: Equivalent to `std::make_pair(this->lower_bound(k), this->upper_bound(k))`.

Complexity: Logarithmic

Class template `basic_string`

`boost::container::basic_string`

Synopsis

```
// In header: <boost/container/container_fwd.hpp>

template<typename CharT, typename Traits = std::char_traits<CharT>,
        typename Allocator = std::allocator<CharT> >
class basic_string {
public:
    // construct/copy/destroy
    basic_string();
    explicit basic_string(const allocator_type &);
    basic_string(const basic_string &);
    basic_string(basic_string &&);
    basic_string(const basic_string &, const allocator_type &);
    basic_string(basic_string &&, const allocator_type &);
    basic_string(const basic_string &, size_type, size_type = npos,
                const allocator_type & = allocator_type());
    basic_string(const CharT *, size_type,
                const allocator_type & = allocator_type());
    basic_string(const CharT *, const allocator_type & = allocator_type());
    basic_string(size_type, CharT, const allocator_type & = allocator_type());
    template<typename InputIterator>
        basic_string(InputIterator, InputIterator,
                    const allocator_type & = allocator_type());
    basic_string& operator=(const basic_string &);
    basic_string& operator=(basic_string &&);
    basic_string& operator=(const CharT *);
    basic_string& operator=(CharT);
    ~basic_string();

    // public member functions
    allocator_type get_allocator() const;
    stored_allocator_type & get_stored_allocator();
    const stored_allocator_type & get_stored_allocator() const;
    iterator begin();
    const_iterator begin() const;
    iterator end();
    const_iterator end() const;
    reverse_iterator rbegin();
    const_reverse_iterator rbegin() const;
    reverse_iterator rend();
    const_reverse_iterator rend() const;
    const_iterator cbegin() const;
    const_iterator cend() const;
    const_reverse_iterator crbegin() const;
    const_reverse_iterator crend() const;
    bool empty() const;
    size_type size() const;
    size_type length() const;
    size_type max_size() const;
    void resize(size_type, CharT);
    void resize(size_type);
    size_type capacity() const;
    void reserve(size_type);
    void shrink_to_fit();
    reference operator[](size_type);
    const_reference operator[](size_type) const;
    reference at(size_type);
    const_reference at(size_type) const;
    basic_string & operator+=(const basic_string &);
    basic_string & operator+=(const CharT *);
    basic_string & operator+=(CharT);
```

```

basic_string & append(const basic_string &);
basic_string & append(const basic_string &, size_type, size_type);
basic_string & append(const CharT *, size_type);
basic_string & append(const CharT *);
basic_string & append(size_type, CharT);
template<typename InputIter> basic_string & append(InputIter, InputIter);
void push_back(CharT);
basic_string & assign(const basic_string &);
basic_string & assign(basic_string &&);
basic_string & assign(const basic_string &, size_type, size_type);
basic_string & assign(const CharT *, size_type);
basic_string & assign(const CharT *);
basic_string & assign(size_type, CharT);
template<typename InputIter> basic_string & assign(InputIter, InputIter);
basic_string & insert(size_type, const basic_string &);
basic_string & insert(size_type, const basic_string &, size_type, size_type);
basic_string & insert(size_type, const CharT *, size_type);
basic_string & insert(size_type, const CharT *);
basic_string & insert(size_type, size_type, CharT);
iterator insert(const_iterator, CharT);
iterator insert(const_iterator, size_type, CharT);
template<typename InputIter>
    iterator insert(const_iterator, InputIter, InputIter);
basic_string & erase(size_type = 0, size_type = npos);
iterator erase(const_iterator);
iterator erase(const_iterator, const_iterator);
void pop_back();
void clear();
basic_string & replace(size_type, size_type, const basic_string &);
basic_string &
replace(size_type, size_type, const basic_string &, size_type, size_type);
basic_string & replace(size_type, size_type, const CharT *, size_type);
basic_string & replace(size_type, size_type, const CharT *);
basic_string & replace(size_type, size_type, size_type, CharT);
basic_string & replace(const_iterator, const_iterator, const basic_string &);
basic_string &
replace(const_iterator, const_iterator, const CharT *, size_type);
basic_string & replace(const_iterator, const_iterator, const CharT *);
basic_string & replace(const_iterator, const_iterator, size_type, CharT);
template<typename InputIter>
    basic_string &
    replace(const_iterator, const_iterator, InputIter, InputIter);
size_type copy(CharT *, size_type, size_type = 0) const;
void swap(basic_string &);
const CharT * c_str() const;
const CharT * data() const;
size_type find(const basic_string &, size_type = 0) const;
size_type find(const CharT *, size_type, size_type) const;
size_type find(const CharT *, size_type = 0) const;
size_type find(CharT, size_type = 0) const;
size_type rfind(const basic_string &, size_type = npos) const;
size_type rfind(const CharT *, size_type, size_type) const;
size_type rfind(const CharT *, size_type = npos) const;
size_type rfind(CharT, size_type = npos) const;
size_type find_first_of(const basic_string &, size_type = 0) const;
size_type find_first_of(const CharT *, size_type, size_type) const;
size_type find_first_of(const CharT *, size_type = 0) const;
size_type find_first_of(CharT, size_type = 0) const;
size_type find_last_of(const basic_string &, size_type = npos) const;
size_type find_last_of(const CharT *, size_type, size_type) const;
size_type find_last_of(const CharT *, size_type = npos) const;
size_type find_last_of(CharT, size_type = npos) const;
size_type find_first_not_of(const basic_string &, size_type = 0) const;

```

```

size_type find_first_not_of(const CharT *, size_type, size_type) const;
size_type find_first_not_of(const CharT *, size_type = 0) const;
size_type find_first_not_of(CharT, size_type = 0) const;
size_type find_last_not_of(const basic_string &, size_type = npos) const;
size_type find_last_not_of(const CharT *, size_type, size_type) const;
size_type find_last_not_of(const CharT *, size_type = npos) const;
size_type find_last_not_of(CharT, size_type = npos) const;
basic_string substr(size_type = 0, size_type = npos) const;
int compare(const basic_string &) const;
int compare(size_type, size_type, const basic_string &) const;
int compare(size_type, size_type, const basic_string &, size_type,
            size_type) const;
int compare(const CharT *) const;
int compare(size_type, size_type, const CharT *, size_type) const;
int compare(size_type, size_type, const CharT *) const;
};

```

Description

The `basic_string` class represents a Sequence of characters. It contains all the usual operations of a Sequence, and, additionally, it contains standard string operations such as search and concatenation.

The `basic_string` class is parameterized by character type, and by that type's Character Traits.

This class has performance characteristics very much like `vector<>`, meaning, for example, that it does not perform reference-count or copy-on-write, and that concatenation of two strings is an $O(N)$ operation.

Some of `basic_string`'s member functions use an unusual method of specifying positions and ranges. In addition to the conventional method using iterators, many of `basic_string`'s member functions use a single value `pos` of type `size_type` to represent a position (in which case the position is `begin() + pos`), and many of `basic_string`'s member functions use two values, `pos` and `n`, to represent a range. In that case `pos` is the beginning of the range and `n` is its size. That is, the range is `[begin() + pos, begin() + pos + n)`.

Note that the C++ standard does not specify the complexity of `basic_string` operations. In this implementation, `basic_string` has performance characteristics very similar to those of `vector`: access to a single character is $O(1)$, while copy and concatenation are $O(N)$.

In this implementation, `begin()`, `end()`, `rbegin()`, `rend()`, `operator[]`, `c_str()`, and `data()` do not invalidate iterators. In this implementation, iterators are only invalidated by member functions that explicitly change the string's contents.

`basic_string` public construct/copy/destroy

1. `basic_string();`

Effects: Default constructs a `basic_string`.

Throws: If `allocator_type`'s default constructor throws.

2. `explicit basic_string(const allocator_type & a);`

Effects: Constructs a `basic_string` taking the allocator as parameter.

Throws: Nothing

3. `basic_string(const basic_string & s);`

Effects: Copy constructs a `basic_string`.

Postcondition: `x == *this`.

Throws: If allocator_type's default constructor throws.

4.

```
basic_string(basic_string && s);
```

Effects: Move constructor. Moves s's resources to *this.

Throws: Nothing.

Complexity: Constant.

5.

```
basic_string(const basic_string & s, const allocator_type & a);
```

Effects: Copy constructs a basic_string using the specified allocator.

Postcondition: x == *this.

Throws: If allocation throws.

6.

```
basic_string(basic_string && s, const allocator_type & a);
```

Effects: Move constructor using the specified allocator. Moves s's resources to *this.

Throws: If allocation throws.

Complexity: Constant if a == s.get_allocator(), linear otherwise.

7.

```
basic_string(const basic_string & s, size_type pos, size_type n = npos,
             const allocator_type & a = allocator_type());
```

Effects: Constructs a basic_string taking the allocator as parameter, and is initialized by a specific number of characters of the s string.

8.

```
basic_string(const CharT * s, size_type n,
             const allocator_type & a = allocator_type());
```

Effects: Constructs a basic_string taking the allocator as parameter, and is initialized by a specific number of characters of the s c-string.

9.

```
basic_string(const CharT * s, const allocator_type & a = allocator_type());
```

Effects: Constructs a basic_string taking the allocator as parameter, and is initialized by the null-terminated s c-string.

10.

```
basic_string(size_type n, CharT c,
             const allocator_type & a = allocator_type());
```

Effects: Constructs a basic_string taking the allocator as parameter, and is initialized by n copies of c.

11.

```
template<typename InputIterator>
basic_string(InputIterator f, InputIterator l,
             const allocator_type & a = allocator_type());
```

Effects: Constructs a basic_string taking the allocator as parameter, and a range of iterators.

```
12 basic_string& operator=(const basic_string & x);
```

Effects: Copy constructs a string.

Postcondition: `x == *this`.

Complexity: Linear to the elements `x` contains.

```
13 basic_string& operator=(basic_string && x);
```

Effects: Move constructor. Moves `mx`'s resources to `*this`.

Throws: If `allocator_type`'s copy constructor throws.

Complexity: Constant.

```
14 basic_string& operator=(const CharT * s);
```

Effects: Assignment from a null-terminated c-string.

```
15 basic_string& operator=(CharT c);
```

Effects: Assignment from character.

```
16 ~basic_string();
```

Effects: Destroys the `basic_string`. All used memory is deallocated.

Throws: Nothing.

Complexity: Constant.

`basic_string` public member functions

```
1. allocator_type get_allocator() const;
```

Effects: Returns a copy of the internal allocator.

Throws: If allocator's copy constructor throws.

Complexity: Constant.

```
2. stored_allocator_type & get_stored_allocator();
```

Effects: Returns a reference to the internal allocator.

Throws: Nothing

Complexity: Constant.

Note: Non-standard extension.

```
3. const stored_allocator_type & get_stored_allocator() const;
```

Effects: Returns a reference to the internal allocator.

Throws: Nothing

Complexity: Constant.

Note: Non-standard extension.

4.

```
iterator begin();
```

Effects: Returns an iterator to the first element contained in the vector.

Throws: Nothing.

Complexity: Constant.

5.

```
const_iterator begin() const;
```

Effects: Returns a const_iterator to the first element contained in the vector.

Throws: Nothing.

Complexity: Constant.

6.

```
iterator end();
```

Effects: Returns an iterator to the end of the vector.

Throws: Nothing.

Complexity: Constant.

7.

```
const_iterator end() const;
```

Effects: Returns a const_iterator to the end of the vector.

Throws: Nothing.

Complexity: Constant.

8.

```
reverse_iterator rbegin();
```

Effects: Returns a reverse_iterator pointing to the beginning of the reversed vector.

Throws: Nothing.

Complexity: Constant.

9.

```
const_reverse_iterator rbegin() const;
```

Effects: Returns a const_reverse_iterator pointing to the beginning of the reversed vector.

Throws: Nothing.

Complexity: Constant.

10.

```
reverse_iterator rend();
```

Effects: Returns a `reverse_iterator` pointing to the end of the reversed vector.

Throws: Nothing.

Complexity: Constant.

11.

```
const_reverse_iterator rend() const;
```

Effects: Returns a `const_reverse_iterator` pointing to the end of the reversed vector.

Throws: Nothing.

Complexity: Constant.

12.

```
const_iterator cbegin() const;
```

Effects: Returns a `const_iterator` to the first element contained in the vector.

Throws: Nothing.

Complexity: Constant.

13.

```
const_iterator cend() const;
```

Effects: Returns a `const_iterator` to the end of the vector.

Throws: Nothing.

Complexity: Constant.

14.

```
const_reverse_iterator crbegin() const;
```

Effects: Returns a `const_reverse_iterator` pointing to the beginning of the reversed vector.

Throws: Nothing.

Complexity: Constant.

15.

```
const_reverse_iterator crend() const;
```

Effects: Returns a `const_reverse_iterator` pointing to the end of the reversed vector.

Throws: Nothing.

Complexity: Constant.

16.

```
bool empty() const;
```

Effects: Returns true if the vector contains no elements.

Throws: Nothing.

Complexity: Constant.

17.

```
size_type size() const;
```

Effects: Returns the number of the elements contained in the vector.

Throws: Nothing.

Complexity: Constant.

```
18. size_type length() const;
```

Effects: Returns the number of the elements contained in the vector.

Throws: Nothing.

Complexity: Constant.

```
19. size_type max_size() const;
```

Effects: Returns the largest possible size of the vector.

Throws: Nothing.

Complexity: Constant.

```
20. void resize(size_type n, CharT c);
```

Effects: Inserts or erases elements at the end such that the size becomes n. New elements are copy constructed from x.

Throws: If memory allocation throws

Complexity: Linear to the difference between size() and new_size.

```
21. void resize(size_type n);
```

Effects: Inserts or erases elements at the end such that the size becomes n. New elements are default constructed.

Throws: If memory allocation throws

Complexity: Linear to the difference between size() and new_size.

```
22. size_type capacity() const;
```

Effects: Number of elements for which memory has been allocated. capacity() is always greater than or equal to size().

Throws: Nothing.

Complexity: Constant.

```
23. void reserve(size_type res_arg);
```

Effects: If n is less than or equal to capacity(), this call has no effect. Otherwise, it is a request for allocation of additional memory. If the request is successful, then capacity() is greater than or equal to n; otherwise, capacity() is unchanged. In either case, size() is unchanged.

Throws: If memory allocation allocation throws

```
24. void shrink_to_fit();
```

Effects: Tries to deallocate the excess of memory created with previous allocations. The size of the string is unchanged

Throws: Nothing

Complexity: Linear to size().

25. `reference operator[](size_type n);`

Requires: size() > n.

Effects: Returns a reference to the nth element from the beginning of the container.

Throws: Nothing.

Complexity: Constant.

26. `const_reference operator[](size_type n) const;`

Requires: size() > n.

Effects: Returns a const reference to the nth element from the beginning of the container.

Throws: Nothing.

Complexity: Constant.

27. `reference at(size_type n);`

Requires: size() > n.

Effects: Returns a reference to the nth element from the beginning of the container.

Throws: std::range_error if n >= size()

Complexity: Constant.

28. `const_reference at(size_type n) const;`

Requires: size() > n.

Effects: Returns a const reference to the nth element from the beginning of the container.

Throws: std::range_error if n >= size()

Complexity: Constant.

29. `basic_string & operator+=(const basic_string & s);`

Effects: Calls append(str.data, str.size()).

Returns: *this

30. `basic_string & operator+=(const CharT * s);`

Effects: Calls append(s).

Returns: *this

```
31. basic_string & operator+=(CharT c);
```

Effects: Calls `append(1, c)`.

Returns: `*this`

```
32. basic_string & append(const basic_string & s);
```

Effects: Calls `append(str.data(), str.size())`.

Returns: `*this`

```
33. basic_string & append(const basic_string & s, size_type pos, size_type n);
```

Requires: `pos <= str.size()`

Effects: Determines the effective length `rlen` of the string to append as the smaller of `n` and `str.size() - pos` and calls `append(str.data() + pos, rlen)`.

Throws: If memory allocation throws and `out_of_range` if `pos > str.size()`

Returns: `*this`

```
34. basic_string & append(const CharT * s, size_type n);
```

Requires: `s` points to an array of at least `n` elements of `CharT`.

Effects: The function replaces the string controlled by `*this` with a string of length `size() + n` whose first `size()` elements are a copy of the original string controlled by `*this` and whose remaining elements are a copy of the initial `n` elements of `s`.

Throws: If memory allocation throws `length_error` if `size() + n > max_size()`.

Returns: `*this`

```
35. basic_string & append(const CharT * s);
```

Requires: `s` points to an array of at least `traits::length(s) + 1` elements of `CharT`.

Effects: Calls `append(s, traits::length(s))`.

Returns: `*this`

```
36. basic_string & append(size_type n, CharT c);
```

Effects: Equivalent to `append(basic_string(n, c))`.

Returns: `*this`

```
37. template<typename InputIter>  
basic_string & append(InputIter first, InputIter last);
```

Requires: `[first,last)` is a valid range.

Effects: Equivalent to `append(basic_string(first, last))`.

Returns: *this

```
38. void push_back(CharT c);
```

Effects: Equivalent to `append(static_cast<size_type>(1), c)`.

```
39. basic_string & assign(const basic_string & s);
```

Effects: Equivalent to `assign(str, 0, npos)`.

Returns: *this

```
40. basic_string & assign(basic_string && ms);
```

Effects: The function replaces the string controlled by *this with a string of length `str.size()` whose elements are a copy of the string controlled by `str`. Leaves `str` in a valid but unspecified state.

Throws: Nothing

Returns: *this

```
41. basic_string & assign(const basic_string & s, size_type pos, size_type n);
```

Requires: `pos <= str.size()`

Effects: Determines the effective length `rlen` of the string to assign as the smaller of `n` and `str.size() - pos` and calls `assign(str.data() + pos, rlen)`.

Throws: If memory allocation throws or `out_of_range` if `pos > str.size()`.

Returns: *this

```
42. basic_string & assign(const CharT * s, size_type n);
```

Requires: `s` points to an array of at least `n` elements of `CharT`.

Effects: Replaces the string controlled by *this with a string of length `n` whose elements are a copy of those pointed to by `s`.

Throws: If memory allocation throws or `length_error` if `n > max_size()`.

Returns: *this

```
43. basic_string & assign(const CharT * s);
```

Requires: `s` points to an array of at least `traits::length(s) + 1` elements of `CharT`.

Effects: Calls `assign(s, traits::length(s))`.

Returns: *this

```
44. basic_string & assign(size_type n, CharT c);
```

Effects: Equivalent to `assign(basic_string(n, c))`.

Returns: *this

```
45. template<typename InputIter>
    basic_string & assign(InputIter first, InputIter last);
```

Effects: Equivalent to `assign(basic_string(first, last))`.

Returns: `*this`

```
46. basic_string & insert(size_type pos, const basic_string & s);
```

Requires: `pos <= size()`.

Effects: Calls `insert(pos, str.data(), str.size())`.

Throws: If memory allocation throws or `out_of_range` if `pos > size()`.

Returns: `*this`

```
47. basic_string &
    insert(size_type pos1, const basic_string & s, size_type pos2, size_type n);
```

Requires: `pos1 <= size()` and `pos2 <= str.size()`

Effects: Determines the effective length `rlen` of the string to insert as the smaller of `n` and `str.size() - pos2` and calls `insert(pos1, str.data() + pos2, rlen)`.

Throws: If memory allocation throws or `out_of_range` if `pos1 > size()` or `pos2 > str.size()`.

Returns: `*this`

```
48. basic_string & insert(size_type pos, const CharT * s, size_type n);
```

Requires: `s` points to an array of at least `n` elements of `CharT` and `pos <= size()`.

Effects: Replaces the string controlled by `*this` with a string of length `size() + n` whose first `pos` elements are a copy of the initial elements of the original string controlled by `*this` and whose next `n` elements are a copy of the elements in `s` and whose remaining elements are a copy of the remaining elements of the original string controlled by `*this`.

Throws: If memory allocation throws, `out_of_range` if `pos > size()` or `length_error` if `size() + n > max_size()`.

Returns: `*this`

```
49. basic_string & insert(size_type pos, const CharT * s);
```

Requires: `pos <= size()` and `s` points to an array of at least `traits::length(s) + 1` elements of `CharT`

Effects: Calls `insert(pos, s, traits::length(s))`.

Throws: If memory allocation throws, `out_of_range` if `pos > size()` `length_error` if `size() > max_size() - Traits::length(s)`

Returns: `*this`

```
50. basic_string & insert(size_type pos, size_type n, CharT c);
```

Effects: Equivalent to `insert(pos, basic_string(n, c))`.

Throws: If memory allocation throws, `out_of_range` if `pos > size()` `length_error` if `size() > max_size() - n`

Returns: *this

```
51. iterator insert(const_iterator p, CharT c);
```

Requires: p is a valid iterator on *this.

Effects: inserts a copy of c before the character referred to by p.

Returns: An iterator which refers to the copy of the inserted character.

```
52. iterator insert(const_iterator p, size_type n, CharT c);
```

Requires: p is a valid iterator on *this.

Effects: Inserts n copies of c before the character referred to by p.

Returns: an iterator to the first inserted element or p if n is 0.

```
53. template<typename InputIter>
    iterator insert(const_iterator p, InputIter first, InputIter last);
```

Requires: p is a valid iterator on *this. [first,last) is a valid range.

Effects: Equivalent to insert(p - begin(), basic_string(first, last)).

Returns: an iterator to the first inserted element or p if first == last.

```
54. basic_string & erase(size_type pos = 0, size_type n = npos);
```

Requires: pos <= size()

Effects: Determines the effective length xlen of the string to be removed as the smaller of n and size() - pos. The function then replaces the string controlled by *this with a string of length size() - xlen whose first pos elements are a copy of the initial elements of the original string controlled by *this, and whose remaining elements are a copy of the elements of the original string controlled by *this beginning at position pos + xlen.

Throws: out_of_range if pos > size().

Returns: *this

```
55. iterator erase(const_iterator p);
```

Effects: Removes the character referred to by p.

Throws: Nothing

Returns: An iterator which points to the element immediately following p prior to the element being erased. If no such element exists, end() is returned.

```
56. iterator erase(const_iterator first, const_iterator last);
```

Requires: first and last are valid iterators on *this, defining a range [first,last).

Effects: Removes the characters in the range [first,last).

Throws: Nothing

Returns: An iterator which points to the element pointed to by last prior to the other elements being erased. If no such element exists, end() is returned.

57.

```
void pop_back();
```

Requires: !empty()

Throws: Nothing

Effects: Equivalent to erase(size() - 1, 1).

58.

```
void clear();
```

Effects: Erases all the elements of the vector.

Throws: Nothing.

Complexity: Linear to the number of elements in the vector.

59.

```
basic_string & replace(size_type pos1, size_type n1, const basic_string & str);
```

Requires: pos1 <= size().

Effects: Calls replace(pos1, n1, str.data(), str.size()).

Throws: if memory allocation throws or out_of_range if pos1 > size().

Returns: *this

60.

```
basic_string &
replace(size_type pos1, size_type n1, const basic_string & str,
        size_type pos2, size_type n2);
```

Requires: pos1 <= size() and pos2 <= str.size().

Effects: Determines the effective length rlen of the string to be inserted as the smaller of n2 and str.size() - pos2 and calls replace(pos1, n1, str.data() + pos2, rlen).

Throws: if memory allocation throws, out_of_range if pos1 > size() or pos2 > str.size().

Returns: *this

61.

```
basic_string &
replace(size_type pos1, size_type n1, const CharT * s, size_type n2);
```

Requires: pos1 <= size() and s points to an array of at least n2 elements of CharT.

Effects: Determines the effective length xlen of the string to be removed as the smaller of n1 and size() - pos1. If size() - xlen >= max_size() - n2 throws length_error. Otherwise, the function replaces the string controlled by *this with a string of length size() - xlen + n2 whose first pos1 elements are a copy of the initial elements of the original string controlled by *this, whose next n2 elements are a copy of the initial n2 elements of s, and whose remaining elements are a copy of the elements of the original string controlled by *this beginning at position pos + xlen.

Throws: if memory allocation throws, out_of_range if pos1 > size() or length_error if the length of the resulting string would exceed max_size()

Returns: *this

```
62. basic_string & replace(size_type pos, size_type n1, const CharT * s);
```

Requires: $pos1 \leq size()$ and s points to an array of at least $n2$ elements of $CharT$.

Effects: Determines the effective length $xlen$ of the string to be removed as the smaller of $n1$ and $size() - pos1$. If $size() - xlen \geq max_size() - n2$ throws `length_error`. Otherwise, the function replaces the string controlled by `*this` with a string of length $size() - xlen + n2$ whose first $pos1$ elements are a copy of the initial elements of the original string controlled by `*this`, whose next $n2$ elements are a copy of the initial $n2$ elements of s , and whose remaining elements are a copy of the elements of the original string controlled by `*this` beginning at position $pos + xlen$.

Throws: if memory allocation throws, `out_of_range` if $pos1 > size()$ or `length_error` if the length of the resulting string would exceed `max_size()`

Returns: `*this`

```
63. basic_string & replace(size_type pos1, size_type n1, size_type n2, CharT c);
```

Requires: $pos1 \leq size()$.

Effects: Equivalent to `replace(pos1, n1, basic_string(n2, c))`.

Throws: if memory allocation throws, `out_of_range` if $pos1 > size()$ or `length_error` if the length of the resulting string would exceed `max_size()`

Returns: `*this`

```
64. basic_string &
replace(const_iterator i1, const_iterator i2, const basic_string & str);
```

Requires: $[begin(), i1)$ and $[i1, i2)$ are valid ranges.

Effects: Calls `replace(i1 - begin(), i2 - i1, str)`.

Throws: if memory allocation throws

Returns: `*this`

```
65. basic_string &
replace(const_iterator i1, const_iterator i2, const CharT * s, size_type n);
```

Requires: $[begin(), i1)$ and $[i1, i2)$ are valid ranges and s points to an array of at least n elements

Effects: Calls `replace(i1 - begin(), i2 - i1, s, n)`.

Throws: if memory allocation throws

Returns: `*this`

```
66. basic_string & replace(const_iterator i1, const_iterator i2, const CharT * s);
```

Requires: $[begin(), i1)$ and $[i1, i2)$ are valid ranges and s points to an array of at least `traits::length(s) + 1` elements of $CharT$.

Effects: Calls `replace(i1 - begin(), i2 - i1, s, traits::length(s))`.

Throws: if memory allocation throws

Returns: `*this`

```
67. basic_string &
    replace(const_iterator i1, const_iterator i2, size_type n, CharT c);
```

Requires: [begin(),i1) and [i1,i2) are valid ranges.

Effects: Calls `replace(i1 - begin(), i2 - i1, basic_string(n, c))`.

Throws: if memory allocation throws

Returns: *this

```
68. template<typename InputIter>
    basic_string &
    replace(const_iterator i1, const_iterator i2, InputIter j1, InputIter j2);
```

Requires: [begin(),i1), [i1,i2) and [j1,j2) are valid ranges.

Effects: Calls `replace(i1 - begin(), i2 - i1, basic_string(j1, j2))`.

Throws: if memory allocation throws

Returns: *this

```
69. size_type copy(CharT * s, size_type n, size_type pos = 0) const;
```

Requires: `pos <= size()`

Effects: Determines the effective length `rlen` of the string to copy as the smaller of `n` and `size() - pos`. `s` shall designate an array of at least `rlen` elements. The function then replaces the string designated by `s` with a string of length `rlen` whose elements are a copy of the string controlled by *this beginning at position `pos`. The function does not append a null object to the string designated by `s`.

Throws: if memory allocation throws, `out_of_range` if `pos > size()`.

Returns: `rlen`

```
70. void swap(basic_string & x);
```

Effects: *this contains the same sequence of characters that was in `s`, `s` contains the same sequence of characters that was in *this.

Throws: Nothing

```
71. const CharT * c_str() const;
```

Requires: The program shall not alter any of the values stored in the character array.

Returns: Allocator pointer `p` such that `p + i == &operator[](i)` for each `i` in `[0,size())`.

Complexity: constant time.

```
72. const CharT * data() const;
```

Requires: The program shall not alter any of the values stored in the character array.

Returns: Allocator pointer `p` such that `p + i == &operator[](i)` for each `i` in `[0,size())`.

Complexity: constant time.

```
73. size_type find(const basic_string & s, size_type pos = 0) const;
```

Effects: Determines the lowest position `xpos`, if possible, such that both of the following conditions obtain: 1) `pos <= xpos` and `xpos + str.size() <= size()`; 2) `traits::eq(at(xpos+I), str.at(I))` for all elements `I` of the string controlled by `str`.

Throws: Nothing

Returns: `xpos` if the function can determine such a value for `xpos`. Otherwise, returns `npos`.

```
74. size_type find(const CharT * s, size_type pos, size_type n) const;
```

Requires: `s` points to an array of at least `n` elements of `CharT`.

Throws: Nothing

Returns: `find(basic_string<CharT,traits,Allocator>(s,n),pos)`.

```
75. size_type find(const CharT * s, size_type pos = 0) const;
```

Requires: `s` points to an array of at least `traits::length(s) + 1` elements of `CharT`.

Throws: Nothing

Returns: `find(basic_string(s), pos)`.

```
76. size_type find(CharT c, size_type pos = 0) const;
```

Throws: Nothing

Returns: `find(basic_string<CharT,traits,Allocator>(1,c), pos)`.

```
77. size_type rfind(const basic_string & str, size_type pos = npos) const;
```

Effects: Determines the highest position `xpos`, if possible, such that both of the following conditions obtain: a) `xpos <= pos` and `xpos + str.size() <= size()`; b) `traits::eq(at(xpos+I), str.at(I))` for all elements `I` of the string controlled by `str`.

Throws: Nothing

Returns: `xpos` if the function can determine such a value for `xpos`. Otherwise, returns `npos`.

```
78. size_type rfind(const CharT * s, size_type pos, size_type n) const;
```

Requires: `s` points to an array of at least `n` elements of `CharT`.

Throws: Nothing

Returns: `rfind(basic_string(s, n), pos)`.

```
79. size_type rfind(const CharT * s, size_type pos = npos) const;
```

Requires: `pos <= size()` and `s` points to an array of at least `traits::length(s) + 1` elements of `CharT`.

Throws: Nothing

Returns: `rfind(basic_string(s), pos)`.

```
80. size_type rfind(CharT c, size_type pos = npos) const;
```

Throws: Nothing

Returns: `rfind(basic_string<CharT,traits,Allocator>(1,c),pos)`.

```
81. size_type find_first_of(const basic_string & s, size_type pos = 0) const;
```

Effects: Determines the lowest position `xpos`, if possible, such that both of the following conditions obtain: a) `pos <= xpos` and `xpos < size()`; b) `traits::eq(at(xpos), str.at(I))` for some element `I` of the string controlled by `str`.

Throws: Nothing

Returns: `xpos` if the function can determine such a value for `xpos`. Otherwise, returns `npos`.

```
82. size_type find_first_of(const CharT * s, size_type pos, size_type n) const;
```

Requires: `s` points to an array of at least `n` elements of `CharT`.

Throws: Nothing

Returns: `find_first_of(basic_string(s, n), pos)`.

```
83. size_type find_first_of(const CharT * s, size_type pos = 0) const;
```

Requires: `s` points to an array of at least `traits::length(s) + 1` elements of `CharT`.

Throws: Nothing

Returns: `find_first_of(basic_string(s), pos)`.

```
84. size_type find_first_of(CharT c, size_type pos = 0) const;
```

Requires: `s` points to an array of at least `traits::length(s) + 1` elements of `CharT`.

Throws: Nothing

Returns: `find_first_of(basic_string<CharT,traits,Allocator>(1,c), pos)`.

```
85. size_type find_last_of(const basic_string & str, size_type pos = npos) const;
```

Effects: Determines the highest position `xpos`, if possible, such that both of the following conditions obtain: a) `xpos <= pos` and `xpos < size()`; b) `traits::eq(at(xpos), str.at(I))` for some element `I` of the string controlled by `str`.

Throws: Nothing

Returns: `xpos` if the function can determine such a value for `xpos`. Otherwise, returns `npos`.

```
86. size_type find_last_of(const CharT * s, size_type pos, size_type n) const;
```

Requires: `s` points to an array of at least `n` elements of `CharT`.

Throws: Nothing

Returns: find_last_of(basic_string(s, n), pos).

```
87. size_type find_last_of(const CharT * s, size_type pos = npos) const;
```

Requires: s points to an array of at least traits::length(s) + 1 elements of CharT.

Throws: Nothing

Returns: find_last_of(basic_string<CharT,traits,Allocator>(l,c),pos).

```
88. size_type find_last_of(CharT c, size_type pos = npos) const;
```

Throws: Nothing

Returns: find_last_of(basic_string(s), pos).

```
89. size_type find_first_not_of(const basic_string & str, size_type pos = 0) const;
```

Effects: Determines the lowest position xpos, if possible, such that both of the following conditions obtain: a) pos <= xpos and xpos < size(); b) traits::eq(at(xpos), str.at(I)) for no element I of the string controlled by str.

Throws: Nothing

Returns: xpos if the function can determine such a value for xpos. Otherwise, returns npos.

```
90. size_type find_first_not_of(const CharT * s, size_type pos, size_type n) const;
```

Requires: s points to an array of at least traits::length(s) + 1 elements of CharT.

Throws: Nothing

Returns: find_first_not_of(basic_string(s, n), pos).

```
91. size_type find_first_not_of(const CharT * s, size_type pos = 0) const;
```

Requires: s points to an array of at least traits::length(s) + 1 elements of CharT.

Throws: Nothing

Returns: find_first_not_of(basic_string(s), pos).

```
92. size_type find_first_not_of(CharT c, size_type pos = 0) const;
```

Throws: Nothing

Returns: find_first_not_of(basic_string(l, c), pos).

```
93. size_type find_last_not_of(const basic_string & str, size_type pos = npos) const;
```

Effects: Determines the highest position xpos, if possible, such that both of the following conditions obtain: a) xpos <= pos and xpos < size(); b) traits::eq(at(xpos), str.at(I)) for no element I of the string controlled by str.

Throws: Nothing

Returns: xpos if the function can determine such a value for xpos. Otherwise, returns npos.

```
94. size_type find_last_not_of(const CharT * s, size_type pos, size_type n) const;
```

Requires: s points to an array of at least n elements of CharT.

Throws: Nothing

Returns: find_last_not_of(basic_string(s, n), pos).

```
95. size_type find_last_not_of(const CharT * s, size_type pos = npos) const;
```

Requires: s points to an array of at least traits::length(s) + 1 elements of CharT.

Throws: Nothing

Returns: find_last_not_of(basic_string(s), pos).

```
96. size_type find_last_not_of(CharT c, size_type pos = npos) const;
```

Throws: Nothing

Returns: find_last_not_of(basic_string(1, c), pos).

```
97. basic_string substr(size_type pos = 0, size_type n = npos) const;
```

Requires: Requires: pos <= size()

Effects: Determines the effective length rlen of the string to copy as the smaller of n and size() - pos.

Throws: If memory allocation throws or out_of_range if pos > size().

Returns: basic_string<CharT,traits,Allocator>(data()+pos,rlen).

```
98. int compare(const basic_string & str) const;
```

Effects: Determines the effective length rlen of the string to copy as the smaller of size() and str.size(). The function then compares the two strings by calling traits::compare(data(), str.data(), rlen).

Throws: Nothing

Returns: The nonzero result if the result of the comparison is nonzero. Otherwise, returns a value < 0 if size() < str.size(), a 0 value if size() == str.size(), and value > 0 if size() > str.size()

```
99. int compare(size_type pos1, size_type n1, const basic_string & str) const;
```

Requires: pos1 <= size()

Effects: Determines the effective length rlen of the string to copy as the smaller of

Throws: out_of_range if pos1 > size()

Returns: basic_string(*this,pos1,n1).compare(str).

```
100. int compare(size_type pos1, size_type n1, const basic_string & str,
              size_type pos2, size_type n2) const;
```

Requires: `pos1 <= size()` and `pos2 <= str.size()`

Effects: Determines the effective length `rlen` of the string to copy as the smaller of

Throws: `out_of_range` if `pos1 > size()` or `pos2 > str.size()`

Returns: `basic_string(*this, pos1, n1).compare(basic_string(str, pos2, n2))`.

```
Ⓐ int compare(const CharT * s) const;
```

Throws: Nothing

Returns: `compare(basic_string(s))`.

```
Ⓑ int compare(size_type pos1, size_type n1, const CharT * s, size_type n2) const;
```

Requires: `pos1 > size()` and `s` points to an array of at least `n2` elements of `CharT`.

Throws: `out_of_range` if `pos1 > size()`

Returns: `basic_string(*this, pos, n1).compare(basic_string(s, n2))`.

```
Ⓒ int compare(size_type pos1, size_type n1, const CharT * s) const;
```

Requires: `pos1 > size()` and `s` points to an array of at least `traits::length(s) + 1` elements of `CharT`.

Throws: `out_of_range` if `pos1 > size()`

Returns: `basic_string(*this, pos, n1).compare(basic_string(s, n2))`.

Struct `ordered_range_t`

`boost::container::ordered_range_t`

Synopsis

```
// In header: <boost/container/container_fwd.hpp>

struct ordered_range_t {
};
```

Description

Type used to tag that the input range is guaranteed to be ordered

Struct `ordered_unique_range_t`

`boost::container::ordered_unique_range_t`

Synopsis

```
// In header: <boost/container/container_fwd.hpp>

struct ordered_unique_range_t : public boost::container::ordered_range_t {
};
```

Description

Type used to tag that the input range is guaranteed to be ordered and unique

Global ordered_range

boost::container::ordered_range

Synopsis

```
// In header: <boost/container/container_fwd.hpp>

static const ordered_range_t ordered_range;
```

Description

Value used to tag that the input range is guaranteed to be ordered

Global ordered_unique_range

boost::container::ordered_unique_range

Synopsis

```
// In header: <boost/container/container_fwd.hpp>

static const ordered_unique_range_t ordered_unique_range;
```

Description

Value used to tag that the input range is guaranteed to be ordered and unique

Header <boost/container/deque.hpp>

```
namespace boost {
  namespace container {
    template<typename T, typename Allocator>
      bool operator==(const deque< T, Allocator > & x,
                     const deque< T, Allocator > & y);
    template<typename T, typename Allocator>
      bool operator<(const deque< T, Allocator > & x,
                    const deque< T, Allocator > & y);
    template<typename T, typename Allocator>
      bool operator!=(const deque< T, Allocator > & x,
                      const deque< T, Allocator > & y);
    template<typename T, typename Allocator>
      bool operator>(const deque< T, Allocator > & x,
                    const deque< T, Allocator > & y);
    template<typename T, typename Allocator>
      bool operator>=(const deque< T, Allocator > & x,
                     const deque< T, Allocator > & y);
    template<typename T, typename Allocator>
      bool operator<=(const deque< T, Allocator > & x,
                     const deque< T, Allocator > & y);
    template<typename T, typename Allocator>
      void swap(deque< T, Allocator > & x, deque< T, Allocator > & y);
  }
}
```

Header `<boost/container/flat_map.hpp>`

```

namespace boost {
namespace container {
template<typename Key, typename T, typename Compare, typename Allocator>
bool operator==(const flat_map< Key, T, Compare, Allocator > & x,
               const flat_map< Key, T, Compare, Allocator > & y);
template<typename Key, typename T, typename Compare, typename Allocator>
bool operator<(const flat_map< Key, T, Compare, Allocator > & x,
              const flat_map< Key, T, Compare, Allocator > & y);
template<typename Key, typename T, typename Compare, typename Allocator>
bool operator!=(const flat_map< Key, T, Compare, Allocator > & x,
               const flat_map< Key, T, Compare, Allocator > & y);
template<typename Key, typename T, typename Compare, typename Allocator>
bool operator>(const flat_map< Key, T, Compare, Allocator > & x,
              const flat_map< Key, T, Compare, Allocator > & y);
template<typename Key, typename T, typename Compare, typename Allocator>
bool operator<=(const flat_map< Key, T, Compare, Allocator > & x,
               const flat_map< Key, T, Compare, Allocator > & y);
template<typename Key, typename T, typename Compare, typename Allocator>
bool operator>=(const flat_map< Key, T, Compare, Allocator > & x,
               const flat_map< Key, T, Compare, Allocator > & y);
template<typename Key, typename T, typename Compare, typename Allocator>
void swap(flat_map< Key, T, Compare, Allocator > & x,
          flat_map< Key, T, Compare, Allocator > & y);
template<typename Key, typename T, typename Compare, typename Allocator>
bool operator==(const flat_multimap< Key, T, Compare, Allocator > & x,
               const flat_multimap< Key, T, Compare, Allocator > & y);
template<typename Key, typename T, typename Compare, typename Allocator>
bool operator<(const flat_multimap< Key, T, Compare, Allocator > & x,
              const flat_multimap< Key, T, Compare, Allocator > & y);
template<typename Key, typename T, typename Compare, typename Allocator>
bool operator!=(const flat_multimap< Key, T, Compare, Allocator > & x,
               const flat_multimap< Key, T, Compare, Allocator > & y);
template<typename Key, typename T, typename Compare, typename Allocator>
bool operator>(const flat_multimap< Key, T, Compare, Allocator > & x,
              const flat_multimap< Key, T, Compare, Allocator > & y);
template<typename Key, typename T, typename Compare, typename Allocator>
bool operator<=(const flat_multimap< Key, T, Compare, Allocator > & x,
               const flat_multimap< Key, T, Compare, Allocator > & y);
template<typename Key, typename T, typename Compare, typename Allocator>
bool operator>=(const flat_multimap< Key, T, Compare, Allocator > & x,
               const flat_multimap< Key, T, Compare, Allocator > & y);
template<typename Key, typename T, typename Compare, typename Allocator>
void swap(flat_multimap< Key, T, Compare, Allocator > & x,
          flat_multimap< Key, T, Compare, Allocator > & y);
}
}

```

Header <boost/container/flat_set.hpp>

```

namespace boost {
namespace container {
template<typename Key, typename Compare, typename Allocator>
bool operator==(const flat_set< Key, Compare, Allocator > & x,
               const flat_set< Key, Compare, Allocator > & y);
template<typename Key, typename Compare, typename Allocator>
bool operator<(const flat_set< Key, Compare, Allocator > & x,
              const flat_set< Key, Compare, Allocator > & y);
template<typename Key, typename Compare, typename Allocator>
bool operator!=(const flat_set< Key, Compare, Allocator > & x,
               const flat_set< Key, Compare, Allocator > & y);
template<typename Key, typename Compare, typename Allocator>
bool operator>(const flat_set< Key, Compare, Allocator > & x,
              const flat_set< Key, Compare, Allocator > & y);
template<typename Key, typename Compare, typename Allocator>
bool operator<=(const flat_set< Key, Compare, Allocator > & x,
               const flat_set< Key, Compare, Allocator > & y);
template<typename Key, typename Compare, typename Allocator>
bool operator>=(const flat_set< Key, Compare, Allocator > & x,
               const flat_set< Key, Compare, Allocator > & y);
template<typename Key, typename Compare, typename Allocator>
void swap(flat_set< Key, Compare, Allocator > & x,
         flat_set< Key, Compare, Allocator > & y);
template<typename Key, typename Compare, typename Allocator>
bool operator==(const flat_multiset< Key, Compare, Allocator > & x,
               const flat_multiset< Key, Compare, Allocator > & y);
template<typename Key, typename Compare, typename Allocator>
bool operator<(const flat_multiset< Key, Compare, Allocator > & x,
              const flat_multiset< Key, Compare, Allocator > & y);
template<typename Key, typename Compare, typename Allocator>
bool operator!=(const flat_multiset< Key, Compare, Allocator > & x,
               const flat_multiset< Key, Compare, Allocator > & y);
template<typename Key, typename Compare, typename Allocator>
bool operator>(const flat_multiset< Key, Compare, Allocator > & x,
              const flat_multiset< Key, Compare, Allocator > & y);
template<typename Key, typename Compare, typename Allocator>
bool operator<=(const flat_multiset< Key, Compare, Allocator > & x,
               const flat_multiset< Key, Compare, Allocator > & y);
template<typename Key, typename Compare, typename Allocator>
bool operator>=(const flat_multiset< Key, Compare, Allocator > & x,
               const flat_multiset< Key, Compare, Allocator > & y);
template<typename Key, typename Compare, typename Allocator>
void swap(flat_multiset< Key, Compare, Allocator > & x,
         flat_multiset< Key, Compare, Allocator > & y);
}
}

```

Header <boost/container/list.hpp>

```
namespace boost {
  namespace container {
    template<typename T, typename Allocator>
      bool operator==(const list< T, Allocator > & x,
                     const list< T, Allocator > & y);
    template<typename T, typename Allocator>
      bool operator<(const list< T, Allocator > & x,
                    const list< T, Allocator > & y);
    template<typename T, typename Allocator>
      bool operator!=(const list< T, Allocator > & x,
                      const list< T, Allocator > & y);
    template<typename T, typename Allocator>
      bool operator>(const list< T, Allocator > & x,
                     const list< T, Allocator > & y);
    template<typename T, typename Allocator>
      bool operator<=(const list< T, Allocator > & x,
                      const list< T, Allocator > & y);
    template<typename T, typename Allocator>
      bool operator>=(const list< T, Allocator > & x,
                      const list< T, Allocator > & y);
    template<typename T, typename Allocator>
      void swap(list< T, Allocator > & x, list< T, Allocator > & y);
  }
}
```

Header <boost/container/map.hpp>

```

namespace boost {
namespace container {
template<typename Key, typename T, typename Compare, typename Allocator>
bool operator==(const map< Key, T, Compare, Allocator > & x,
               const map< Key, T, Compare, Allocator > & y);
template<typename Key, typename T, typename Compare, typename Allocator>
bool operator<(const map< Key, T, Compare, Allocator > & x,
              const map< Key, T, Compare, Allocator > & y);
template<typename Key, typename T, typename Compare, typename Allocator>
bool operator!=(const map< Key, T, Compare, Allocator > & x,
               const map< Key, T, Compare, Allocator > & y);
template<typename Key, typename T, typename Compare, typename Allocator>
bool operator>(const map< Key, T, Compare, Allocator > & x,
              const map< Key, T, Compare, Allocator > & y);
template<typename Key, typename T, typename Compare, typename Allocator>
bool operator<=(const map< Key, T, Compare, Allocator > & x,
               const map< Key, T, Compare, Allocator > & y);
template<typename Key, typename T, typename Compare, typename Allocator>
bool operator>=(const map< Key, T, Compare, Allocator > & x,
               const map< Key, T, Compare, Allocator > & y);
template<typename Key, typename T, typename Compare, typename Allocator>
void swap(map< Key, T, Compare, Allocator > & x,
          map< Key, T, Compare, Allocator > & y);
template<typename Key, typename T, typename Compare, typename Allocator>
bool operator==(const multimap< Key, T, Compare, Allocator > & x,
               const multimap< Key, T, Compare, Allocator > & y);
template<typename Key, typename T, typename Compare, typename Allocator>
bool operator<(const multimap< Key, T, Compare, Allocator > & x,
              const multimap< Key, T, Compare, Allocator > & y);
template<typename Key, typename T, typename Compare, typename Allocator>
bool operator!=(const multimap< Key, T, Compare, Allocator > & x,
               const multimap< Key, T, Compare, Allocator > & y);
template<typename Key, typename T, typename Compare, typename Allocator>
bool operator>(const multimap< Key, T, Compare, Allocator > & x,
              const multimap< Key, T, Compare, Allocator > & y);
template<typename Key, typename T, typename Compare, typename Allocator>
bool operator<=(const multimap< Key, T, Compare, Allocator > & x,
               const multimap< Key, T, Compare, Allocator > & y);
template<typename Key, typename T, typename Compare, typename Allocator>
bool operator>=(const multimap< Key, T, Compare, Allocator > & x,
               const multimap< Key, T, Compare, Allocator > & y);
template<typename Key, typename T, typename Compare, typename Allocator>
void swap(multimap< Key, T, Compare, Allocator > & x,
          multimap< Key, T, Compare, Allocator > & y);
}
}

```

Header `<boost/container/scoped_allocator.hpp>`

```

namespace boost {
  namespace container {
    template<typename T> struct constructible_with_allocator_suffix;
    template<typename T> struct constructible_with_allocator_prefix;
    template<typename T, typename Alloc> struct uses_allocator;

    template<typename OuterAlloc, typename... InnerAllocs>
      class scoped_allocator_adaptor;
    template<typename OuterA1, typename OuterA2, typename... InnerAllocs>
      bool operator==(const scoped_allocator_adaptor< OuterA1, InnerAllocs... > & a,
                     const scoped_allocator_adaptor< OuterA2, InnerAllocs... > & b);
    template<typename OuterA1, typename OuterA2, typename... InnerAllocs>
      bool operator!=(const scoped_allocator_adaptor< OuterA1, InnerAllocs... > & a,
                     const scoped_allocator_adaptor< OuterA2, InnerAllocs... > & b);
  }
}

```

Struct template `constructible_with_allocator_suffix`

`boost::container::constructible_with_allocator_suffix`

Synopsis

```

// In header: <boost/container/scoped_allocator.hpp>

template<typename T>
struct constructible_with_allocator_suffix : public false_type {
};

```

Description

Remark: if a specialization is derived from `true_type`, indicates that `T` may be constructed with an allocator as its last constructor argument. Ideally, all constructors of `T` (including the copy and move constructors) should have a variant that accepts a final argument of `allocator_type`.

Requires: if a specialization is derived from `true_type`, `T` must have a nested type, `allocator_type` and at least one constructor for which `allocator_type` is the last parameter. If not all constructors of `T` can be called with a final `allocator_type` argument, and if `T` is used in a context where a container must call such a constructor, then the program is ill-formed.

[Example: `template <class T, class Allocator = allocator<T> > class Z { public: typedef Allocator allocator_type;`

`// Default constructor with optional allocator suffix Z(const allocator_type& a = allocator_type());`

`// Copy constructor and allocator-extended copy constructor Z(const Z& zz); Z(const Z& zz, const allocator_type& a); };`

`// Specialize trait for class template Z template <class T, class Allocator = allocator<T> > struct constructible_with_allocator_suffix<Z<T,Allocator> > : ::boost::true_type { };`

`<ndash></ndash>`

end example]

Note: This trait is a workaround inspired by "N2554: The Scoped Allocator Model (Rev 2)" (Pablo Halpern, 2008-02-29) to backport the scoped allocator model to C++03, as in C++03 there is no mechanism to detect if a type can be constructed from arbitrary arguments. Applications aiming portability with several compilers should always define this trait.

In conforming C++11 compilers or compilers supporting SFINAE expressions (when `BOOST_NO_SFINAE_EXPR` is NOT defined), this trait is ignored and C++11 rules will be used to detect if a type should be constructed with suffix or prefix allocator arguments.

Struct template `constructible_with_allocator_prefix`

`boost::container::constructible_with_allocator_prefix`

Synopsis

```
// In header: <boost/container/scoped_allocator.hpp>

template<typename T>
struct constructible_with_allocator_prefix : public false_type {
};
```

Description

Remark: if a specialization is derived from `true_type`, indicates that `T` may be constructed with `allocator_arg` and `T::allocator_type` as its first two constructor arguments. Ideally, all constructors of `T` (including the copy and move constructors) should have a variant that accepts these two initial arguments.

Requires: if a specialization is derived from `true_type`, `T` must have a nested type, `allocator_type` and at least one constructor for which `allocator_arg_t` is the first parameter and `allocator_type` is the second parameter. If not all constructors of `T` can be called with these initial arguments, and if `T` is used in a context where a container must call such a constructor, then the program is ill-formed.

[Example: `template <class T, class Allocator = allocator<T> > class Y { public: typedef Allocator allocator_type;`

`// Default constructor with and allocator-extended default constructor Y(); Y(allocator_arg_t, const allocator_type& a);`

`// Copy constructor and allocator-extended copy constructor Y(const Y& yy); Y(allocator_arg_t, const allocator_type& a, const Y& yy);`

`// Variadic constructor and allocator-extended variadic constructor template<class ...Args> Y(Args&& args...); template<class ...Args> Y(allocator_arg_t, const allocator_type& a, Args&&... args);`];

`// Specialize trait for class template Y template <class T, class Allocator = allocator<T> > struct constructible_with_allocator_prefix<Y<T,Allocator> > : ::boost::true_type { };`

`<ndash></ndash>`
end example]

Note: This trait is a workaround inspired by "N2554: The Scoped Allocator Model (Rev 2)" (Pablo Halpern, 2008-02-29) to backport the scoped allocator model to C++03, as in C++03 there is no mechanism to detect if a type can be constructed from arbitrary arguments. Applications aiming portability with several compilers should always define this trait.

In conforming C++11 compilers or compilers supporting SFINAE expressions (when `BOOST_NO_SFINAE_EXPR` is NOT defined), this trait is ignored and C++11 rules will be used to detect if a type should be constructed with suffix or prefix allocator arguments.

Struct template `uses_allocator`

`boost::container::uses_allocator`

Synopsis

```
// In header: <boost/container/scoped_allocator.hpp>

template<typename T, typename Alloc>
struct uses_allocator {
};
```

Description

Remark: Automatically detects if T has a nested `allocator_type` that is convertible from `Alloc`. Meets the `BinaryTypeTrait` requirements ([meta.rqmts] 20.4.1). A program may specialize this type to derive from `true_type` for a T of user-defined type if T does not have a nested `allocator_type` but is nonetheless constructible using the specified `Alloc`.

Result: derived from `true_type` if `Convertible<Alloc,T::allocator_type>` and derived from `false_type` otherwise.

Class template `scoped_allocator_adaptor`

`boost::container::scoped_allocator_adaptor`

Synopsis

```

// In header: <boost/container/scoped_allocator.hpp>

template<typename OuterAlloc, typename... InnerAllocs>
class scoped_allocator_adaptor {
public:
    // types
    typedef OuterAlloc                outer_allocator_type;
    typedef allocator_traits< OuterAlloc >    outer_traits_type;
    typedef base_type::inner_allocator_type    inner_allocator_type;
    typedef outer_traits_type::value_type      value_type;
    typedef outer_traits_type::size_type      size_type;
    typedef outer_traits_type::difference_type difference_type;
    typedef outer_traits_type::pointer        pointer;
    typedef outer_traits_type::const_pointer  const_pointer;
    typedef outer_traits_type::void_pointer   void_pointer;
    typedef outer_traits_type::const_void_pointer const_void_pointer;

    typedef base_type::propagate_on_container_copy_assignment propagate_on_container_copy_assignment;
    typedef base_type::propagate_on_container_move_assignment propagate_on_container_move_assignment;
    typedef base_type::propagate_on_container_swap             propagate_on_container_swap;

    // member classes/structs/unions
    template<typename U>
    struct rebind {
        // types
        typedef scoped_allocator_adaptor< typename outer_traits_type::template portable_rebind_allocator< U >::type, InnerAllocs... > other;
    };

    // construct/copy/destroy
    scoped_allocator_adaptor();
    scoped_allocator_adaptor(const scoped_allocator_adaptor &);
    scoped_allocator_adaptor(scoped_allocator_adaptor &&);
    template<typename OuterA2>
        scoped_allocator_adaptor(OuterA2 &&, const InnerAllocs &...);
    template<typename OuterA2>
        scoped_allocator_adaptor(const scoped_allocator_adaptor< OuterA2, InnerAllocs... > &);
    template<typename OuterA2>
        scoped_allocator_adaptor(scoped_allocator_adaptor< OuterA2, InnerAllocs... > &&);
    scoped_allocator_adaptor& operator=(const scoped_allocator_adaptor &);
    scoped_allocator_adaptor& operator=(scoped_allocator_adaptor &&);
    ~scoped_allocator_adaptor();

    // public member functions
    outer_allocator_type & outer_allocator();
    const outer_allocator_type & outer_allocator() const;
    inner_allocator_type & inner_allocator();
    inner_allocator_type const & inner_allocator() const;
    size_type max_size() const;
    template<typename T> void destroy(T *);

```

```

pointer allocate(size_type);
pointer allocate(size_type, const_void_pointer);
void deallocate(pointer, size_type);
scoped_allocator_adaptor select_on_container_copy_construction() const;
template<typename T, class... Args> void construct(T *, Args &&...);
template<typename T1, typename T2> void construct(std::pair< T1, T2 > *);
template<typename T1, typename T2> void construct(unspecified);
template<typename T1, typename T2, typename U, typename V>
    void construct(std::pair< T1, T2 > *, U &&, V &&);
template<typename T1, typename T2, typename U, typename V>
    void construct(unspecified, U &&, V &&);
template<typename T1, typename T2, typename U, typename V>
    void construct(std::pair< T1, T2 > *, const std::pair< U, V > &);
template<typename T1, typename T2, typename U, typename V>
    void construct(unspecified, unspecified);
template<typename T1, typename T2, typename U, typename V>
    void construct(std::pair< T1, T2 > *, std::pair< U, V > &&);
template<typename T1, typename T2, typename U, typename V>
    void construct(unspecified, unspecified);
};

```

Description

This class is a C++03-compatible implementation of `std::scoped_allocator_adaptor`. The class template `scoped_allocator_adaptor` is an allocator template that specifies the memory resource (the outer allocator) to be used by a container (as any other allocator does) and also specifies an inner allocator resource to be passed to the constructor of every element within the container.

This adaptor is instantiated with one outer and zero or more inner allocator types. If instantiated with only one allocator type, the inner allocator becomes the `scoped_allocator_adaptor` itself, thus using the same allocator resource for the container and every element within the container and, if the elements themselves are containers, each of their elements recursively. If instantiated with more than one allocator, the first allocator is the outer allocator for use by the container, the second allocator is passed to the constructors of the container's elements, and, if the elements themselves are containers, the third allocator is passed to the elements' elements, and so on. If containers are nested to a depth greater than the number of allocators, the last allocator is used repeatedly, as in the single-allocator case, for any remaining recursions.

[**Note:** The `scoped_allocator_adaptor` is derived from the outer allocator type so it can be substituted for the outer allocator type in most expressions. -end note]

In the construct member functions, `OUTERMOST(x)` is `x` if `x` does not have an `outer_allocator()` member function and `OUTERMOST(x.outer_allocator())` otherwise; `OUTERMOST_ALLOC_TRAITS(x)` is `allocator_traits<decltype(OUTERMOST(x))>`.

[**Note:** `OUTERMOST(x)` and `OUTERMOST_ALLOC_TRAITS(x)` are recursive operations. It is incumbent upon the definition of `outer_allocator()` to ensure that the recursion terminates. It will terminate for all instantiations of `scoped_allocator_adaptor`. -end note]

`scoped_allocator_adaptor` public types

1. typedef `allocator_traits< OuterAlloc > outer_traits_type;`

Type: For exposition only

2. typedef `base_type::inner_allocator_type inner_allocator_type;`

Type: `scoped_allocator_adaptor<OuterAlloc>` if `sizeof...(InnerAllocs)` is zero; otherwise, `scoped_allocator_adaptor<InnerAllocs...>`.

3. typedef `base_type::propagate_on_container_copy_assignment propagate_on_container_copy_assignment;`

Type: `true_type` if `allocator_traits<Allocator>::propagate_on_container_copy_assignment::value` is true for any Allocator in the set of `OuterAlloc` and `InnerAllocs...`; otherwise, `false_type`.

4. typedef base_type::propagate_on_container_move_assignment propagate_on_container_move_assignment;

Type: true_type if `allocator_traits<Allocator>::propagate_on_container_move_assignment::value` is true for any Allocator in the set of OuterAlloc and InnerAllocs...; otherwise, false_type.

5. typedef base_type::propagate_on_container_swap propagate_on_container_swap;

Type: true_type if `allocator_traits<Allocator>::propagate_on_container_swap::value` is true for any Allocator in the set of OuterAlloc and InnerAllocs...; otherwise, false_type.

scoped_allocator_adaptor public construct/copy/destroy

1.

```
scoped_allocator_adaptor();
```

Effects: value-initializes the OuterAlloc base class and the inner allocator object.

2.

```
scoped_allocator_adaptor(const scoped_allocator_adaptor & other);
```

Effects: initializes each allocator within the adaptor with the corresponding allocator from other.

3.

```
scoped_allocator_adaptor(scoped_allocator_adaptor && other);
```

Effects: move constructs each allocator within the adaptor with the corresponding allocator from other.

4.

```
template<typename OuterA2>
  scoped_allocator_adaptor(OuterA2 && outerAlloc,
                          const InnerAllocs &... innerAllocs);
```

Requires: OuterAlloc shall be constructible from OuterA2.

Effects: initializes the OuterAlloc base class with `boost::forward<OuterA2>(outerAlloc)` and inner with `innerAllocs...` (hence recursively initializing each allocator within the adaptor with the corresponding allocator from the argument list).

5.

```
template<typename OuterA2>
  scoped_allocator_adaptor(const scoped_allocator_adaptor< OuterA2, InnerAllocs... > & other);
```

Requires: OuterAlloc shall be constructible from OuterA2.

Effects: initializes each allocator within the adaptor with the corresponding allocator from other.

6.

```
template<typename OuterA2>
  scoped_allocator_adaptor(scoped_allocator_adaptor< OuterA2, InnerAllocs... > && other);
```

Requires: OuterAlloc shall be constructible from OuterA2.

Effects: initializes each allocator within the adaptor with the corresponding allocator rvalue from other.

7.

```
scoped_allocator_adaptor& operator=(const scoped_allocator_adaptor & other);
```

8.

```
scoped_allocator_adaptor& operator=(scoped_allocator_adaptor && other);
```

9.

```
~scoped_allocator_adaptor();
```

scoped_allocator_adaptor public member functions

1. `outer_allocator_type & outer_allocator();`

Returns: `static_cast<OuterAlloc>(*this)`.

2. `const outer_allocator_type & outer_allocator() const;`

Returns: `static_cast<const OuterAlloc>(*this)`.

3. `inner_allocator_type & inner_allocator();`

Returns: `*this` if `sizeof...(InnerAllocs)` is zero; otherwise, inner.

4. `inner_allocator_type const & inner_allocator() const;`

Returns: `*this` if `sizeof...(InnerAllocs)` is zero; otherwise, inner.

5. `size_type max_size() const;`

Returns: `allocator_traits<OuterAlloc>::max_size(outer_allocator())`.

6. `template<typename T> void destroy(T * p);`

Effects: calls `OUTERMOST_ALLOC_TRAITS(*this)::destroy(OUTERMOST(*this), p)`.

7. `pointer allocate(size_type n);`

Returns: `allocator_traits<OuterAlloc>::allocate(outer_allocator(), n)`.

8. `pointer allocate(size_type n, const_void_pointer hint);`

Returns: `allocator_traits<OuterAlloc>::allocate(outer_allocator(), n, hint)`.

9. `void deallocate(pointer p, size_type n);`

Effects: `allocator_traits<OuterAlloc>::deallocate(outer_allocator(), p, n)`.

10. `scoped_allocator_adaptor select_on_container_copy_construction() const;`

Returns: Allocator new `scoped_allocator_adaptor` object where each allocator A in the adaptor is initialized from the result of calling `allocator_traits<Allocator>::select_on_container_copy_construction()` on the corresponding allocator in `*this`.

11. `template<typename T, class... Args> void construct(T * p, Args &&... args);`

Effects: 1) If `uses_allocator<T, inner_allocator_type>::value` is false calls `OUTERMOST_ALLOC_TRAITS(*this)::construct(OUTERMOST(*this), p, std::forward<Args>(args)...)...`

2) Otherwise, if `uses_allocator<T, inner_allocator_type>::value` is true and `is_constructible<T, allocator_arg_t, inner_allocator_type, Args...>::value` is true, calls `OUTERMOST_ALLOC_TRAITS(*this)::construct(OUTERMOST(*this), p, allocator_arg, inner_allocator(), std::forward<Args>(args)...)...`.

[Note: In compilers without advanced decltype SFINAE support, `is_constructible` can't be implemented so that condition will be replaced by `constructible_with_allocator_prefix<T>::value`. -end note]

3) Otherwise, if `uses_allocator<T, inner_allocator_type>::value` is true and `is_constructible<T, Args..., inner_allocator_type>::value` is true, calls `OUTERMOST_ALLOC_TRAITS(*this)::construct(OUTERMOST(*this), p, std::forward<Args>(args)..., inner_allocator())`.

[Note: In compilers without advanced decltype SFINAE support, `is_constructible` can't be implemented so that condition will be replaced by `constructible_with_allocator_suffix<T>::value`. -end note]

4) Otherwise, the program is ill-formed.

[Note: An error will result if `uses_allocator` evaluates to true but the specific constructor does not take an allocator. This definition prevents a silent failure to pass an inner allocator to a contained element. -end note]

```
12. template<typename T1, typename T2> void construct(std::pair< T1, T2 > * p);
```

```
13. template<typename T1, typename T2> void construct( unspecified p );
```

```
14. template<typename T1, typename T2, typename U, typename V>
    void construct(std::pair< T1, T2 > * p, U && x, V && y);
```

```
15. template<typename T1, typename T2, typename U, typename V>
    void construct( unspecified p, U && x, V && y );
```

```
16. template<typename T1, typename T2, typename U, typename V>
    void construct(std::pair< T1, T2 > * p, const std::pair< U, V > & x);
```

```
17. template<typename T1, typename T2, typename U, typename V>
    void construct( unspecified p, unspecified x );
```

```
18. template<typename T1, typename T2, typename U, typename V>
    void construct(std::pair< T1, T2 > * p, std::pair< U, V > && x);
```

```
19. template<typename T1, typename T2, typename U, typename V>
    void construct( unspecified p, unspecified x );
```

Struct template rebind

`boost::container::scoped_allocator_adaptor::rebind`

Synopsis

```
// In header: <boost/container/scoped_allocator.hpp>

template<typename U>
struct rebind {
    // types
    typedef scoped_allocator_adaptor< typename outer_traits_type::template portable_rebind_al-
loc< U >::type, InnerAllocs... > other;
};
```

Description

Type: Rebinds scoped allocator to `typedef `scoped_allocator_adaptor` < typename outer_traits_type::template portable_rebind_al-loc<U>::type , InnerAllocs... >

Header <boost/container/scoped_allocator_fwd.hpp>

```
namespace boost {
    namespace container {
        struct allocator_arg_t;

        static const allocator_arg_t allocator_arg;
    }
}
```

Struct allocator_arg_t

boost::container::allocator_arg_t

Synopsis

```
// In header: <boost/container/scoped_allocator_fwd.hpp>

struct allocator_arg_t {
};
```

Description

The `allocator_arg_t` struct is an empty structure type used as a unique type to disambiguate constructor and function overloading. Specifically, several types have constructors with `allocator_arg_t` as the first argument, immediately followed by an argument of a type that satisfies the Allocator requirements

Global allocator_arg

boost::container::allocator_arg

Synopsis

```
// In header: <boost/container/scoped_allocator_fwd.hpp>

static const allocator_arg_t allocator_arg;
```

Description

A instance of type `allocator_arg_t`

Header <boost/container/set.hpp>

```
namespace boost {
namespace container {
template<typename Key, typename Compare, typename Allocator>
bool operator==(const set< Key, Compare, Allocator > & x,
               const set< Key, Compare, Allocator > & y);
template<typename Key, typename Compare, typename Allocator>
bool operator<(const set< Key, Compare, Allocator > & x,
              const set< Key, Compare, Allocator > & y);
template<typename Key, typename Compare, typename Allocator>
bool operator!=(const set< Key, Compare, Allocator > & x,
               const set< Key, Compare, Allocator > & y);
template<typename Key, typename Compare, typename Allocator>
bool operator>(const set< Key, Compare, Allocator > & x,
              const set< Key, Compare, Allocator > & y);
template<typename Key, typename Compare, typename Allocator>
bool operator<=(const set< Key, Compare, Allocator > & x,
               const set< Key, Compare, Allocator > & y);
template<typename Key, typename Compare, typename Allocator>
bool operator>=(const set< Key, Compare, Allocator > & x,
               const set< Key, Compare, Allocator > & y);
template<typename Key, typename Compare, typename Allocator>
void swap(set< Key, Compare, Allocator > & x,
         set< Key, Compare, Allocator > & y);
template<typename Key, typename Compare, typename Allocator>
bool operator==(const multiset< Key, Compare, Allocator > & x,
               const multiset< Key, Compare, Allocator > & y);
template<typename Key, typename Compare, typename Allocator>
bool operator<(const multiset< Key, Compare, Allocator > & x,
              const multiset< Key, Compare, Allocator > & y);
template<typename Key, typename Compare, typename Allocator>
bool operator!=(const multiset< Key, Compare, Allocator > & x,
               const multiset< Key, Compare, Allocator > & y);
template<typename Key, typename Compare, typename Allocator>
bool operator>(const multiset< Key, Compare, Allocator > & x,
              const multiset< Key, Compare, Allocator > & y);
template<typename Key, typename Compare, typename Allocator>
bool operator<=(const multiset< Key, Compare, Allocator > & x,
               const multiset< Key, Compare, Allocator > & y);
template<typename Key, typename Compare, typename Allocator>
bool operator>=(const multiset< Key, Compare, Allocator > & x,
               const multiset< Key, Compare, Allocator > & y);
template<typename Key, typename Compare, typename Allocator>
void swap(multiset< Key, Compare, Allocator > & x,
         multiset< Key, Compare, Allocator > & y);
}
}
```

Header <boost/container/slist.hpp>

```

namespace boost {
  namespace container {
    template<typename T, typename Allocator>
      bool operator==(const slist< T, Allocator > & x,
                     const slist< T, Allocator > & y);
    template<typename T, typename Allocator>
      bool operator<(const slist< T, Allocator > & sL1,
                    const slist< T, Allocator > & sL2);
    template<typename T, typename Allocator>
      bool operator!=(const slist< T, Allocator > & sL1,
                      const slist< T, Allocator > & sL2);
    template<typename T, typename Allocator>
      bool operator>(const slist< T, Allocator > & sL1,
                    const slist< T, Allocator > & sL2);
    template<typename T, typename Allocator>
      bool operator<=(const slist< T, Allocator > & sL1,
                      const slist< T, Allocator > & sL2);
    template<typename T, typename Allocator>
      bool operator>=(const slist< T, Allocator > & sL1,
                      const slist< T, Allocator > & sL2);
    template<typename T, typename Allocator>
      void swap(slist< T, Allocator > & x, slist< T, Allocator > & y);
  }
}

```

Header <boost/container/stable_vector.hpp>

```

namespace boost {
  namespace container {
    template<typename T, typename Allocator>
      bool operator==(const stable_vector< T, Allocator > & x,
                     const stable_vector< T, Allocator > & y);
    template<typename T, typename Allocator>
      bool operator<(const stable_vector< T, Allocator > & x,
                    const stable_vector< T, Allocator > & y);
    template<typename T, typename Allocator>
      bool operator!=(const stable_vector< T, Allocator > & x,
                      const stable_vector< T, Allocator > & y);
    template<typename T, typename Allocator>
      bool operator>(const stable_vector< T, Allocator > & x,
                    const stable_vector< T, Allocator > & y);
    template<typename T, typename Allocator>
      bool operator>=(const stable_vector< T, Allocator > & x,
                      const stable_vector< T, Allocator > & y);
    template<typename T, typename Allocator>
      bool operator<=(const stable_vector< T, Allocator > & x,
                      const stable_vector< T, Allocator > & y);
    template<typename T, typename Allocator>
      void swap(stable_vector< T, Allocator > & x,
                stable_vector< T, Allocator > & y);
  }
}

```

Header <boost/container/string.hpp>

```

namespace boost {
namespace container {
    typedef basic_string< char, std::char_traits< char >, std::allocator< char > > string;
    typedef basic_string< wchar_t, std::char_traits< wchar_t >, std::allocator< wchar_t > > wstring;
    template<typename CharT, typename Traits, typename Allocator>
        basic_string< CharT, Traits, Allocator >
        operator+(const basic_string< CharT, Traits, Allocator > & x,
            const basic_string< CharT, Traits, Allocator > & y);
    template<typename CharT, typename Traits, typename Allocator>
        basic_string< CharT, Traits, Allocator >
        operator+(basic_string< CharT, Traits, Allocator > && mx,
            basic_string< CharT, Traits, Allocator > && my);
    template<typename CharT, typename Traits, typename Allocator>
        basic_string< CharT, Traits, Allocator >
        operator+(basic_string< CharT, Traits, Allocator > && mx,
            const basic_string< CharT, Traits, Allocator > & y);
    template<typename CharT, typename Traits, typename Allocator>
        basic_string< CharT, Traits, Allocator >
        operator+(const basic_string< CharT, Traits, Allocator > & x,
            basic_string< CharT, Traits, Allocator > && my);
    template<typename CharT, typename Traits, typename Allocator>
        basic_string< CharT, Traits, Allocator >
        operator+(const CharT * s, basic_string< CharT, Traits, Allocator > y);
    template<typename CharT, typename Traits, typename Allocator>
        basic_string< CharT, Traits, Allocator >
        operator+(basic_string< CharT, Traits, Allocator > x, const CharT * s);
    template<typename CharT, typename Traits, typename Allocator>
        basic_string< CharT, Traits, Allocator >
        operator+(CharT c, basic_string< CharT, Traits, Allocator > y);
    template<typename CharT, typename Traits, typename Allocator>
        basic_string< CharT, Traits, Allocator >
        operator+(basic_string< CharT, Traits, Allocator > x, const CharT c);
    template<typename CharT, typename Traits, typename Allocator>
        bool operator==(const basic_string< CharT, Traits, Allocator > & x,
            const basic_string< CharT, Traits, Allocator > & y);
    template<typename CharT, typename Traits, typename Allocator>
        bool operator==(const CharT * s,
            const basic_string< CharT, Traits, Allocator > & y);
    template<typename CharT, typename Traits, typename Allocator>
        bool operator==(const basic_string< CharT, Traits, Allocator > & x,
            const CharT * s);
    template<typename CharT, typename Traits, typename Allocator>
        bool operator!=(const basic_string< CharT, Traits, Allocator > & x,
            const basic_string< CharT, Traits, Allocator > & y);
    template<typename CharT, typename Traits, typename Allocator>
        bool operator!=(const CharT * s,
            const basic_string< CharT, Traits, Allocator > & y);
    template<typename CharT, typename Traits, typename Allocator>
        bool operator!=(const basic_string< CharT, Traits, Allocator > & x,
            const CharT * s);
    template<typename CharT, typename Traits, typename Allocator>
        bool operator<(const basic_string< CharT, Traits, Allocator > & x,
            const basic_string< CharT, Traits, Allocator > & y);
    template<typename CharT, typename Traits, typename Allocator>
        bool operator<(const CharT * s,
            const basic_string< CharT, Traits, Allocator > & y);
    template<typename CharT, typename Traits, typename Allocator>
        bool operator<(const basic_string< CharT, Traits, Allocator > & x,
            const CharT * s);
    template<typename CharT, typename Traits, typename Allocator>

```

```

    bool operator>(const basic_string< CharT, Traits, Allocator > & x,
                  const basic_string< CharT, Traits, Allocator > & y);
template<typename CharT, typename Traits, typename Allocator>
    bool operator>(const CharT * s,
                  const basic_string< CharT, Traits, Allocator > & y);
template<typename CharT, typename Traits, typename Allocator>
    bool operator>(const basic_string< CharT, Traits, Allocator > & x,
                  const CharT * s);
template<typename CharT, typename Traits, typename Allocator>
    bool operator<=(const basic_string< CharT, Traits, Allocator > & x,
                   const basic_string< CharT, Traits, Allocator > & y);
template<typename CharT, typename Traits, typename Allocator>
    bool operator<=(const CharT * s,
                   const basic_string< CharT, Traits, Allocator > & y);
template<typename CharT, typename Traits, typename Allocator>
    bool operator<=(const basic_string< CharT, Traits, Allocator > & x,
                   const CharT * s);
template<typename CharT, typename Traits, typename Allocator>
    bool operator>=(const basic_string< CharT, Traits, Allocator > & x,
                   const basic_string< CharT, Traits, Allocator > & y);
template<typename CharT, typename Traits, typename Allocator>
    bool operator>=(const CharT * s,
                   const basic_string< CharT, Traits, Allocator > & y);
template<typename CharT, typename Traits, typename Allocator>
    bool operator>=(const basic_string< CharT, Traits, Allocator > & x,
                   const CharT * s);
template<typename CharT, typename Traits, typename Allocator>
    void swap(basic_string< CharT, Traits, Allocator > & x,
             basic_string< CharT, Traits, Allocator > & y);
template<typename CharT, typename Traits, typename Allocator>
    std::basic_ostream< CharT, Traits > &
    operator<<(std::basic_ostream< CharT, Traits > & os,
             const basic_string< CharT, Traits, Allocator > & s);
template<typename CharT, typename Traits, typename Allocator>
    std::basic_istream< CharT, Traits > &
    operator>>(std::basic_istream< CharT, Traits > & is,
             basic_string< CharT, Traits, Allocator > & s);
template<typename CharT, typename Traits, typename Allocator>
    std::basic_istream< CharT, Traits > &
    getline(std::istream & is, basic_string< CharT, Traits, Allocator > & s,
           CharT delim);
template<typename CharT, typename Traits, typename Allocator>
    std::basic_istream< CharT, Traits > &
    getline(std::basic_istream< CharT, Traits > & is,
           basic_string< CharT, Traits, Allocator > & s);
template<typename Ch, typename Allocator>
    std::size_t hash_value(basic_string< Ch, std::char_traits< Ch >, Allocator > const & v);
}
}

```

Type definition string

string

Synopsis

```

// In header: <boost/container/string.hpp>

typedef basic_string< char, std::char_traits< char >, std::allocator< char > > string;

```

Description

Typedef for a [basic_string](#) of narrow characters

Type definition wstring

wstring

Synopsis

```
// In header: <boost/container/string.hpp>

typedef basic_string< wchar_t, std::char_traits< wchar_t >, std::allocator< wchar_t > > wstring;
```

Description

Typedef for a [basic_string](#) of narrow characters

Header <boost/container/vector.hpp>

```
namespace boost {
  namespace container {
    template<typename T, typename Allocator>
      bool operator==(const vector< T, Allocator > & x,
                     const vector< T, Allocator > & y);
    template<typename T, typename Allocator>
      bool operator!=(const vector< T, Allocator > & x,
                     const vector< T, Allocator > & y);
    template<typename T, typename Allocator>
      bool operator<(const vector< T, Allocator > & x,
                   const vector< T, Allocator > & y);
    template<typename T, typename Allocator>
      void swap(vector< T, Allocator > & x, vector< T, Allocator > & y);
  }
}
```

Acknowledgements, notes and links

- Original standard container code comes from [SGI STL library](#), which enhanced the original HP STL code. Most of this code was rewritten for **Boost.Interprocess** and moved to **Boost.Intrusive**. `deque` and `string` containers still have fragments of the original SGI code. Many thanks to Alexander Stepanov, Meng Lee, David Musser, Matt Austern... and all HP and SGI STL developers.
- `flat_[multi]_map/set` containers were originally based on [Loki's AssocVector](#) class. Code was rewritten and expanded for **Boost.Interprocess**, so thanks to Andrei Alexandrescu.
- `stable_vector` was invented and coded by [Joaquín M. López Muñoz](#), then adapted for **Boost.Interprocess**. Thanks for such a great container.
- Howard Hinnant's help and advices were essential when implementing move semantics, improving allocator support or implementing small string optimization. Thanks Howard for your wonderful standard library implementations.
- And finally thanks to all Boosters who helped all these years, improving, fixing and reviewing all my libraries.

Release Notes

Boost 1.53 Release

- Fixed bug #7650.
- Improved `vector`'s insertion performance.
- Changed again experimental multiallocation interface for better performance (still experimental).
- Added no exception support for those willing to disable exceptions in their compilers.
- Fixed GCC -Wshadow warnings.
- Replaced deprecated `BOOST_NO_XXXX` with newer `BOOST_NO_CXX11_XXX` macros.

Boost 1.52 Release

- Improved `stable_vector`'s template code bloat and type safety.
- Changed typedefs and reordered functions of sequence containers to improve doxygen documentation.
- Fixed bugs #6615, #7139, #7215, #7232, #7269, #7439.
- Implemented LWG Issue #149 (range insertion now returns an iterator) & cleaned up insertion code in most containers
- Corrected aliasing errors.

Boost 1.51 Release

- Fixed bugs #6763, #6803, #7114, #7103, #7123,

Boost 1.50 Release

- Added Scoped Allocator Model support.
- Fixed bugs #6606, #6533, #6536, #6566, #6575,

Boost 1.49 Release

- Fixed bugs #6540, #6499, #6336, #6335, #6287, #6205, #4383.
- Added `allocator_traits` support for both C++11 and C++03 compilers through an internal `allocator_traits` clone.

Boost 1.48 Release

- First release. Container code from **Boost.Interprocess** was deleted and redirected to **Boost.Container** via using directives.